

## 6CXN36 8 Ω

- 8 ohm LF unit, 16 ohm HF unit
- 200 W continuous program power capacity
- 90° nominal coverage
- 90 - 18000 Hz response
- 90 dB sensitivity
- Aluminium demodulating ring for very low distortion

Unique to B&C, a complete lineup of high sensitivity and power handling 4", 5" and 6.5" frame transducers. These high technology products are made with our famously critical quality control, allowing new compact loudspeaker designs with appropriately scaled performance. Combined with a 1.4" dome compression driver, our 6CXN36 coaxial is one of the most compact and cost effective full range transducers that we have ever built, offering 90 - 18000Hz frequency response and a 90° conical coverage pattern.



**6CXN36** 8 Ω**GENERAL**

Nominal Diameter	<b>165 mm (6.5 in)</b>
Nominal Impedance	<b>8 Ω</b>
Frequency Range	<b>90 Hz - 18000 Hz</b>
Dispersion Angle	<b>90 °</b>
Included by -6 dB down points.	

**PARAMETERS**

Fs	<b>90 Hz</b>
Re	<b>5.8 Ω</b>
Qes	<b>1.17</b>
Qms	<b>5</b>
Qts	<b>0.95</b>
Vas	<b>7.5 dm<sup>3</sup> (0.26 ft<sup>3</sup>)</b>
Sd	<b>132 cm<sup>2</sup> (20.46 in<sup>2</sup>)</b>
η0	<b>0.45 %</b>
Xvar	<b>5 mm</b>
Mms	<b>10.2 g</b>
Bl	<b>5.34 Tm</b>
Le	<b>0.94 mH</b>
EBP	<b>77 Hz</b>

**SPECIFICATIONS HF UNIT**

Nominal Diameter	<b>165 mm (6.5 in)</b>
Nominal Impedance	<b>16 Ω</b>
Minimum Impedance	<b>10.2 Ω</b>
Nominal Power Handling	<b>25 W</b>
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	<b>50 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>100 dB</b>
Applied RMS Voltage is set to 4V	
Recommended Crossover	<b>2 kHz</b>
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	<b>36 mm (1.4 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.14 mH</b>
Flux Density	<b>1.65 T</b>
Diaphragm Material	<b>HT Polymer</b>

**SPECIFICATIONS LF UNIT**

Nominal Diameter	<b>165 mm (6.5 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>6.8 Ω</b>
Nominal Power Handling	<b>100 W</b>
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	<b>200 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>90 dB</b>
Applied RMS Voltage is set to 2.83V.	
Voice Coil Diameter	<b>34 mm (1.3 in)</b>
Winding Material	<b>Copper</b>
Former Material	<b>Glass Fibre</b>
Winding Depth	<b>11 mm (0.43 in)</b>
Magnetic Gap Depth	<b>6 mm (0.24 in)</b>
Flux Density	<b>0.74 T</b>
Woofer Cone Treatment	<b>WP Waterproof Front Side</b>

**DESIGN**

Magnet Material	<b>Neodymium Ring</b>
Woofer Cone Treatment	<b>WP Waterproof Front Side</b>

**MOUNTING AND SHIPPING INFO**

Overall Diameter	<b>180 mm (7.09 in)</b>
Bolt Circle Diameter	<b>165 mm (6.5 in)</b>
Baffle Cutout Diameter	<b>146 mm (5.75 in)</b>
Depth	<b>91 mm (3.58 in)</b>
Flange and Gasket Thickness	<b>6 mm (0.25 in)</b>
Net Weight	<b>0.7 kg (1.54 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>1.15 kg (2.54 lb)</b>
Shipping Box	<b>255x255x150 mm (10.04x10.04x5.91 in)</b>



**CROSSOVER**

FBCXN36	<b>8 Ω</b>
---------	------------



**SERVICE KITS**

HF replacement-diaphragm	<b>MMDDE11016</b>
LF recone-kits	<b>RCK006CXN368</b>


## 6CXN36 8 Ω

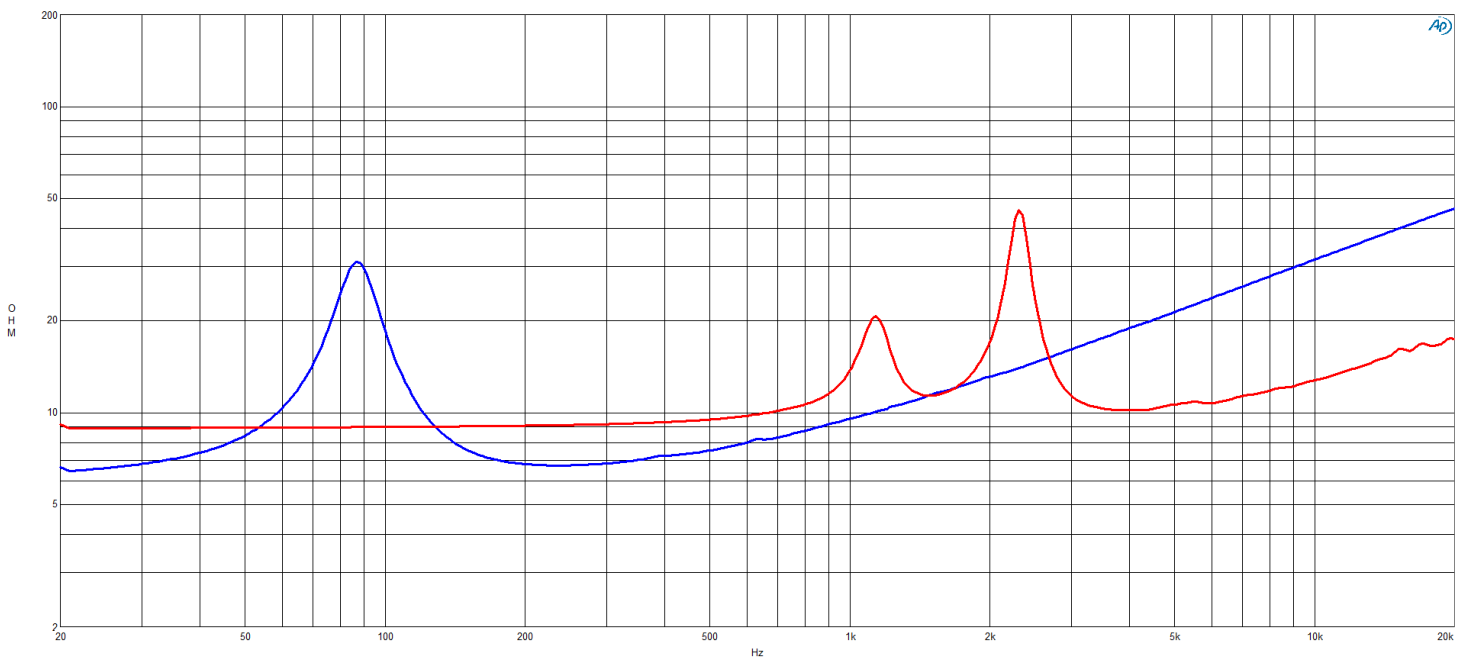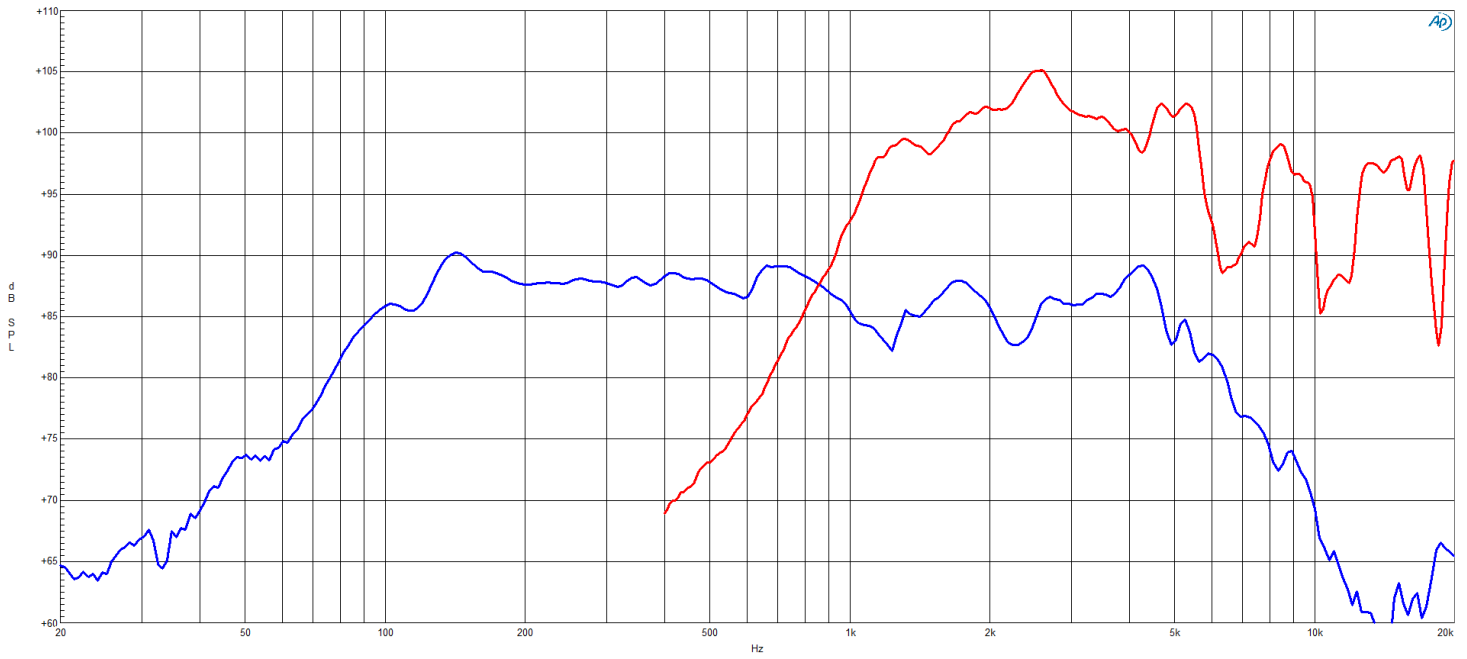

6CXN36 8 Ω

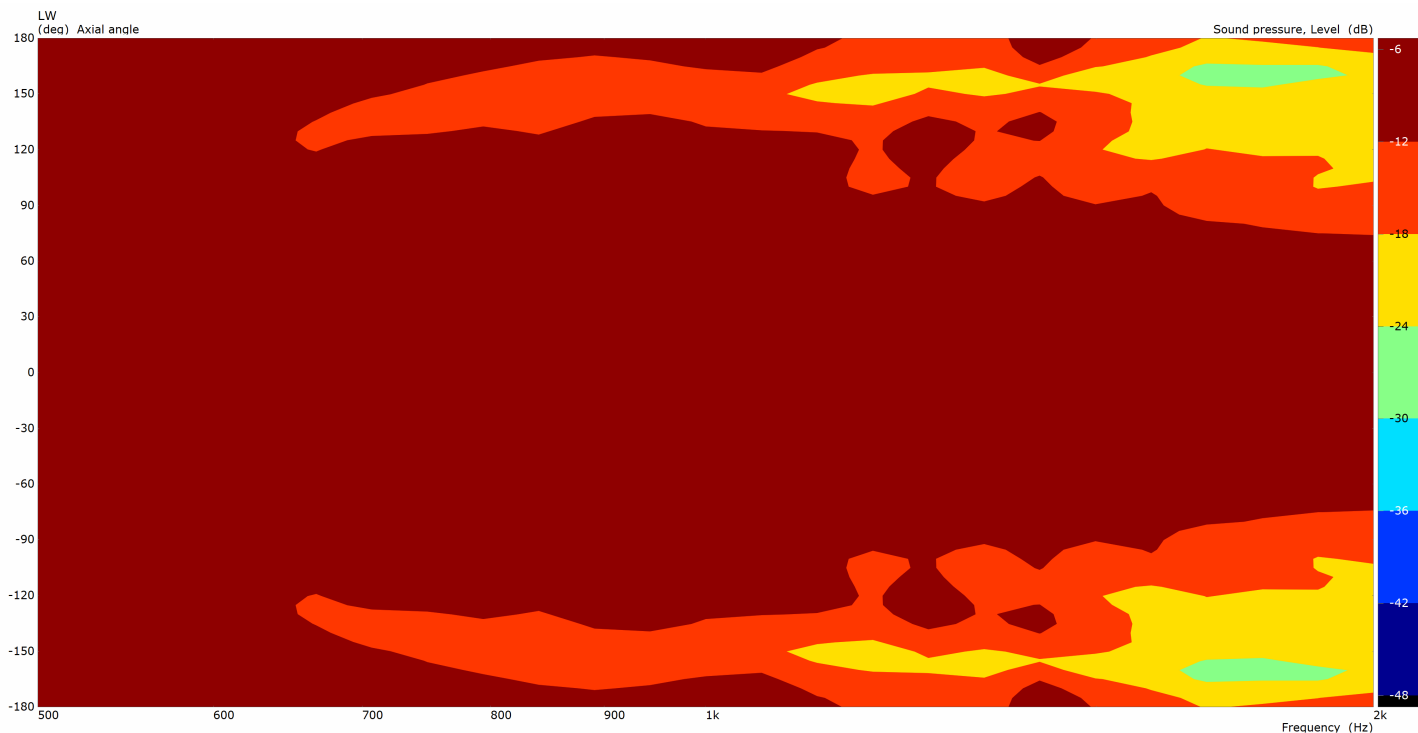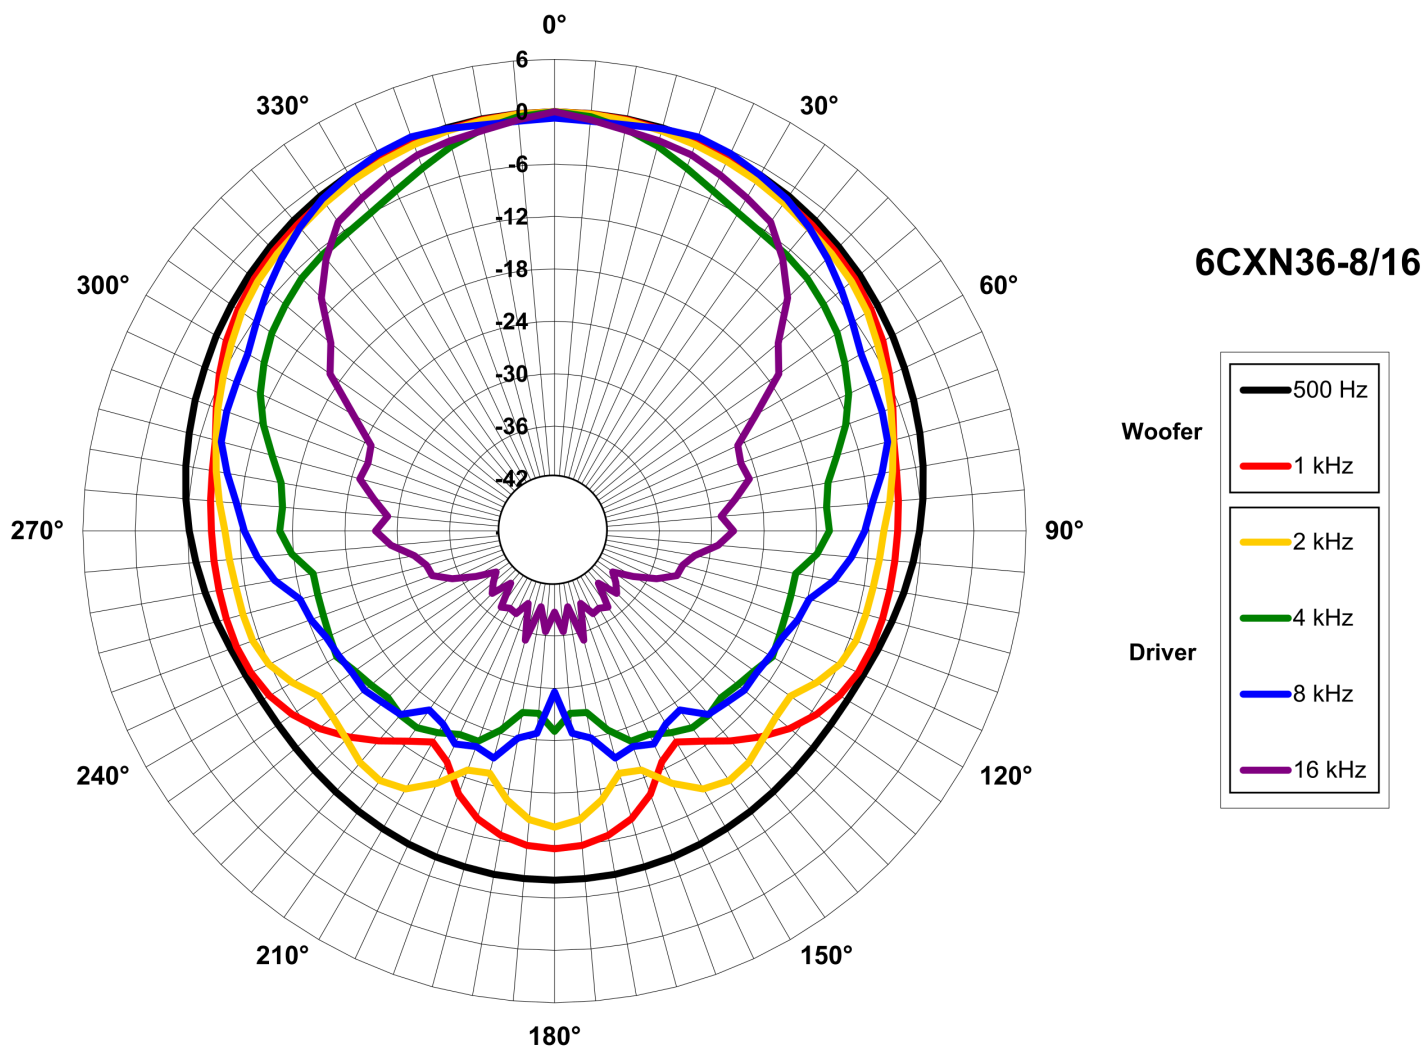

## 6CXN36 8 Ω

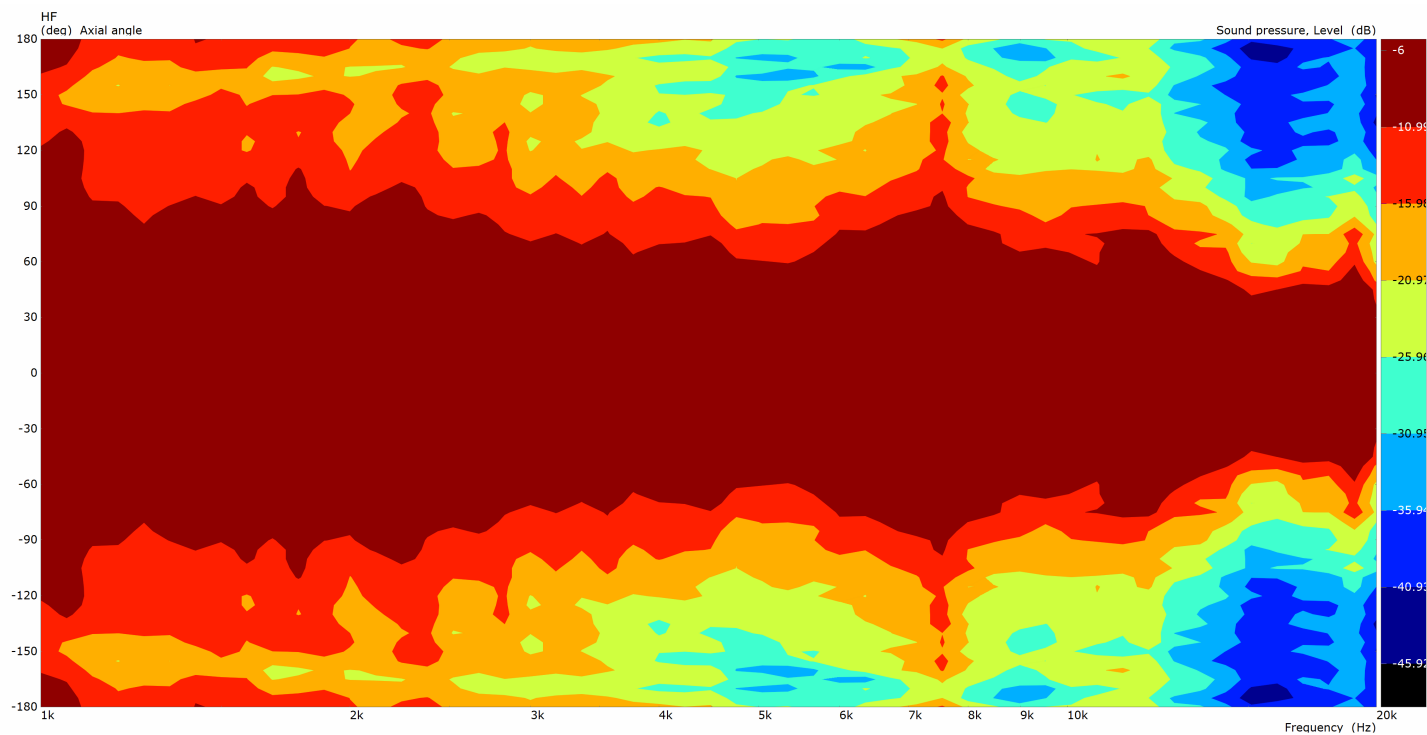

6CXN36 8 Ω

