

LF Drivers

Ø 10 inches

10MD26 8 Ω

Mid-Bass

- 700 W continuous program power capacity
- 76 mm (3 in) aluminium voice coil
- 80 - 4000 Hz response
- 100 dB sensitivity



SPECIFICATIONS

| | |
|---|------------------------|
| Nominal Diameter | 250 mm (10 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 7.2 Ω |
| Nominal Power Handling | 350 W |
| 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air. | |
| Continuous Power Handling | 700 W |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating. | |
| Sensitivity | 100 dB |
| Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance. | |
| Frequency Range | 80 Hz - 4000 Hz |
| Voice Coil Diameter | 76 mm (3 in) |
| Winding Material | Aluminium |
| Former Material | Glass Fibre |
| Winding Depth | 11 mm (0.43 in) |
| Magnetic Gap Depth | 8 mm (0.31 in) |
| Flux Density | 1.45 T |
| Woofer Cone Treatment | None |

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

| | |
|------|---|
| Fs | 76 Hz |
| Re | 5.8 Ω |
| Qes | 0.22 |
| Qms | 4.8 |
| Qts | 0.21 |
| Vas | 20 dm³ (0.71 ft³) |
| Sd | 320 cm² (49.1 in²) |
| η0 | 3.9 % |
| Xmax | 1.5 mm |
| Xvar | 4.5 mm |
| Mms | 31 g |
| Bl | 19.6 Tm |
| Le | 1.2 mH |
| EBP | 345 Hz |

DESIGN

| | |
|-----------------------|--------------------|
| Surround Shape | Double Roll |
| Cone Shape | Exponential |
| Magnet Material | Ferrite |
| Spider | Single |
| Pole Design | T-Pole |
| Woofer Cone Treatment | None |

MOUNTING AND SHIPPING INFO

| | |
|-------------------------------|---|
| Overall Diameter | 262 mm (10.3 in) |
| Bolt Circle Diameter | 245 mm (9.6 in) |
| Baffle Cutout Diameter | 230 mm (8.8 in) |
| Depth | 124 mm (4.9 in) |
| Flange and Gasket Thickness | 14 mm (0.55 in) |
| Air Volume Occupied by Driver | 2.6 dm³ (0.09 ft³) |
| Net Weight | 7.25 kg (15.98 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 7.85 kg (17.31 lb) |
| Shipping Box | 295x314x175 mm (11.61x12.36x6.89 in) |

SERVICE KITS



| | |
|----------------|--------------------|
| LF recone-kits | RCK010MD268 |
|----------------|--------------------|

LF Drivers

Ø 10 inches

10MD26 8 Ω

Mid-Bass

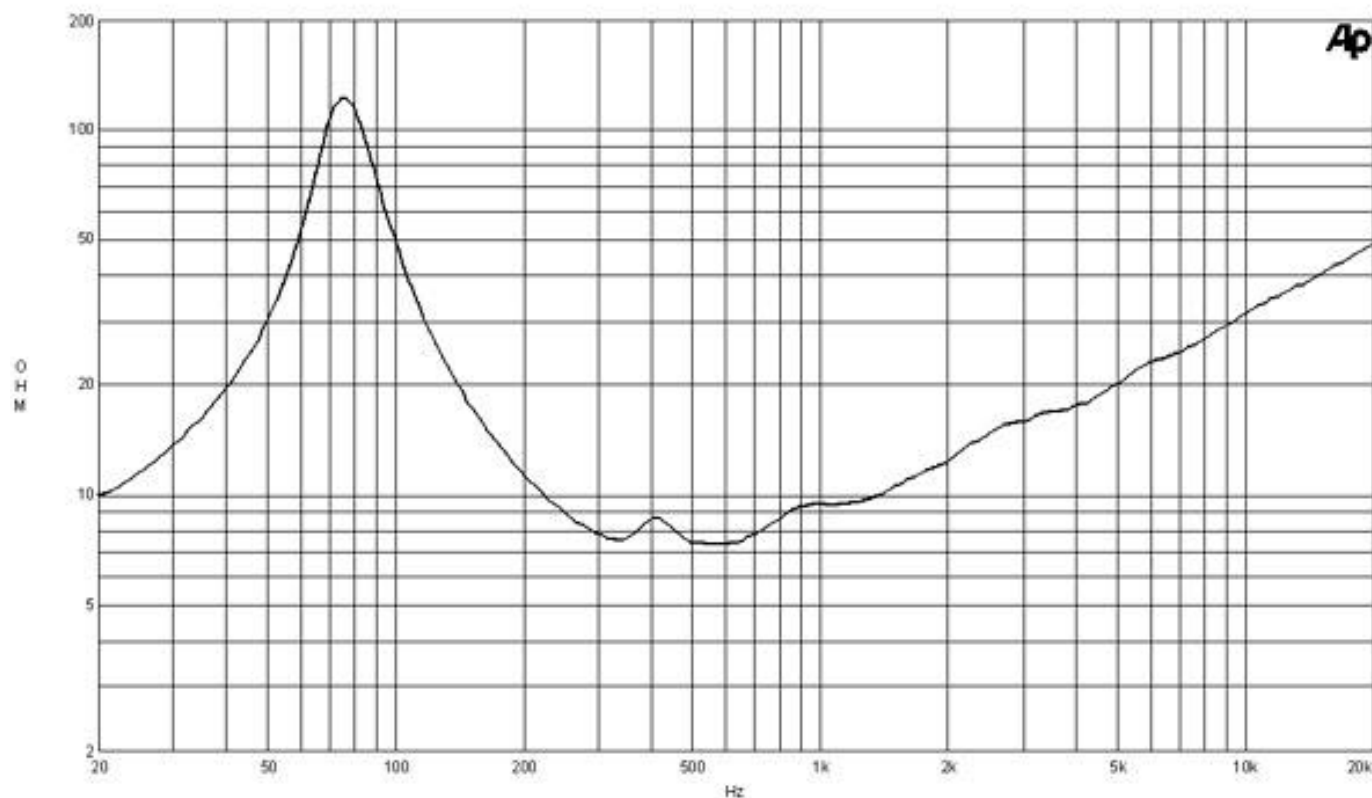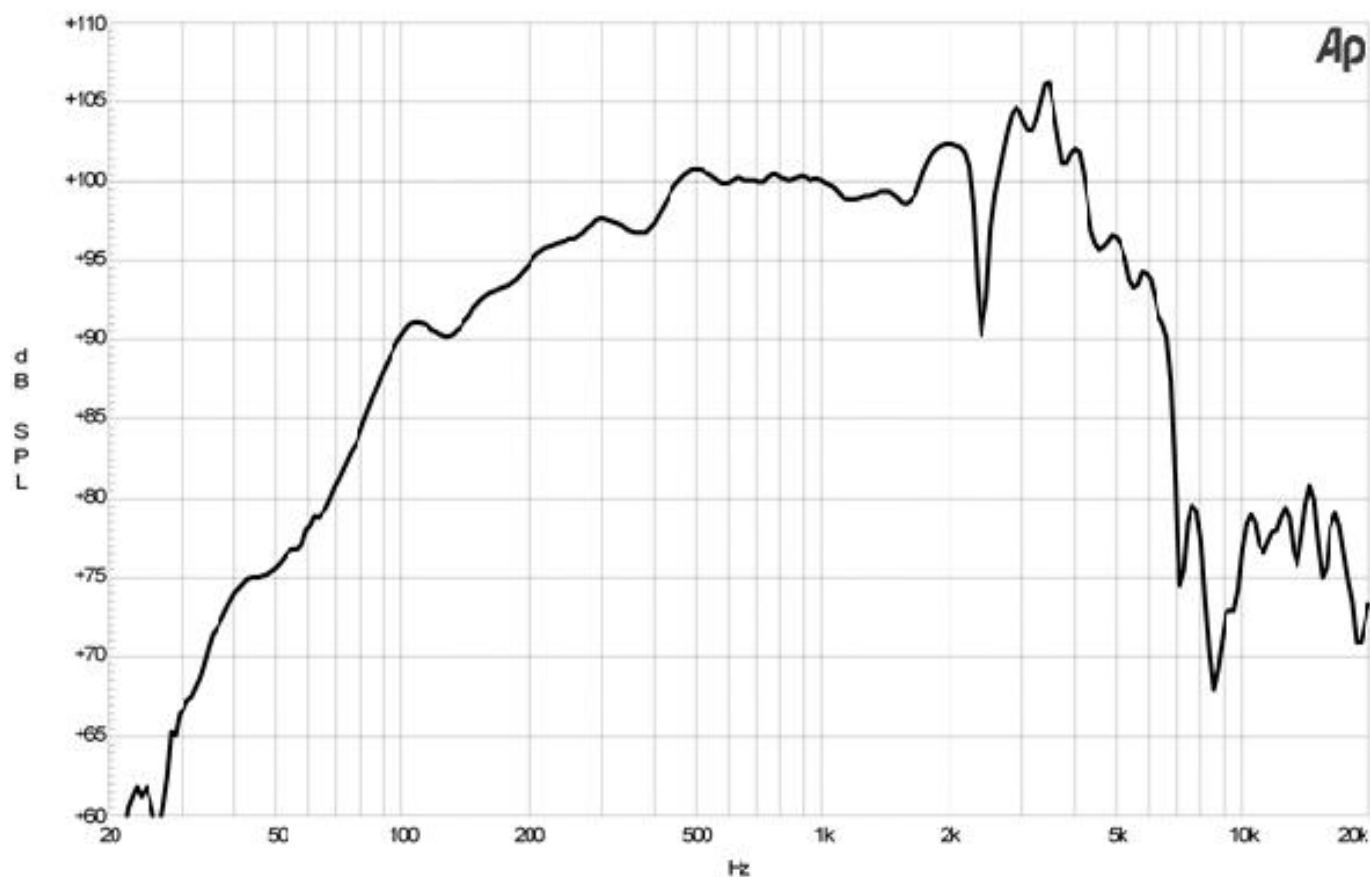

LF Drivers

Ø 10 inches

10MD26 8 Ω

Mid-Bass

