

## DE7 4 Ω

### SPECIFICATIONS

Driver mounted on B&C ME7 horn

|  |                        |
|--|------------------------|
| Throat Diameter  | <b>19 mm (0.75 in)</b> |
| Nominal Impedance  | <b>4 Ω</b>             |
| Minimum Impedance  | <b>4.7 Ω</b>           |
| Nominal Power Handling   | <b>10 W</b>            |
| 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. |                        |
| Continuous Power Handling  | <b>20 W</b>            |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating.  |                        |
| Sensitivity  | <b>107 dB</b>          |
| Applied RMS Voltage is set to 2 V for 4 ohms Nominal Impedance.  |                        |
| Frequency Range  | <b>2 kHz - 18 kHz</b>  |
| Recommended Crossover  | <b>2.5 kHz</b>         |
| 12 dB/oct. or higher slope high-pass filter.   |                        |
| Voice Coil Diameter  | <b>25 mm (1 in)</b>    |
| Winding Material   | <b>Aluminium</b>       |
| Inductance   | <b>0.15 mH</b>         |
| Flux Density   | <b>1.65 T</b>          |
| Diaphragm Material   | <b>Mylar</b>           |

- 20 W continuous program power capacity
- 25 mm (1 in) aluminium voice coil
- 3/4" horn throat diameter
- Polyester diaphragm
- 2000 - 18000 Hz response
- 107 dB sensitivity

Available exclusively with 4.8+2.8 mm fast-on terminal tab

### MOUNTING AND SHIPPING INFO

Two M4 holes 180° on 53 mm (2.1 in) diameter



|                  |  |
|------------------|--|
| Overall Diameter | <b>62 mm (2.44 in)</b>                           |
| Depth            | <b>35 mm (1.37 in)</b>                           |
| Net Weight       | <b>0.17 kg (0.37 lb)</b>                         |
| Shipping Units   | <b>1 pcs</b>                                     |
| Shipping Weight  | <b>0.18 kg (0.4 lb)</b>                          |
| Shipping Box     | <b>65x55x40 mm</b><br><b>(2.56x2.17x1.57 in)</b> |

### SERVICE KITS

|                          |                |
|--------------------------|----------------|
| HF replacement-diaphragm | <b>MMDDE74</b> |
|--------------------------|----------------|



## DE7 4 Ω

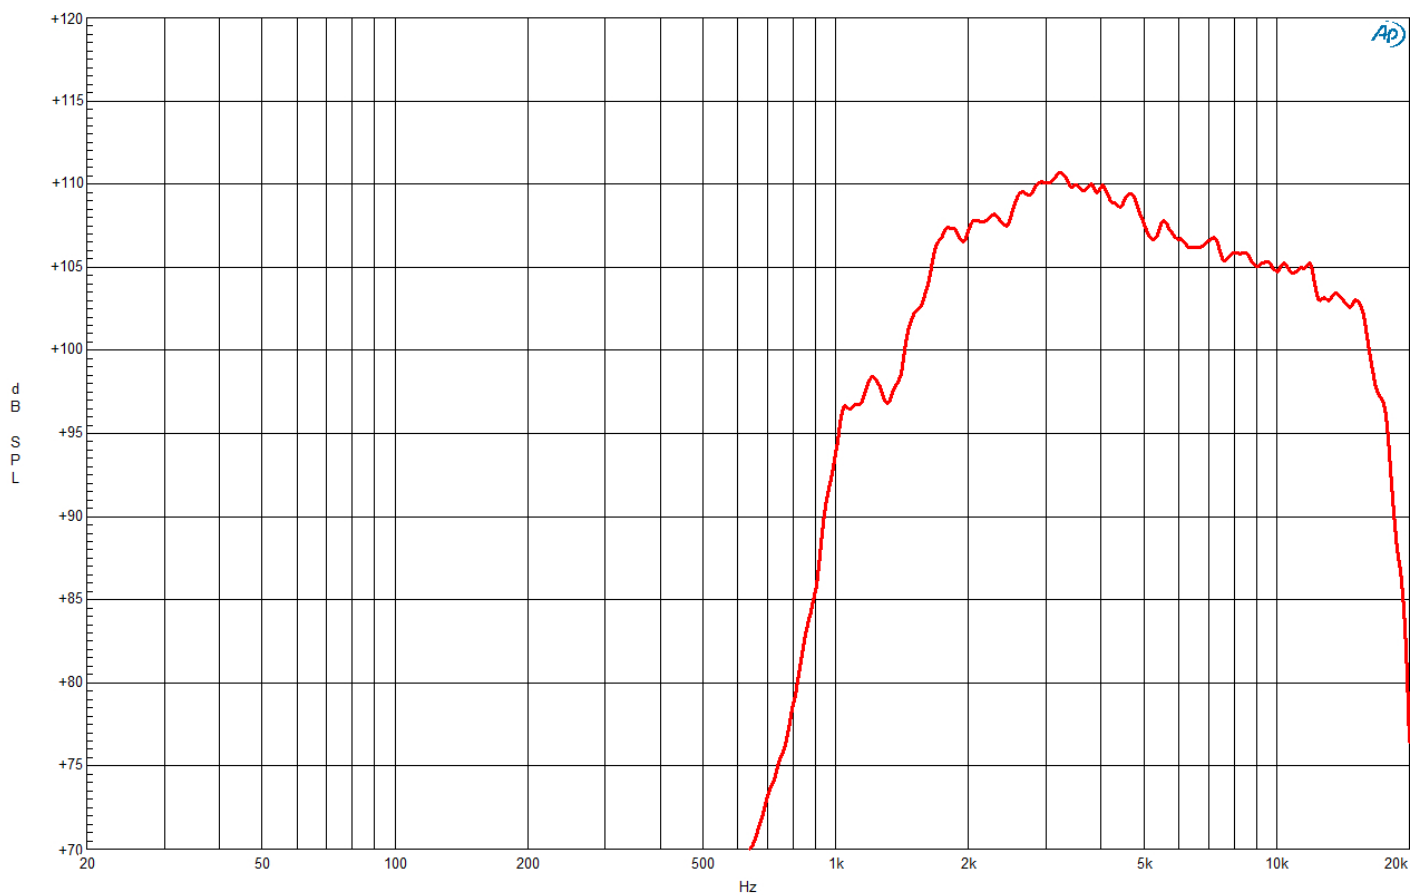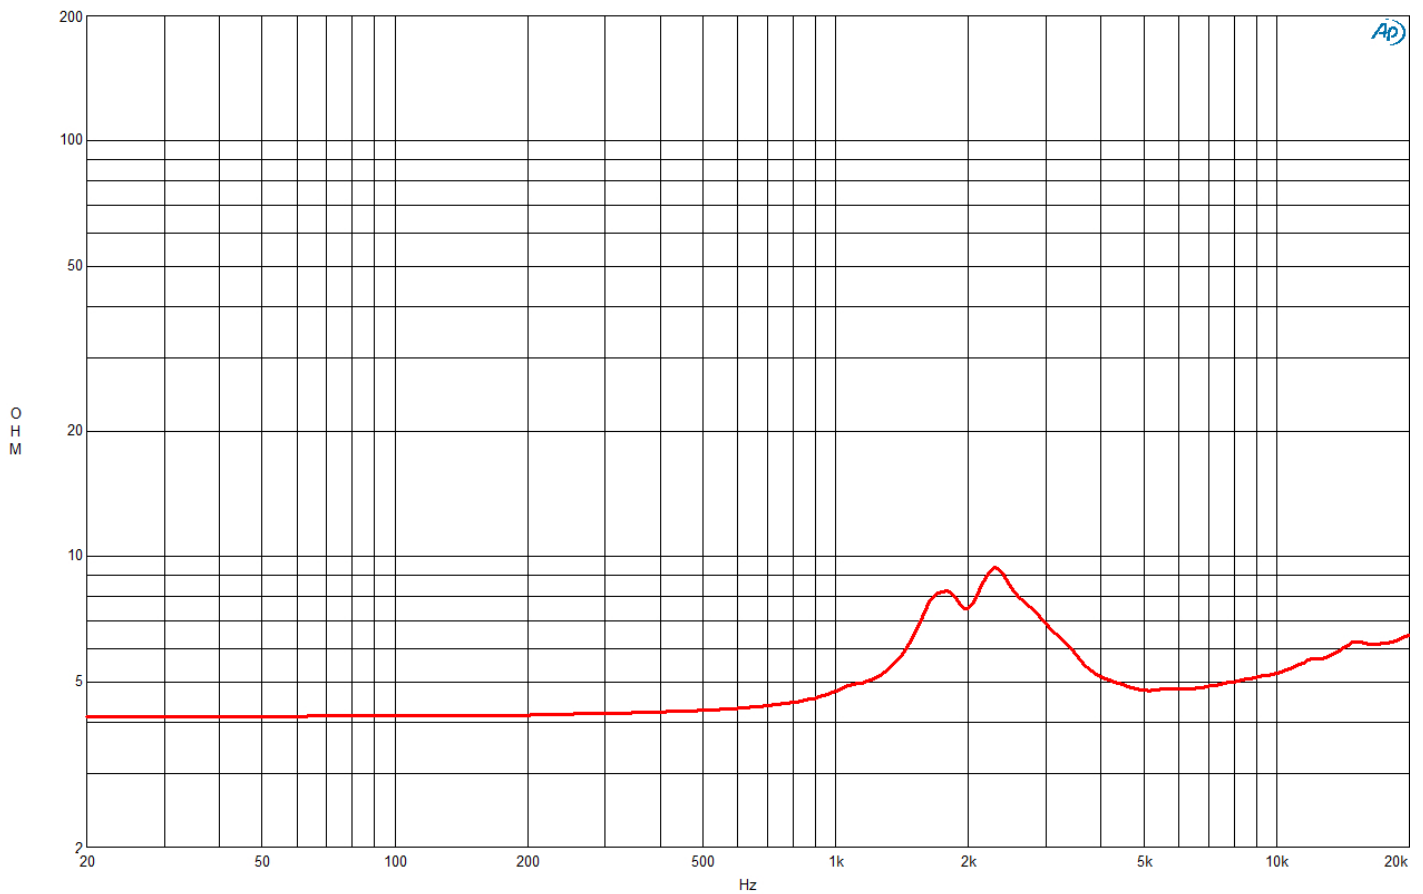

## DE7 4 Ω

