

10NSM76 16 Ω

Sealed Midrange

- 800 W continuous program power capacity
- 76 mm (3 in) aluminium voice coil
- 235 - 3500 Hz response
- 99 dB sensitivity
- Ideal for Direct Radiation and Horn Loaded Midrange application

For simplified cabinet assembly and efficient thermal transfer to the air, our NSM series of sealed back midranges feature a cast aluminum sealed chassis, high strength neodymium motor, and large internal volume for good low frequency performance. Large voice coils provide power handling, while careful selection of suspension and cone components results in exceptional sensitivity. These dedicated narrow-bandwidth midranges offer the lowest distortion at given output of any midrange available.

Available exclusively with 6.3+4.8 mm fast-on terminal tab



10NSM76 16 Ω

Sealed Midrange

SPECIFICATIONS

Nominal Diameter	250 mm (10 in)
Nominal Impedance	16 Ω
Minimum Impedance	14 Ω
Nominal Power Handling	400 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	800 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	99 dB
Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.	
Frequency Range	235 Hz - 3500 Hz
Voice Coil Diameter	76 mm (3 in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	11.5 mm (0.45 in)
Magnetic Gap Depth	9 mm (0.35 in)
Flux Density	1.6 T
Woofer Cone Treatment	WP Waterproof Front Side

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	235 Hz
Re	10.7 Ω
Qes	0.72
Qms	8.7
Qts	0.66
Vas	2 dm³ (0.07 ft³)
Sd	320 cm² (49.6 in²)
η0	3.5 %
Xmax	3.5 mm
Xvar	3.5 mm
Mms	33 g
Bl	21.5 Tm
Le	1.5 mH
EBP	326 Hz

DESIGN



Surround Shape	Accordion
Cone Shape	Radial
Magnet Material	Neodymium Ring
Spider	Single
Pole Design	T-Pole
Woofer Cone Treatment	WP Waterproof Front Side

MOUNTING AND SHIPPING INFO

Overall Diameter	291 mm (11.46 in)
Bolt Circle Diameter	274 mm (10.79 in)
Baffle Cutout Diameter	234 mm (9.21 in)
Depth	130 mm (5.12 in)
Flange and Gasket Thickness	12 mm (0.47 in)
Air Volume Occupied by Driver	5 dm³ (0.18 ft³)
Net Weight	4.55 kg (10.03 lb)
Shipping Units	1 pcs
Shipping Weight	5.45 kg (12.02 lb)
Shipping Box	360x360x200 mm (14.17x14.17x7.87 in)

SERVICE KITS

LF recone-kits	RCK010NSM7616
----------------	----------------------

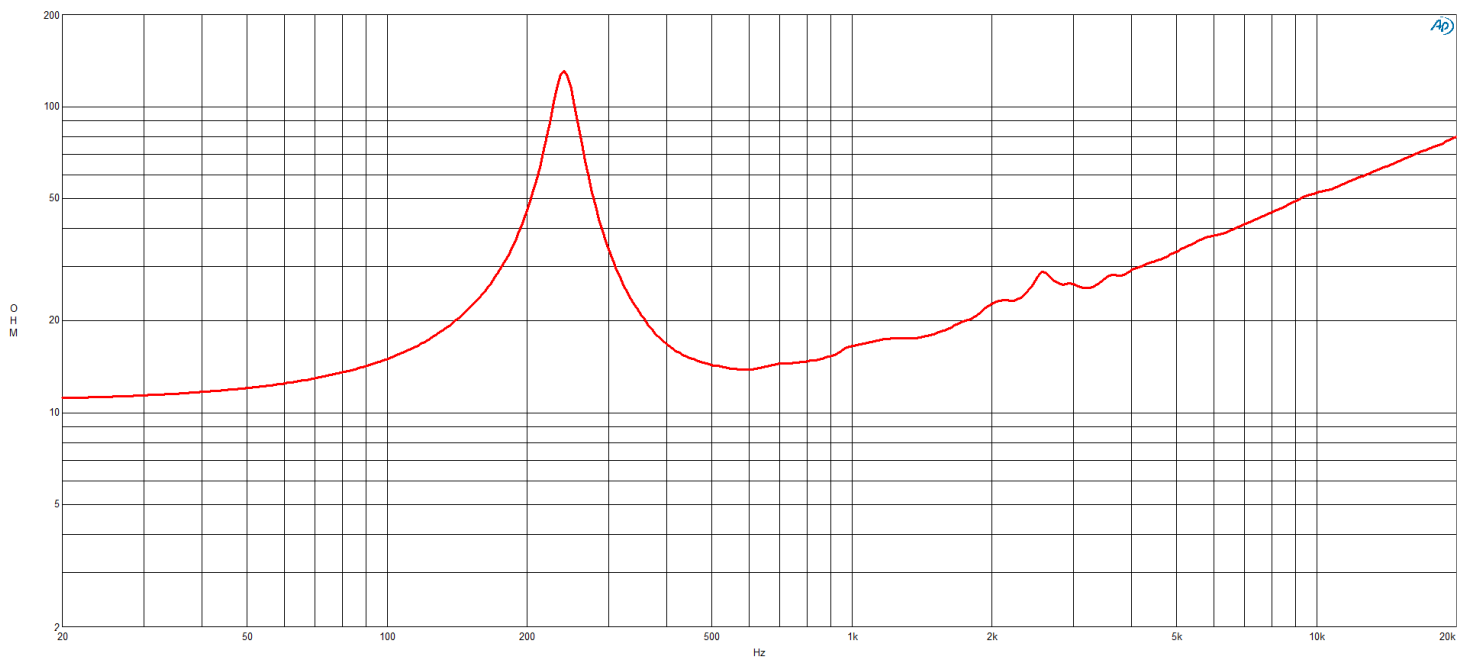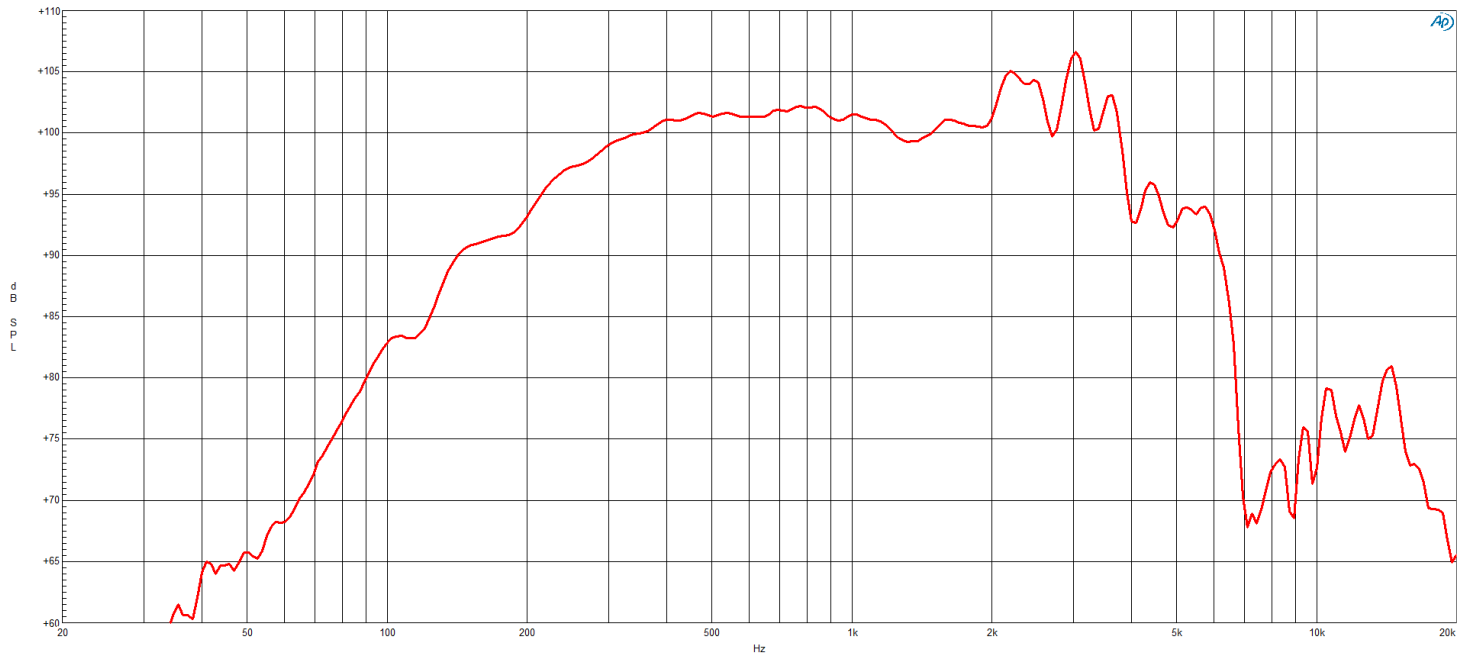

LF Drivers

Ø 10 inches

10NSM76 16 Ω

Sealed Midrange

