

## LF Drivers

Ø 12 inches

**12NW100** 4 Ω

Subwoofer

- 2000 W continuous program power capacity
- 100 mm (4 in) copper voice coil
- 45 - 1500 Hz response
- 92 dB sensitivity
- Excursion optimized lead wires (woven through spider)
- FEA optimized Neodymium magnet assembly
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression



### SPECIFICATIONS

Nominal Diameter	<b>320 mm (12 in)</b>
Nominal Impedance	<b>4 Ω</b>
Minimum Impedance	<b>5 Ω</b>
Nominal Power Handling	<b>1000 W</b>
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	<b>2000 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>92 dB</b>
Applied RMS Voltage is set to 2V for 4 ohms Nominal Impedance.	
Frequency Range	<b>45 Hz - 1500 Hz</b>
Voice Coil Diameter	<b>100 mm (4 in)</b>
Winding Material	<b>Copper</b>
Former Material	<b>Glass Fibre</b>
Winding Depth	<b>25 mm (1 in)</b>
Magnetic Gap Depth	<b>12 mm (0.5 in)</b>
Flux Density	<b>1.2 T</b>
Woofer Cone Treatment	<b>TWP Waterproof Both Sides</b>

### PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	<b>44 Hz</b>
Re	<b>3.8 Ω</b>
Qes	<b>0.21</b>
Qms	<b>5.8</b>
Qts	<b>0.2</b>
Vas	<b>43.3 dm<sup>3</sup> (1.53 ft<sup>3</sup>)</b>
Sd	<b>531 cm<sup>2</sup> (82.3 in<sup>2</sup>)</b>
η0	<b>1.69 %</b>
Xmax	<b>9 mm</b>
Xvar	<b>10 mm</b>
Mms	<b>120 g</b>
Bl	<b>24.38 Tm</b>
Le	<b>1.79 mH</b>
EBP	<b>210 Hz</b>

### DESIGN

Surround Shape	<b>Triple Roll</b>
Cone Shape	<b>Radial</b>
Magnet Material	<b>Neodymium Inside Slug</b>
Spider	<b>Double Silicone</b>
Pole Design	<b>T-Pole</b>
Woofer Cone Treatment	<b>TWP Waterproof Both Sides</b>
Recommended Enclosure	<b>50 dm<sup>3</sup> (1.77 ft<sup>3</sup>)</b>
Recommended Tuning	<b>50 Hz</b>

### MOUNTING AND SHIPPING INFO

Overall Diameter	<b>319 mm (12.5 in)</b>
Bolt Circle Diameter	<b>299 mm (11.8 in)</b>
Baffle Cutout Diameter	<b>281 mm (11.1 in)</b>
Depth	<b>137 mm (5.4 in)</b>
Flange and Gasket Thickness	<b>13 mm (0.5 in)</b>
Air Volume Occupied by Driver	<b>2.7 dm<sup>3</sup> (0.09 ft<sup>3</sup>)</b>
Net Weight	<b>8.2 kg (18 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>9.1 kg (20.06 lb)</b>
Shipping Box	<b>360x360x200 mm (14.17x14.17x7.87 in)</b>

### SERVICE KITS



LF recone-kits	<b>RCK12NW1004</b>
----------------	--------------------


# LF Drivers

Ø 12 inches

**12NW100** 4 Ω

Subwoofer

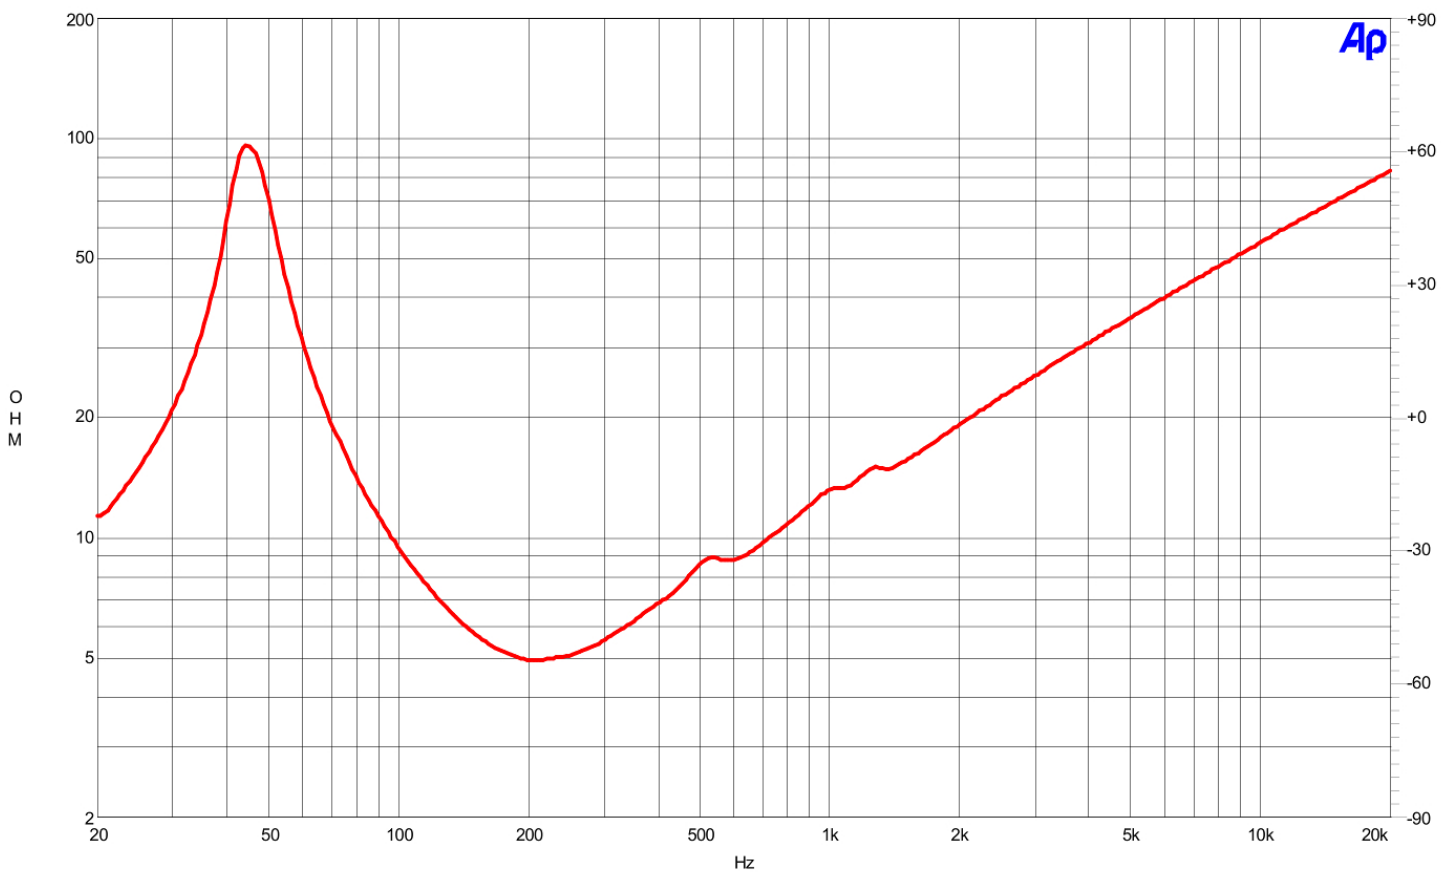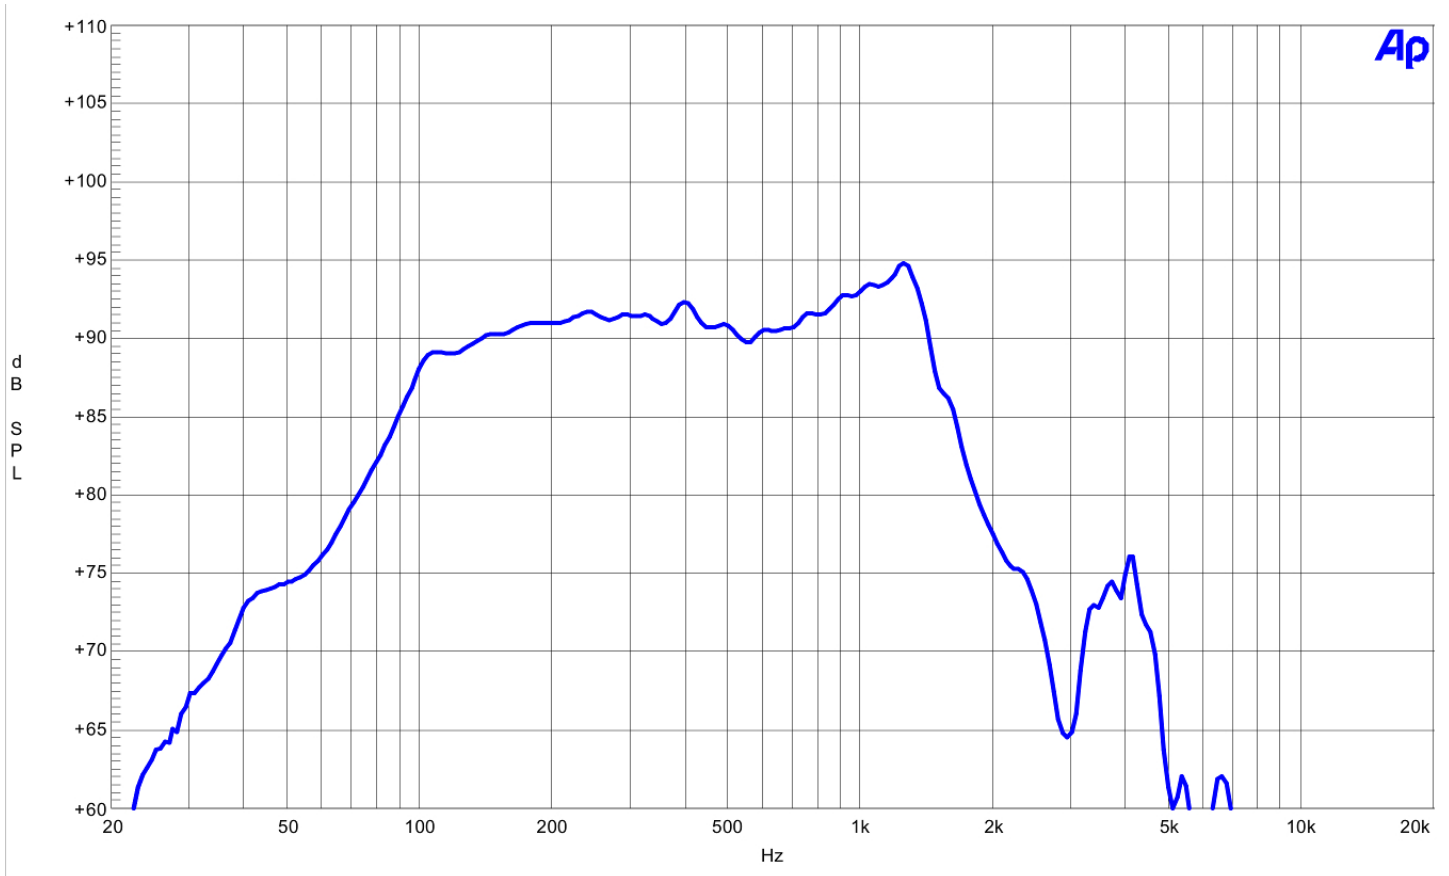

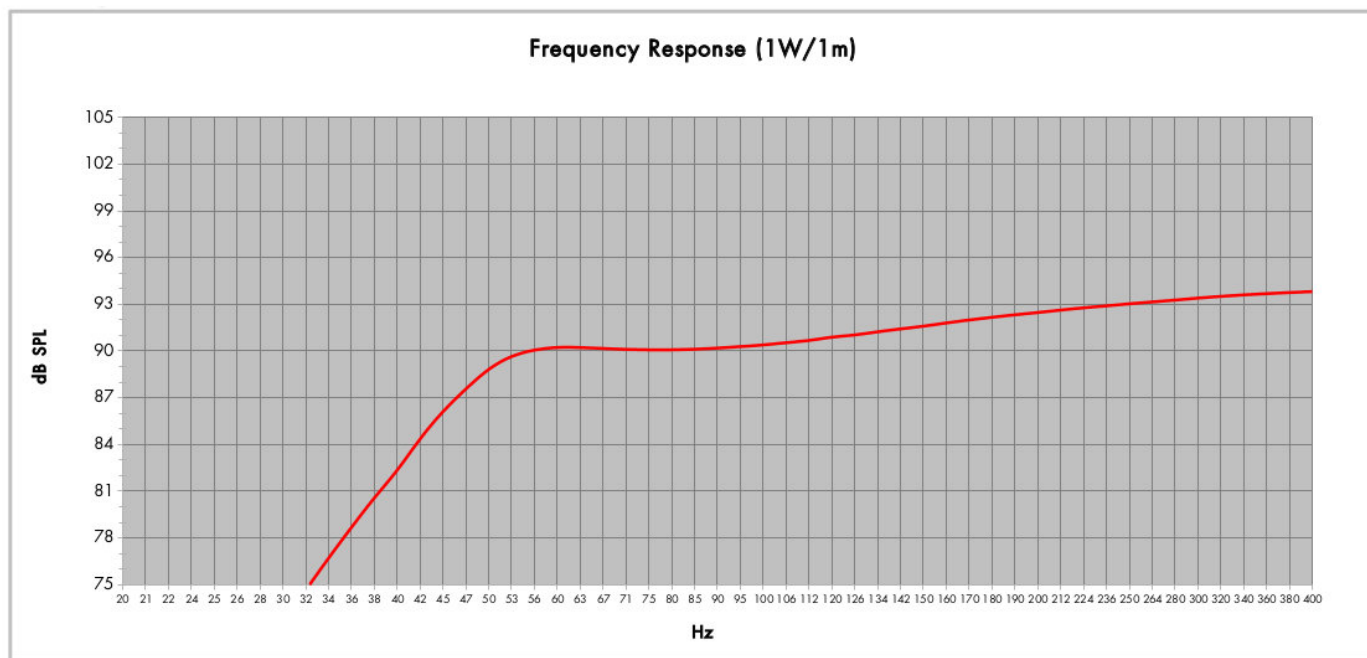

Model:	<b>12NW100</b>	Configuration:	<b>One Driver</b>
Enclosure Type:	<b>Bass Reflex</b>		
Internal Net Volume (Litres):	<b>50</b>	QB:	<b>3</b>
Tuning Frequency (Hz):	<b>50</b>	Port Area (cm <sup>2</sup> ):	<b>208,1</b>
Frequency (-3 dB) (Hz):	<b>143,8</b>	Port Length (cm):	<b>35,9</b>