

LF Drivers

Ø 15 inches

15TBW100 4 Ω

Subwoofer

- 3000 W continuous program power capacity
- 100 mm (4 in) split winding copper voice coil
- 40 - 1500 Hz response
- 95 dB sensitivity
- Excursion optimized lead wires (woven through spider)
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression
- Aluminium demodulating ring for very low distortion



15TBW100 4 Ω

Subwoofer

SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Nominal Impedance	4 Ω
Minimum Impedance	4.2 Ω
Nominal Power Handling	1500 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	3000 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	95 dB
Applied RMS Voltage is set to 2V for 4 ohms Nominal Impedance.	
Frequency Range	40 Hz - 1500 Hz
Voice Coil Diameter	100 mm (4 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	31 mm (1.22 in)
Magnetic Gap Depth	15 mm (0.59 in)
Flux Density	1.15 T
Woofer Cone Treatment	TWP Waterproof Both Sides

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	39 Hz
Re	3.2 Ω
Qes	0.3
Qms	5.55
Qts	0.28
Vas	88 dm³ (3.11 ft³)
Sd	855 cm² (132.5 in²)
η0	1.64 %
Xmax	12 mm
Xvar	13.5 mm
Mms	197 g
Bl	22.56 Tm
Le	1.64 mH
EBP	130 Hz

DESIGN

Surround Shape	Triple Roll
Cone Shape	Radial
Magnet Material	Ferrite
Spider	Double Silicone
Pole Design	T-Pole
Woofer Cone Treatment	TWP Waterproof Both Sides
Recommended Enclosure	95 dm³ (3.35 ft³)
Recommended Tuning	40 Hz

MOUNTING AND SHIPPING INFO

Overall Diameter	393 mm (15.5 in)
Bolt Circle Diameter	374 mm (14.7 in)
Baffle Cutout Diameter	354 mm (13.9 in)
Depth	191 mm (7.52 in)
Flange and Gasket Thickness	14 mm (0.55 in)
Air Volume Occupied by Driver	6 dm³ (0.21 ft³)
Net Weight	12.2 kg (26.9 lb)
Shipping Units	1 pcs
Shipping Weight	13.5 kg (29.76 lb)
Shipping Box	425x425x224 mm (16.73x16.73x8.82 in)

SERVICE KITS



LF recone-kits	RCK15TBW1004
----------------	---------------------

LF Drivers

Ø 15 inches


15TBW100 4 Ω

Subwoofer

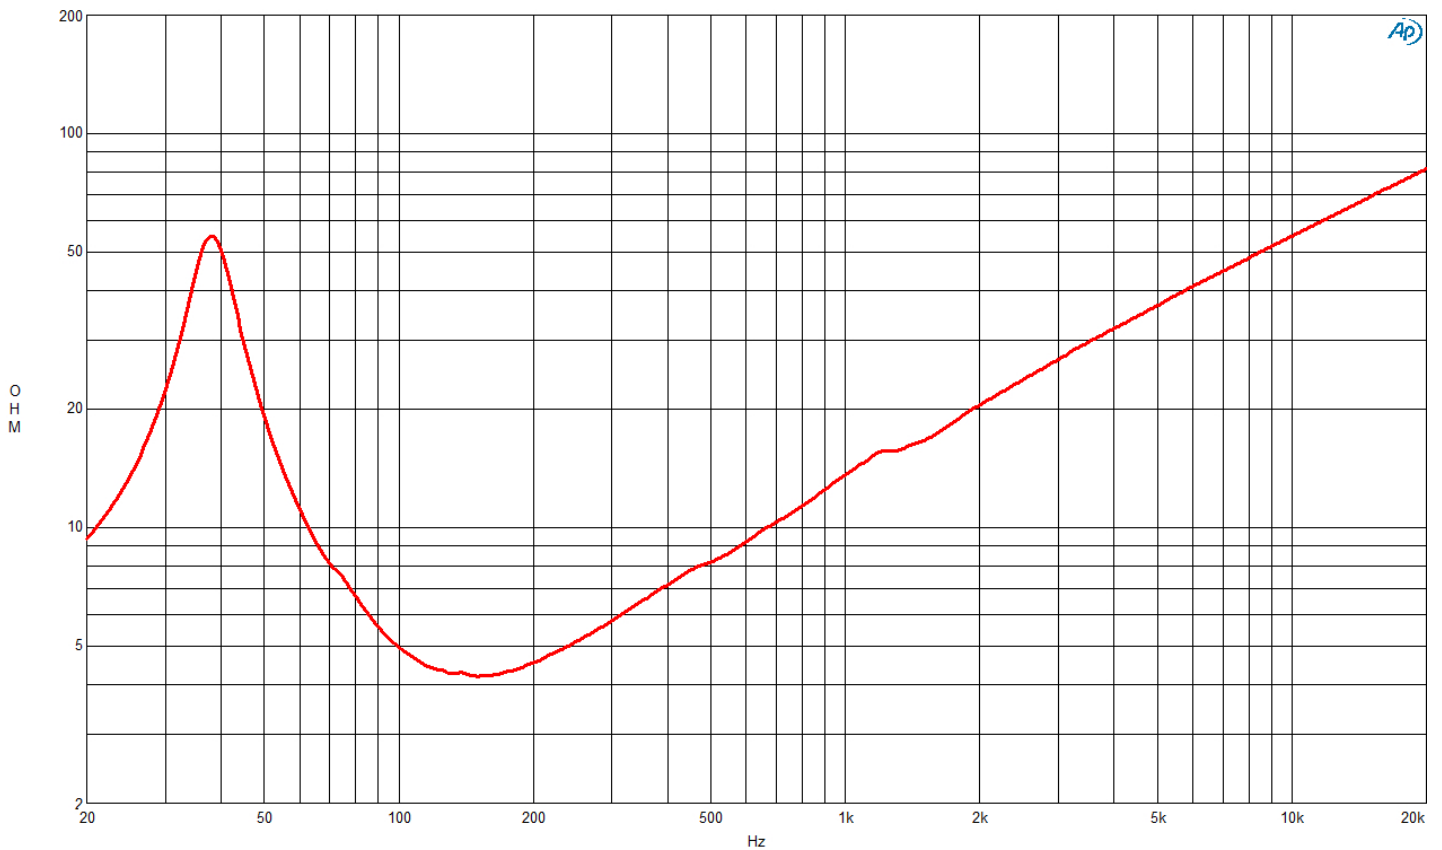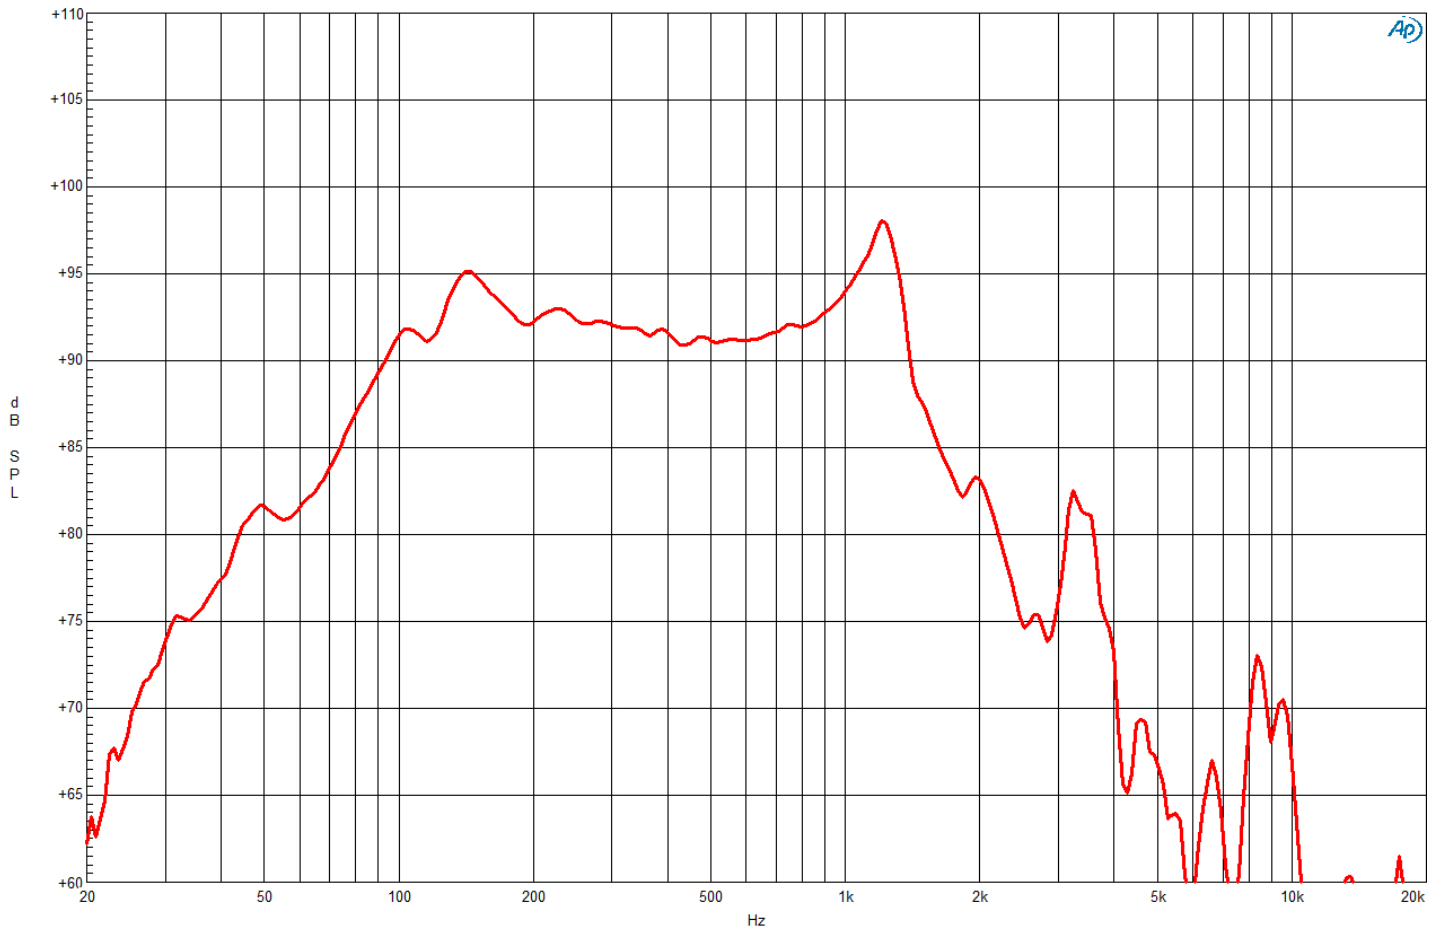

Professional loudspeaker transducers since 1946

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

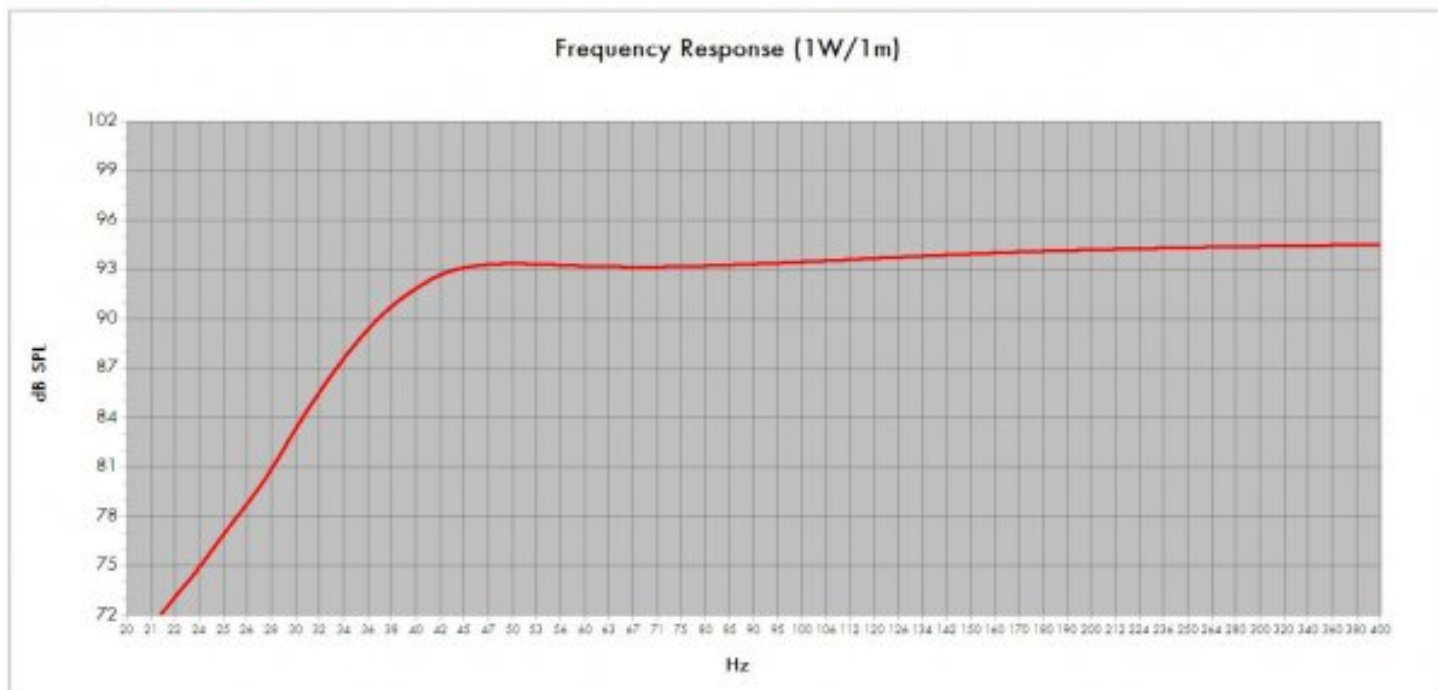

Model:	15TBW100	Configuration:	One Driver
Enclosure Type:	Bass Reflex	QB:	7
Internal Net Volume [Litres]:	95	Port Area [cm ²]:	277,5
Tuning Frequency [Hz]:	40	Port Length [cm]:	38,6
Frequency [-3 dB] [Hz]:	39,6		
Excursion Limited Maximum SPL at 1 meter [dB]:	122,7	equal to	773,2 Watts [Bass Band Power Rating]
Thermal Limited Maximum SPL at 1 meter [dB]:	126,3	equal to	1500,0 Watts [Mid Band Power Rating]

LF Drivers

Ø 15 inches

15TBW100 4 Ω

Subwoofer

