

LF Drivers

Ø 12 inches

320K/C-A 16 Ω

Full-range

- 240 W continuous program power capacity
- 38 mm (1.5 in) copper voice coil
- 80 - 16000 Hz response
- 100 dB sensitivity
- Shorting copper cap for extended HF response



SPECIFICATIONS

Nominal Diameter	320 mm (12 in)
Nominal Impedance	16 Ω
Minimum Impedance	13.6 Ω
Nominal Power Handling	120 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	240 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	100 dB
Applied RMS Voltage is set to 4V for 16 ohm Nominal Impedance	
Frequency Range	80 Hz - 16000 Hz
Voice Coil Diameter	38 mm (1.5 in)
Winding Material	Copper
Former Material	Kraft Paper
Winding Depth	9 mm (0.37 in)
Magnetic Gap Depth	9 mm (0.35 in)
Flux Density	1.4 T
Woofer Cone Treatment	None

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	82 Hz
Re	12 Ω
Qes	0.61
Qms	14
Qts	0.59
Vas	52 dm³ (1.84 ft³)
Sd	522 cm² (80.91 in²)
η0	4.4 %
Xmax	2 mm
Mms	28 g
Bl	16.8 Tm
Le	2.2 mH
EBP	134 Hz

DESIGN

Surround Shape	Accordion
Cone Shape	Radial
Magnet Material	Ferrite
Spider	Single
Pole Design	Straight Pole
Woofer Cone Treatment	None
Recommended Enclosure	60 dm³ (2.12 ft³)
Recommended Tuning	75 Hz

MOUNTING AND SHIPPING INFO

Overall Diameter	316 mm (12.44 in)
Bolt Circle Diameter	298 mm (11.73 in)
Baffle Cutout Diameter	286 mm (11.26 in)
Depth	136 mm (5.35 in)
Flange and Gasket Thickness	12 mm (0.47 in)
Air Volume Occupied by Driver	3 dm³ (0.11 ft³)
Net Weight	4.6 kg (10.14 lb)
Shipping Units	1 pcs
Shipping Weight	5.5 kg (12.13 lb)
Shipping Box	360x360x200 mm (14.17x14.17x7.87 in)

SERVICE KITS



LF recone-kits	RCK320KC16A
----------------	--------------------

LF Drivers

Ø 12 inches


320K/C-A 16 Ω

Full-range

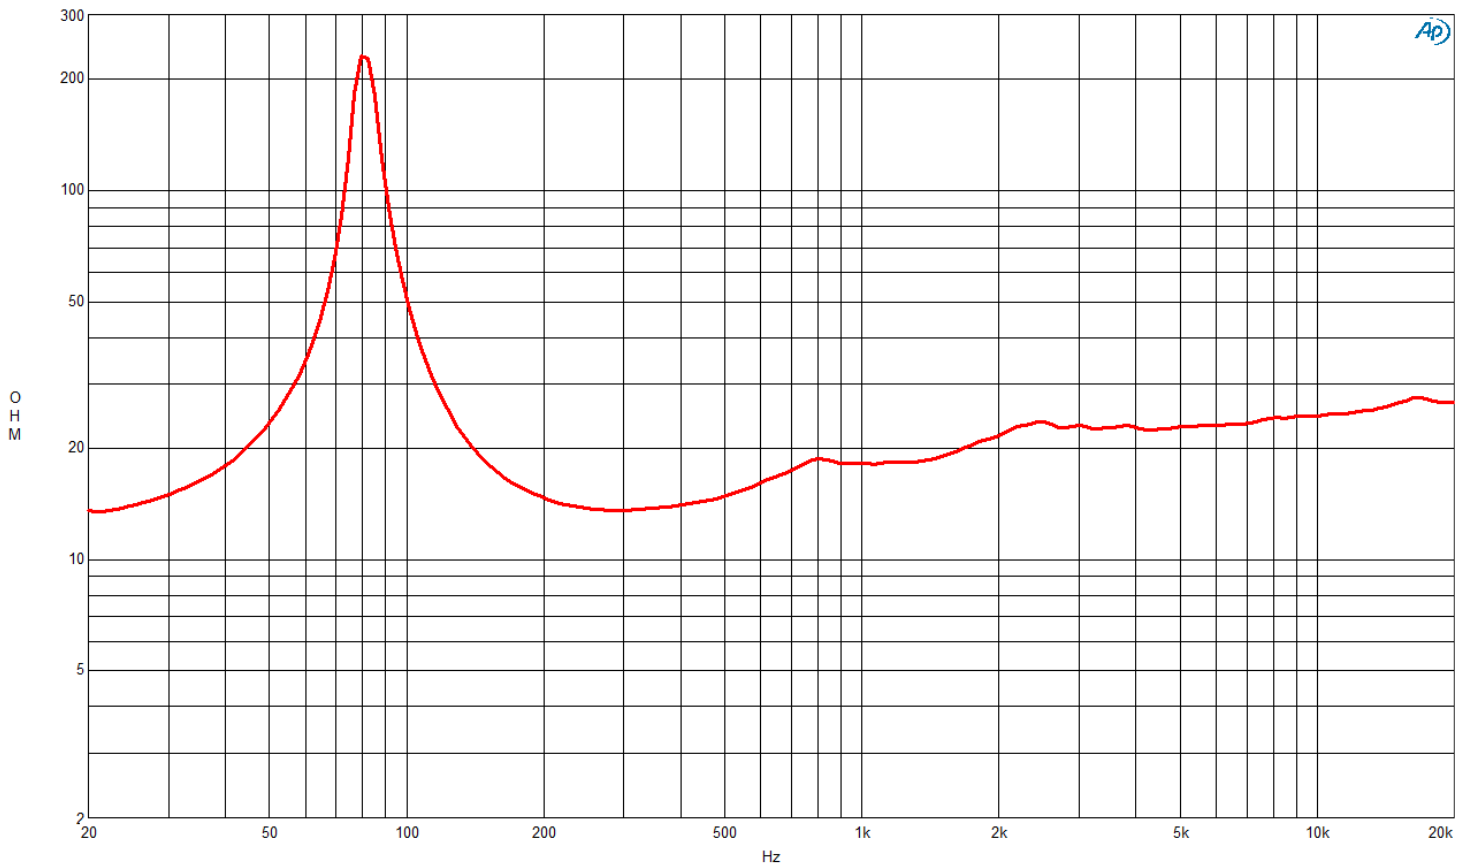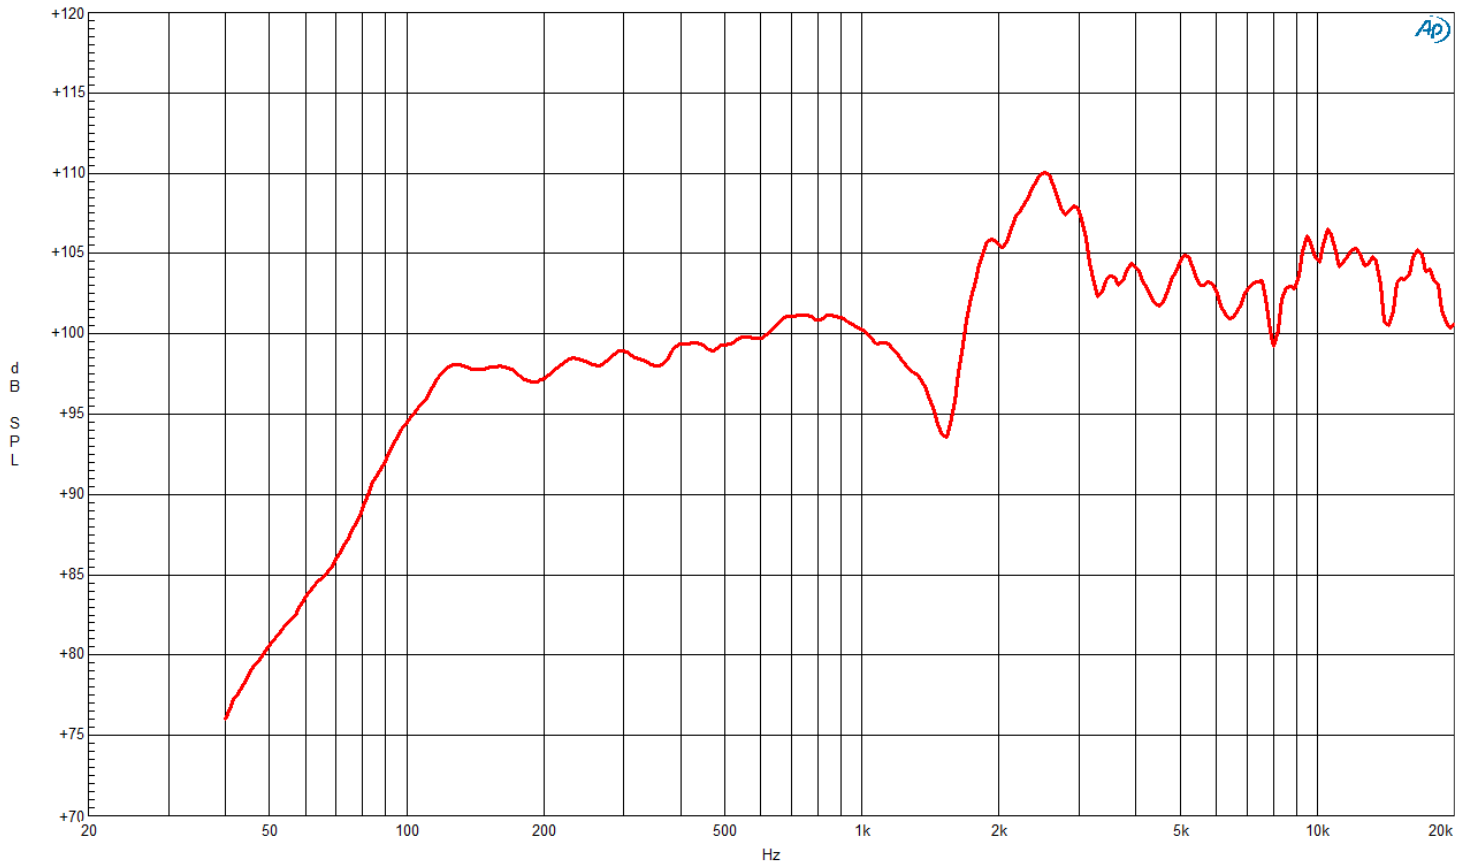

Professional loudspeaker transducers since 1946

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

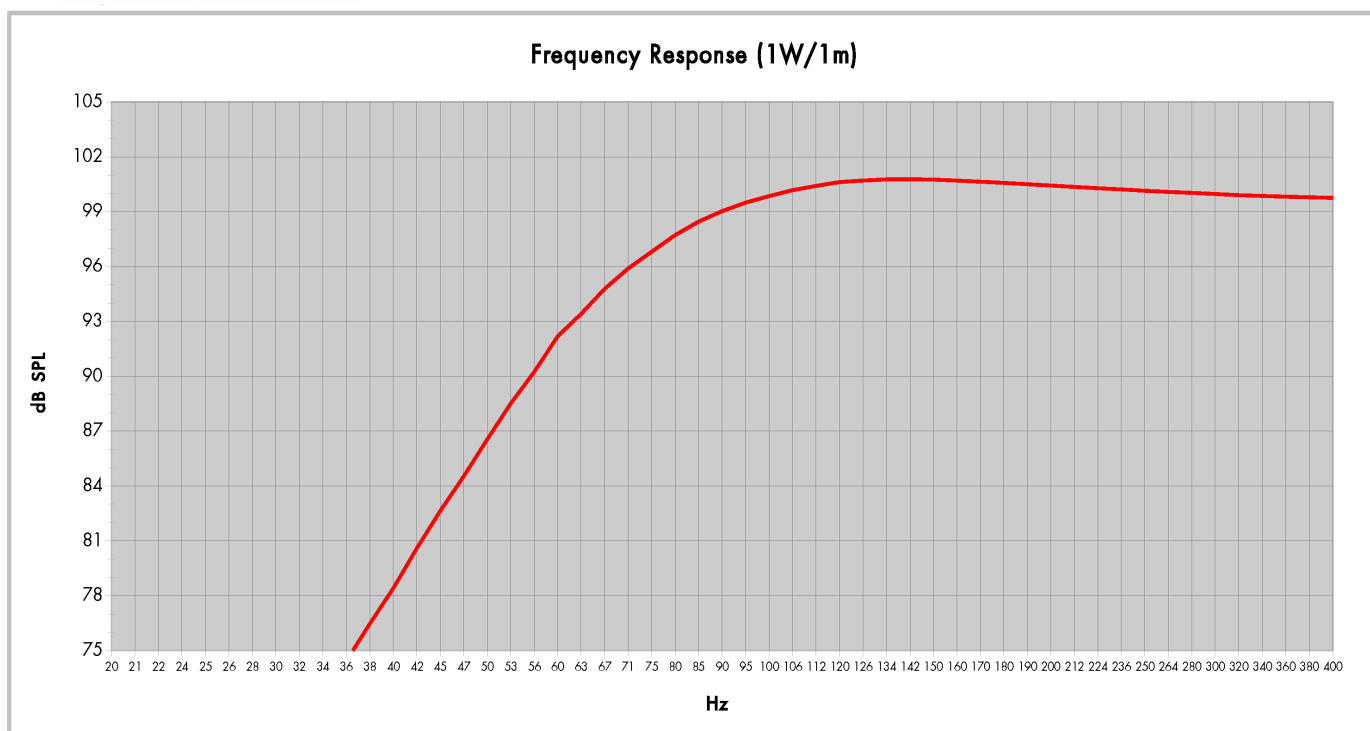

Model:	320K/CA	Configuration:	One Driver
Enclosure Type:	Bass Reflex	QB:	7
Internal Net Volume (Litres):	60	Port Area (cm ²):	165,0
Tuning Frequency (Hz):	75	Port Length (cm):	1,9
Frequency (-3 dB) (Hz):	73,5		
Frequency (-10 dB) (Hz):	54,7		

LF Drivers

Ø 12 inches

320K/C-A 16 Ω

Full-range

