

6MBX44 8 Ω

Mid-Bass

- 400 W continuous program power capacity
- 44 mm (1.7 in) aluminium voice coil
- 115 - 5000 Hz response
- 98 dB sensitivity
- Neodymium magnet allows a very light yet powerful motor assembly
- Aluminium ring allows a very low distortion figure

The MBX series mid-bass woofers from B&C Speakers offer acoustic designers a new range of high efficiency, wide bandwidth alternatives that are not currently available in the B&C range. These full-featured transducers incorporate lightweight neodymium motors, inside/outside wound copper clad aluminum wire voice coils, weatherproof impregnated paper cones, and a symmetrical inductance profile. The MBX Series is especially well suited for two-way loudspeaker enclosures.



SPECIFICATIONS

Nominal Diameter	170 mm (6.5 in)
Nominal Impedance	8 Ω
Minimum Impedance	6 Ω
Nominal Power Handling	200 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	400 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	98 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	115 Hz - 5000 Hz
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	10 mm (0.37 in)
Magnetic Gap Depth	6 mm (0.25 in)
Flux Density	1.55 T
Woofer Cone Treatment	Waterproof Impregnated Cone

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	113 Hz
Re	5.4 Ω
Qes	0.34
Qms	3.9
Qts	0.31
Vas	4.1 dm³ (0.14 ft³)
Sd	132 cm² (20.46 in²)
η0	1.4 %
Xmax	3.5 mm
Xvar	3 mm
Mms	12 g
Bl	11.7 Tm
Le	0.2 mH
EBP	332 Hz

DESIGN

Surround Shape	Triple Roll
Cone Shape	Exponential
Magnet Material	Neodymium Ring
Spider	Single
Pole Design	T-Pole
Woofer Cone Treatment	Waterproof Impregnated Cone
Recommended Enclosure	3 dm³ (0.11 ft³)
Recommended Tuning	120 Hz

MOUNTING AND SHIPPING INFO

Overall Diameter	187 mm (7.36 in)
Bolt Circle Diameter	172 mm (6.7 in)
Baffle Cutout Diameter	145 mm (5.7 in)
Depth	87 mm (3.43 in)
Flange and Gasket Thickness	11 mm (0.4 in)
Air Volume Occupied by Driver	0.6 dm³ (0.02 ft³)
Net Weight	1.59 kg (3.51 lb)
Shipping Units	1 pcs
Shipping Weight	1.79 kg (3.95 lb)
Shipping Box	210x210x125 mm (8.27x8.27x4.92 in)

SERVICE KITS



LF recone-kits	RCK06MBX448
----------------	--------------------

LF Drivers

Ø 6.5 inches


6MBX44 8 Ω

Mid-Bass

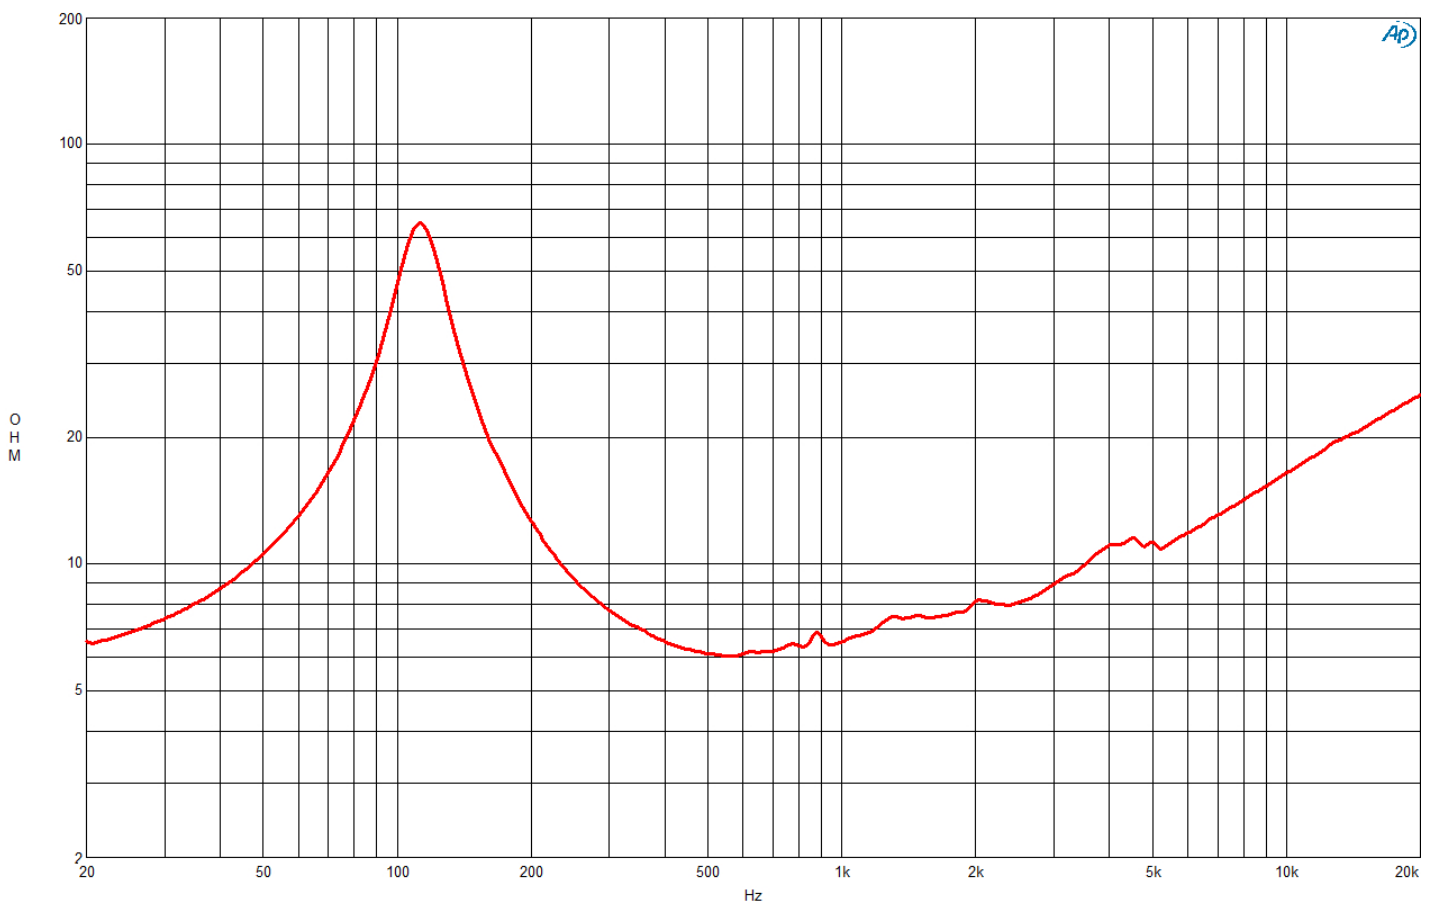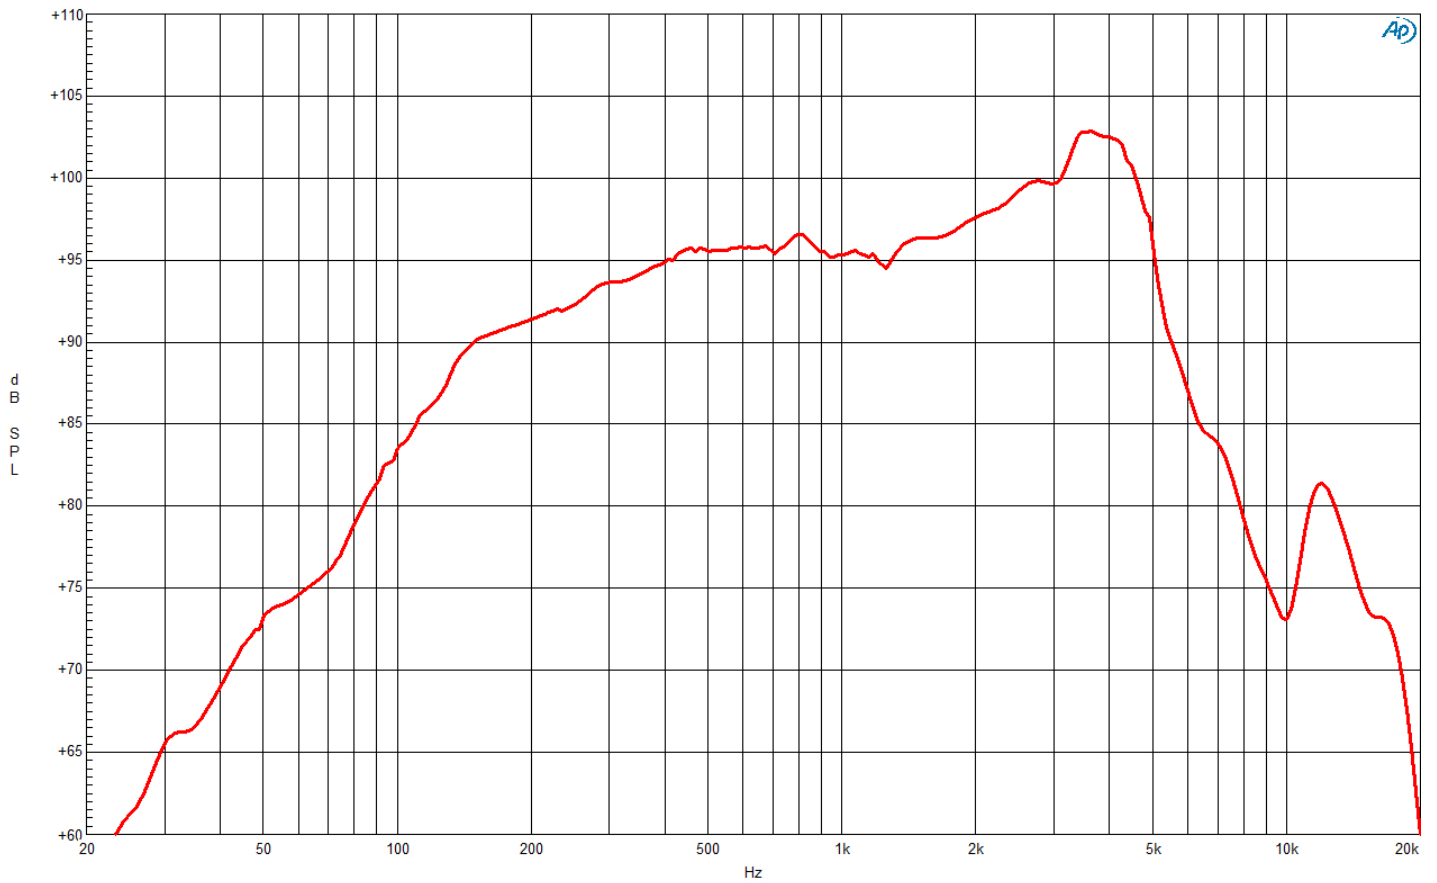

Professional loudspeaker transducers since 1946

B&C Speakers S.p.A. Via Poggiomoro, 1 - Loc. Vallina, 50012 Bagno a Ripoli (FI) | ITALY
Tel. +39 055 65721 | Fax +39 055 6572312 | mail@bcspeakers.com

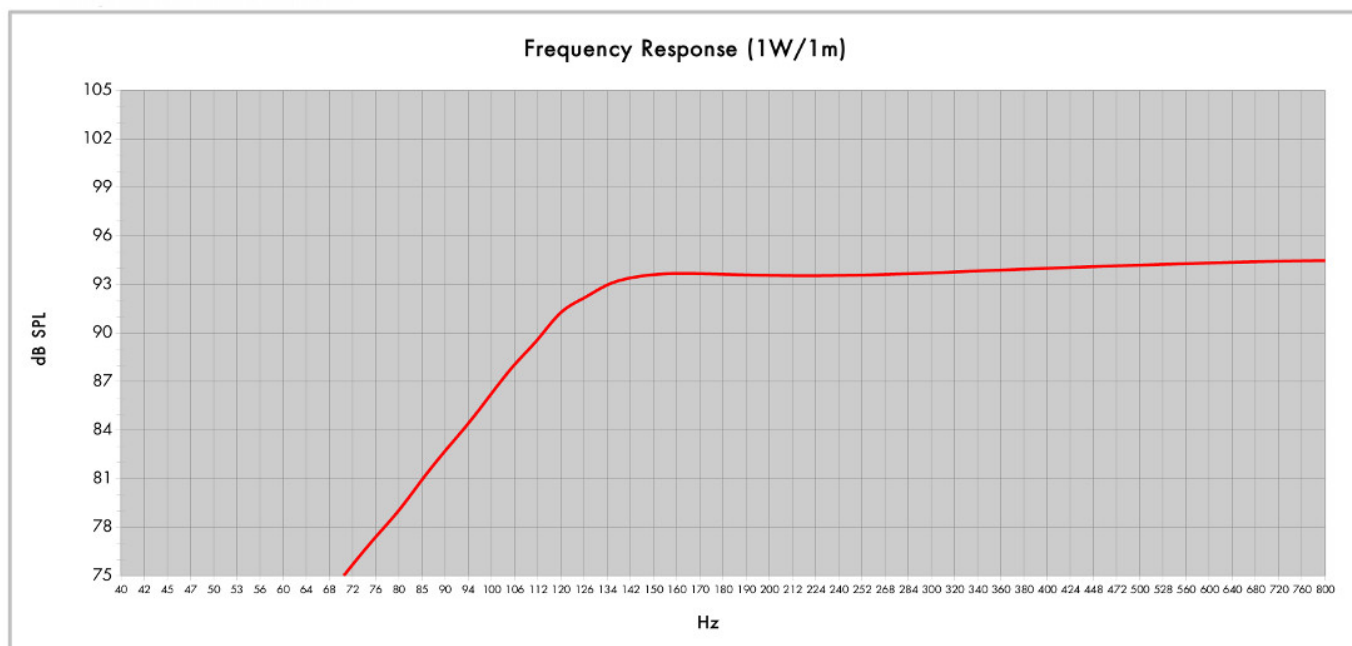

Model:	6MBX44	Configuration:	One Driver
Enclosure Type:	Bass Reflex		
Internal Net Volume (Litres):	3	QB:	7
Tuning Frequency (Hz):	120	Port Area (cm ²):	25,0
Frequency (-3 dB) (Hz):	123,0	Port Length (cm):	12,5
Frequency (-10 dB) (Hz):	95,3		

