

- 51 mm (2 in) copper voice coil
- 65 - 3000 Hz response
- 94 dB sensitivity
- Neodymium magnet allows a very light yet powerful motor assembly
- Shorting copper cap for extended HF response
- 400 W continuous program power capacity
- Ventilated voice coil gap for reduced power compression



## 8NDL51 8 Ω

Woofer

### SPECIFICATIONS

Nominal Diameter	<b>200 mm (8 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>6.6 Ω</b>
Nominal Power Handling	<b>200 W</b>
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	<b>400 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>94 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>65 Hz - 3000 Hz</b>
Voice Coil Diameter	<b>51 mm (2 in)</b>
Winding Material	<b>Copper</b>
Former Material	<b>Glass Fibre</b>
Winding Depth	<b>17 mm (0.65 in)</b>
Magnetic Gap Depth	<b>8 mm (0.31 in)</b>
Flux Density	<b>1.05 T</b>
Woofer Cone Treatment	<b>TWP Waterproof Both Sides</b>

### PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	<b>66 Hz</b>
Re	<b>5.3 Ω</b>
Qes	<b>0.41</b>
Qms	<b>3.6</b>
Qts	<b>0.37</b>
Vas	<b>14 dm<sup>3</sup> (0.5 ft<sup>3</sup>)</b>
Sd	<b>220 cm<sup>2</sup> (34.1 in<sup>2</sup>)</b>
η0	<b>1 %</b>
Xmax	<b>7 mm</b>
Xvar	<b>7 mm</b>
Mms	<b>28 g</b>
Bl	<b>12.4 Tm</b>
Le	<b>0.5 mH</b>
EBP	<b>161 Hz</b>

### DESIGN



Surround Shape	<b>Double Roll</b>
Cone Shape	<b>Exponential</b>
Magnet Material	<b>Neodymium Inside Slug</b>
Spider	<b>Single</b>
Pole Design	<b>Straight Pole</b>
Woofer Cone Treatment	<b>TWP Waterproof Both Sides</b>
Recommended Enclosure	<b>14 dm<sup>3</sup> (0.49 ft<sup>3</sup>)</b>
Recommended Tuning	<b>65 Hz</b>


### MOUNTING AND SHIPPING INFO

Overall Diameter	<b>225 mm (8.8 in)</b>
Bolt Circle Diameter	<b>210 mm (8.3 in)</b>
Baffle Cutout Diameter	<b>187 mm (7.4 in)</b>
Depth	<b>90 mm (3.5 in)</b>
Flange and Gasket Thickness	<b>11 mm (0.4 in)</b>
Air Volume Occupied by Driver	<b>1.1 dm<sup>3</sup> (0.04 ft<sup>3</sup>)</b>
Net Weight	<b>1.85 kg (4.08 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>2.3 kg (5.07 lb)</b>
Shipping Box	<b>255x255x150 mm (10.04x10.04x5.91 in)</b>

### SERVICE KITS

LF recone-kits	<b>RCK008NDL518</b>
----------------	---------------------

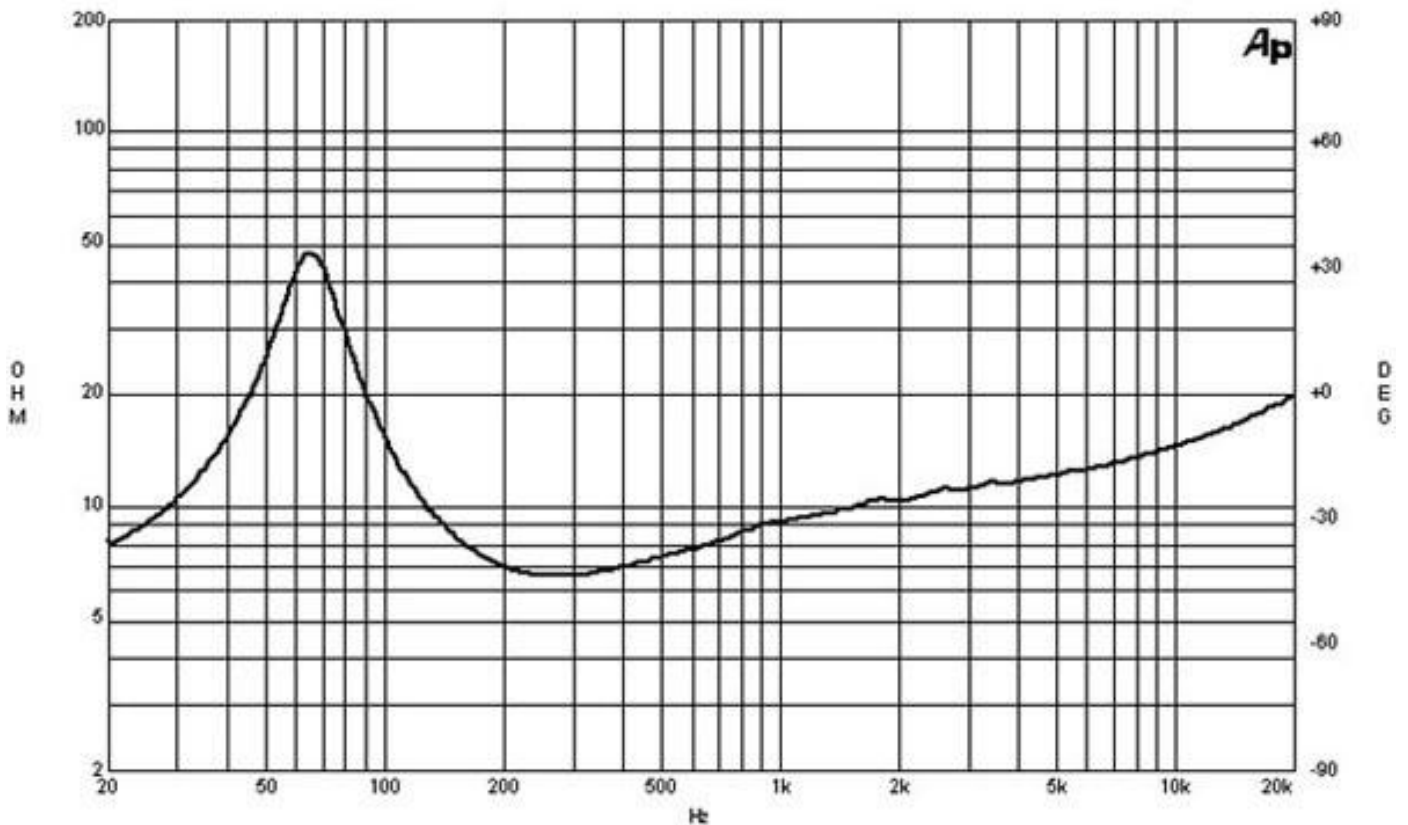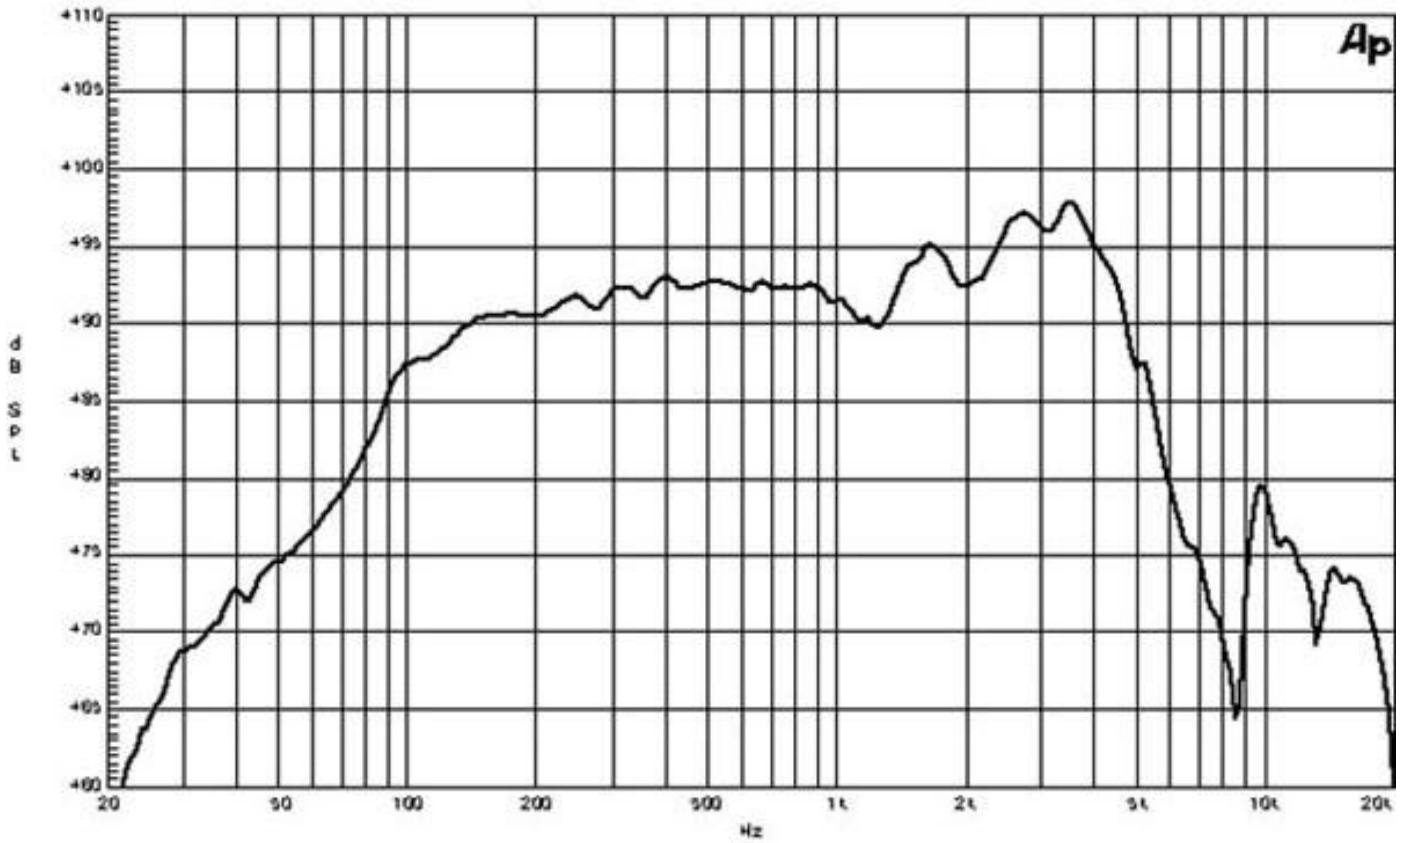

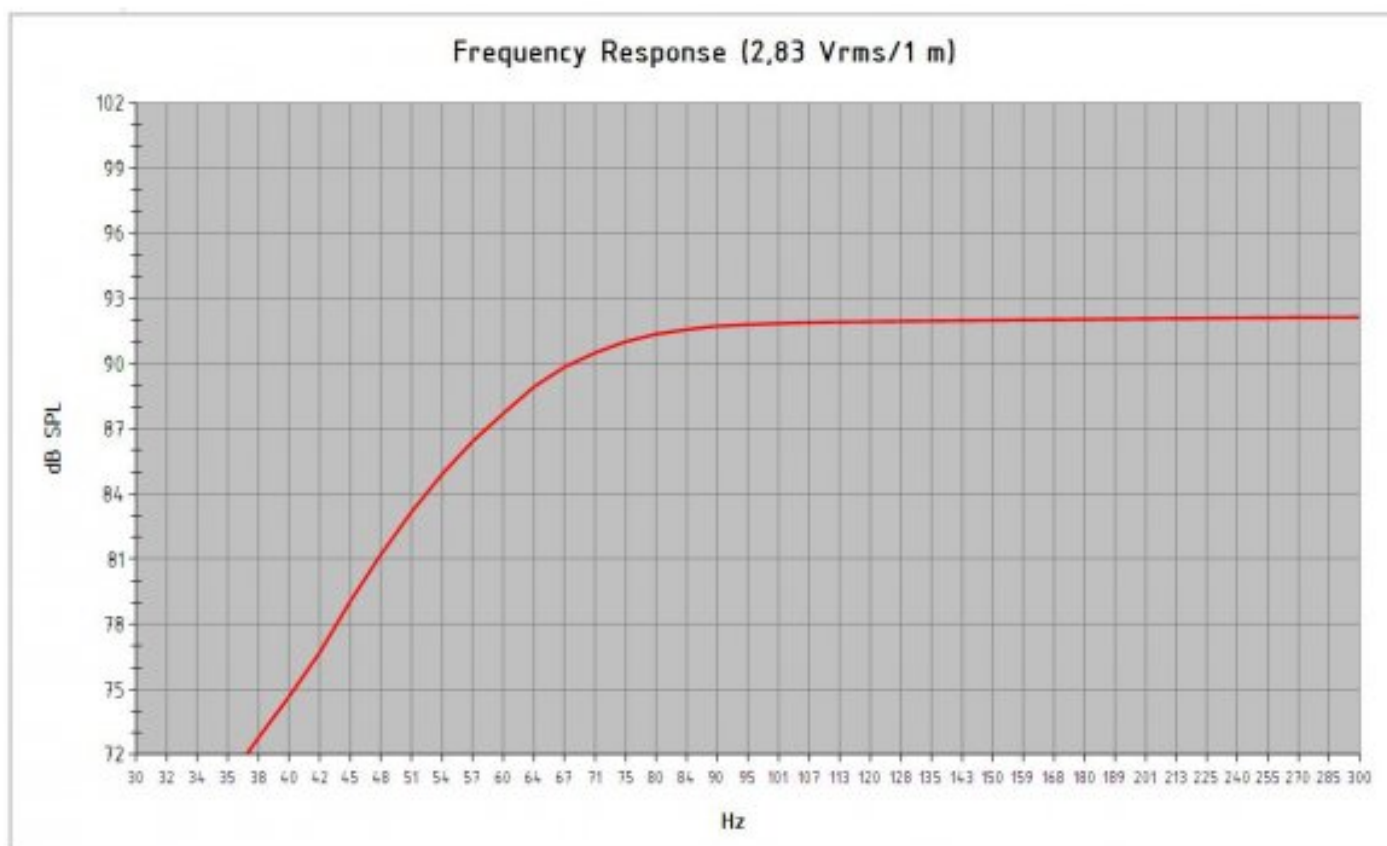

Model: **8 NDL 51**  
 Enclosure Type: **Bass Reflex**

Internal Net Volume (Liters): **14**  
 Tuning Frequency (Hz): **65**      Port Area (cm<sup>2</sup>): **32,2**  
 Frequency (-3 dB) (Hz): **64,7**      Port Length (cm): **10,8**

Excursion Limited Maximum SPL at 1 meter (dB): **113,4** equal to **160,2 Watts** (Bass Band Power Rating)  
 Thermal Limited Maximum SPL at 1 meter (dB): **114,4** equal to **200,0 Watts** (Mid Band Power Rating)



