

## DE200 16 Ω

### SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	<b>25 mm (1 in)</b>
Nominal Impedance	<b>16 Ω</b>
Minimum Impedance	<b>10.9 Ω</b>
Nominal Power Handling	<b>50 W</b>
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	<b>100 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>106 dB</b>
Applied RMS voltage is set to 4 V for 16 ohm Nominal Impedance	
Frequency Range	<b>1 kHz - 18 kHz</b>
Recommended Crossover	<b>1.6 kHz</b>
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	<b>44 mm (1.7 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.14 mH</b>
Flux Density	<b>1.5 T</b>
Diaphragm Material	<b>Titanium</b>

- 100 W continuous program power capacity
- 1" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 18000 Hz response
- 106 dB sensitivity

### MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter Three M6 holes 120° on 57 mm (2.2 in) diameter



Overall Diameter	<b>102 mm (4 in)</b>
Depth	<b>61 mm (2.4 in)</b>
Net Weight	<b>1.75 kg (3.86 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>1.78 kg (3.92 lb)</b>
Shipping Box	<b>105x105x65 mm</b> <b>(4.13x4.13x2.56 in)</b>

### SERVICE KITS

HF replacement-diaphragm	<b>MMD20016</b>
--------------------------	-----------------



## DE200 16 Ω

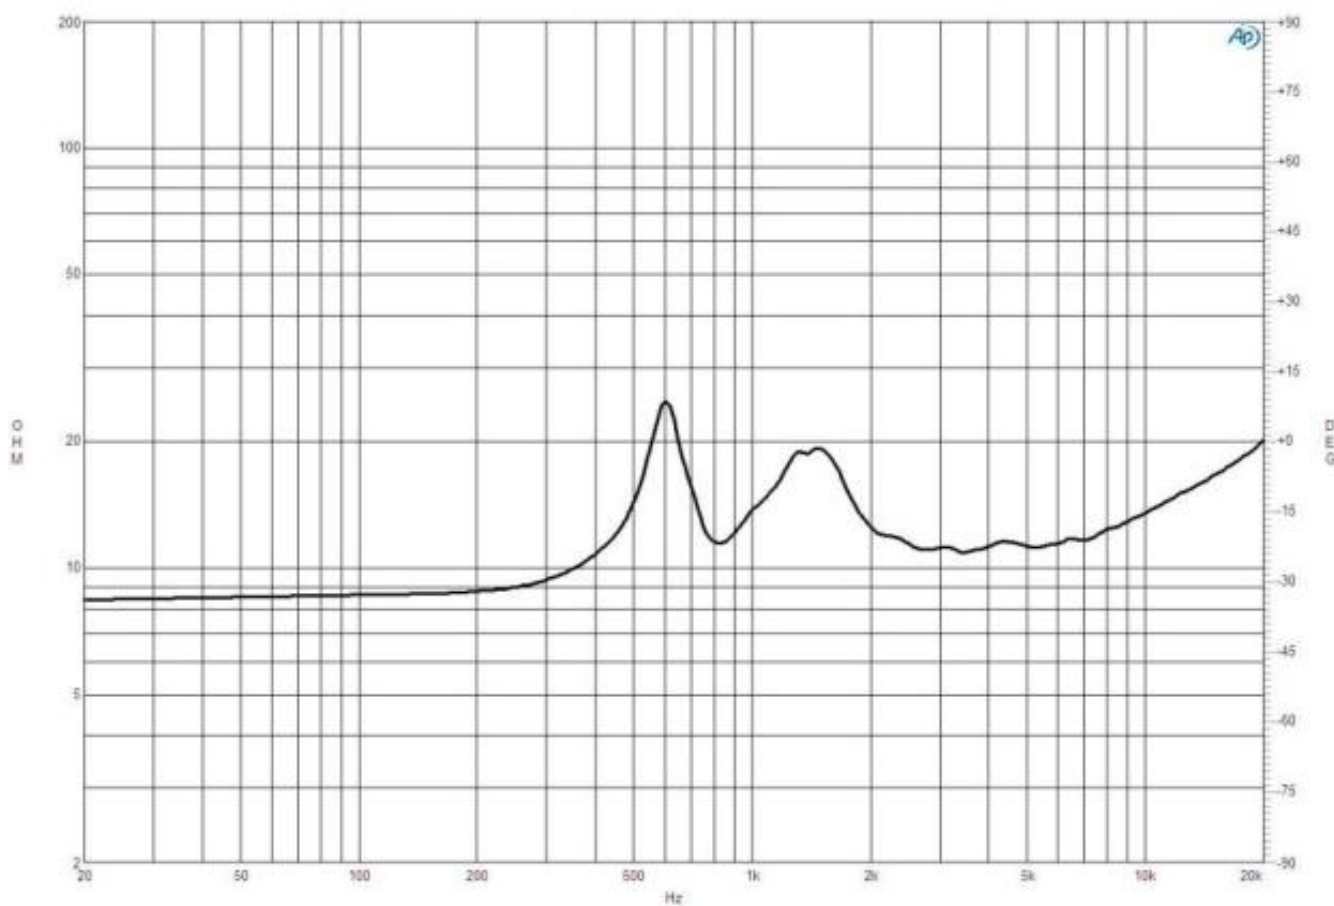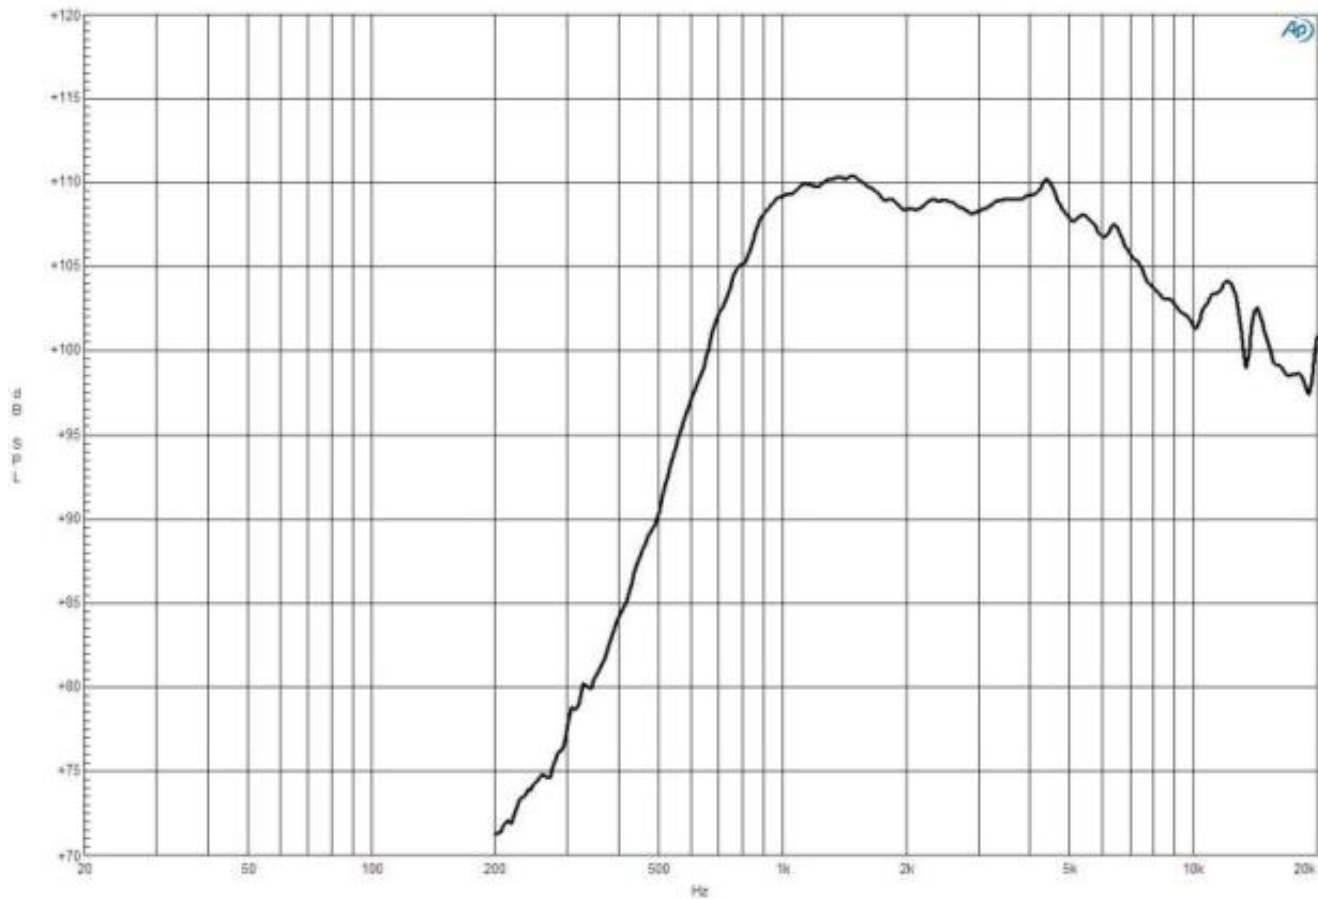

## DE200 16 Ω

