

## DE250 8 Ω

### SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	<b>25 mm (1 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>7.8 Ω</b>
Nominal Power Handling	<b>60 W</b>
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	<b>120 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>108.5 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>1 kHz - 18 kHz</b>
Recommended Crossover	<b>1.6 kHz</b>
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	<b>44 mm (1.7 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.11 mH</b>
Flux Density	<b>1.85 T</b>
Diaphragm Material	<b>Polyimide</b>

- 120 W continuous program power capacity
- 1" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Polyimide diaphragm
- 1000 - 18000 Hz response
- 108.5 dB sensitivity

### MOUNTING AND SHIPPING INFO

Two M6 holes 180° on 76 mm (3 in) diameter Three M6 holes 120° on 57 mm (2.2 in) diameter



Overall Diameter	<b>120 mm (4.7 in)</b>
Depth	<b>62 mm (2.4 in)</b>
Net Weight	<b>2.15 kg (4.74 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>2.21 kg (4.87 lb)</b>
Shipping Box	<b>120x120x65 mm</b> <b>(4.72x4.72x2.56 in)</b>

### SERVICE KITS

HF replacement-diaphragm	<b>MMDE2508</b>
--------------------------	-----------------



## DE250 8 Ω

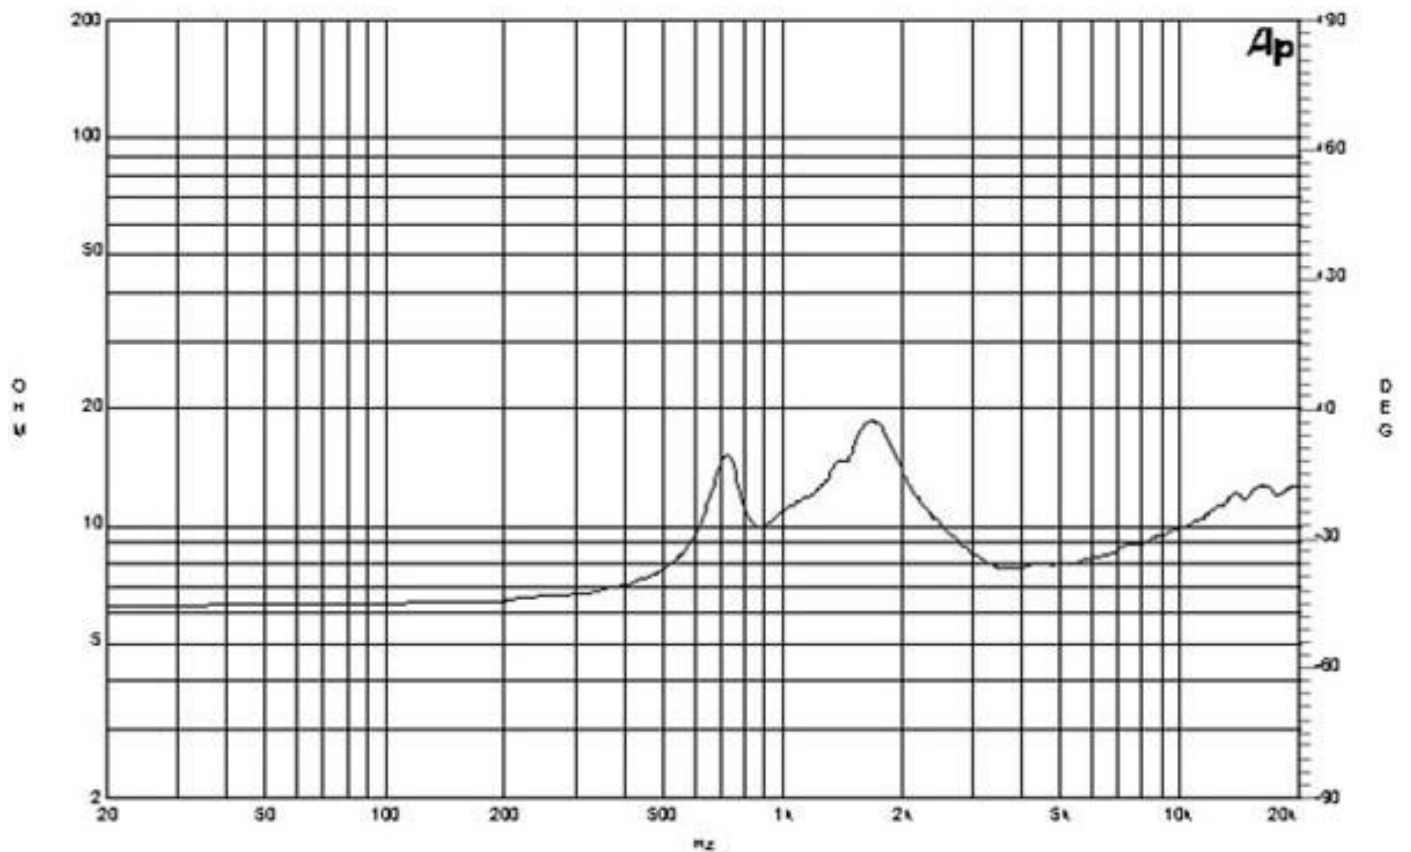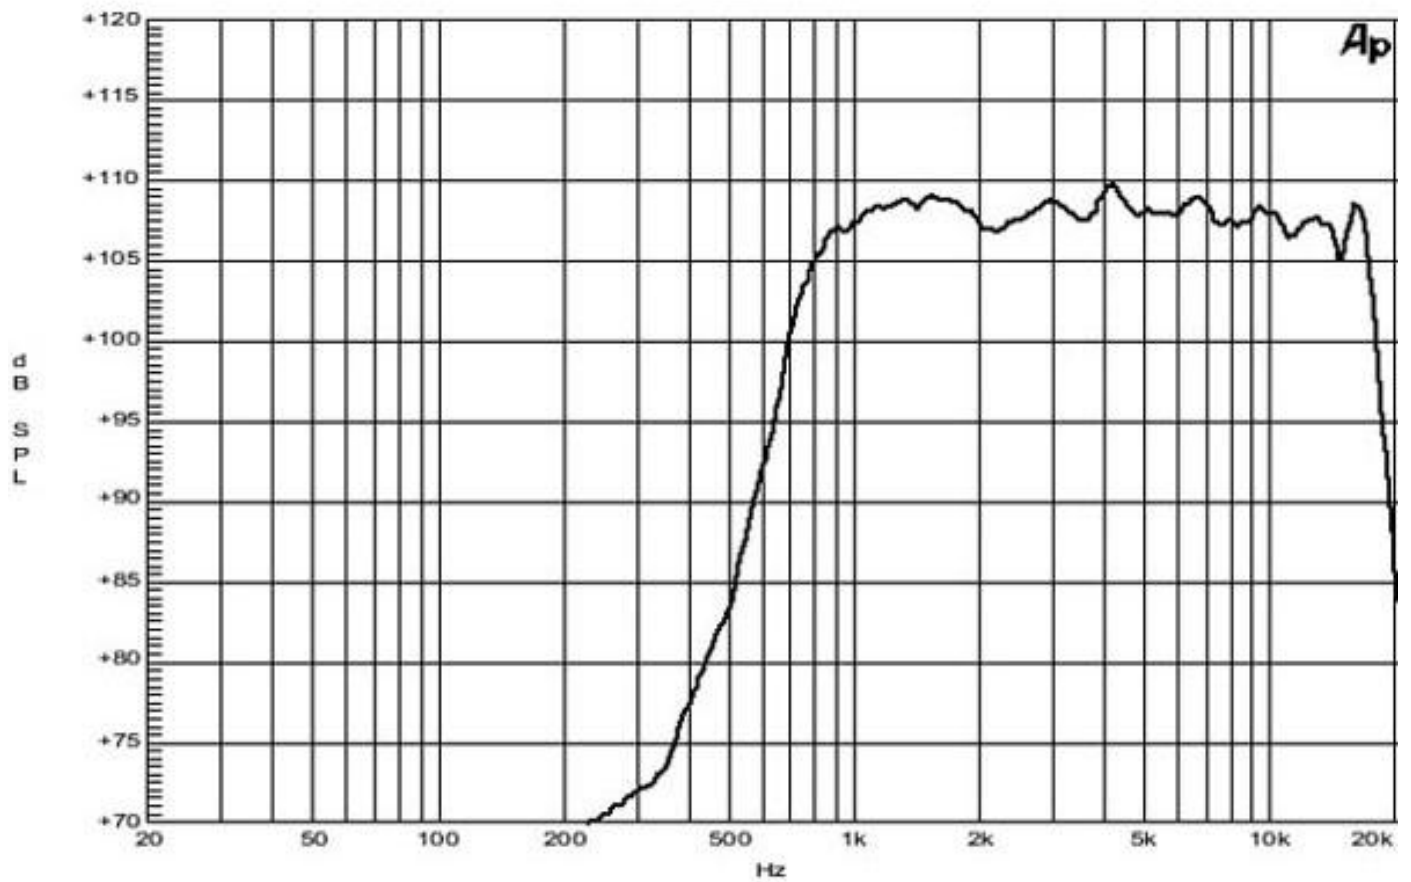

## DE250 8 Ω

