

DE5 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn + 1/2" adaptor

Throat Diameter	13 mm (0.5 in)
Nominal Impedance	8 Ω
Minimum Impedance	6.7 Ω
Nominal Power Handling	10 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	20 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	109 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	2 kHz - 18 kHz
Recommended Crossover	2.5 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	25 mm (1 in)
Winding Material	Aluminium
Inductance	0.1 mH
Flux Density	1.65 T
Diaphragm Material	Mylar

- 20 W continuous program power capacity
- 25 mm (1 in) aluminium voice coil
- 1/2" horn throat diameter
- Mylar diaphragm
- 1500 - 18000 Hz response
- 109 dB sensitivity

Available exclusively with 4.8+2.8 mm fast-on terminal tab

MOUNTING AND SHIPPING INFO

Two M4 holes 180° on 53 mm (2.1 in) diameter



Overall Diameter	62 mm (2.44 in)
Depth	34 mm (1.33 in)
Net Weight	0.17 kg (0.37 lb)
Shipping Units	1 pcs
Shipping Weight	0.18 kg (0.4 lb)
Shipping Box	65x55x40 mm (2.56x2.17x1.57 in)

SERVICE KITS

HF replacement-diaphragm	MMDDE58
--------------------------	----------------



DE5 8 Ω

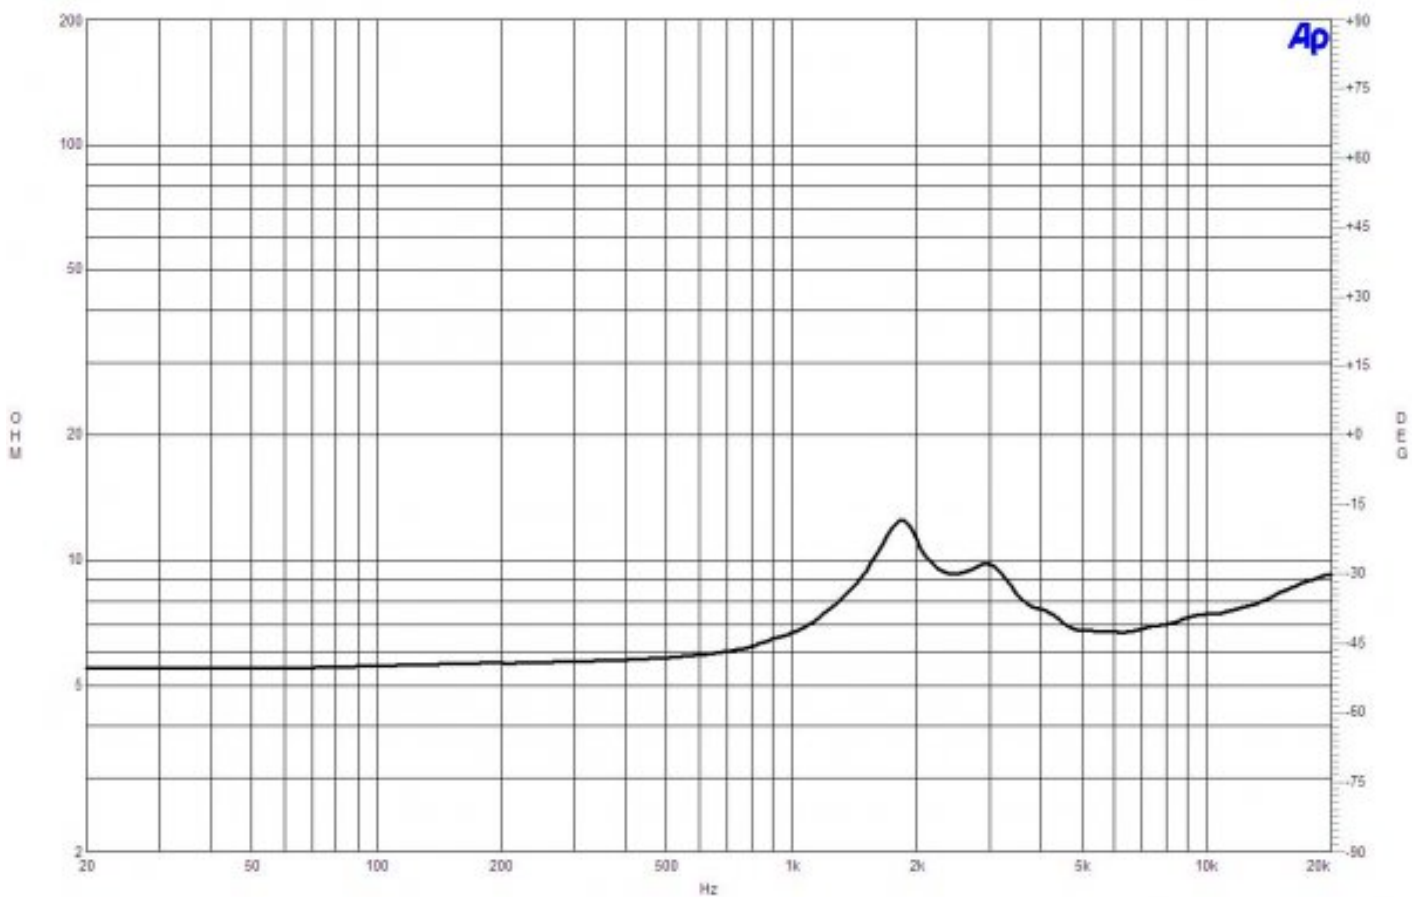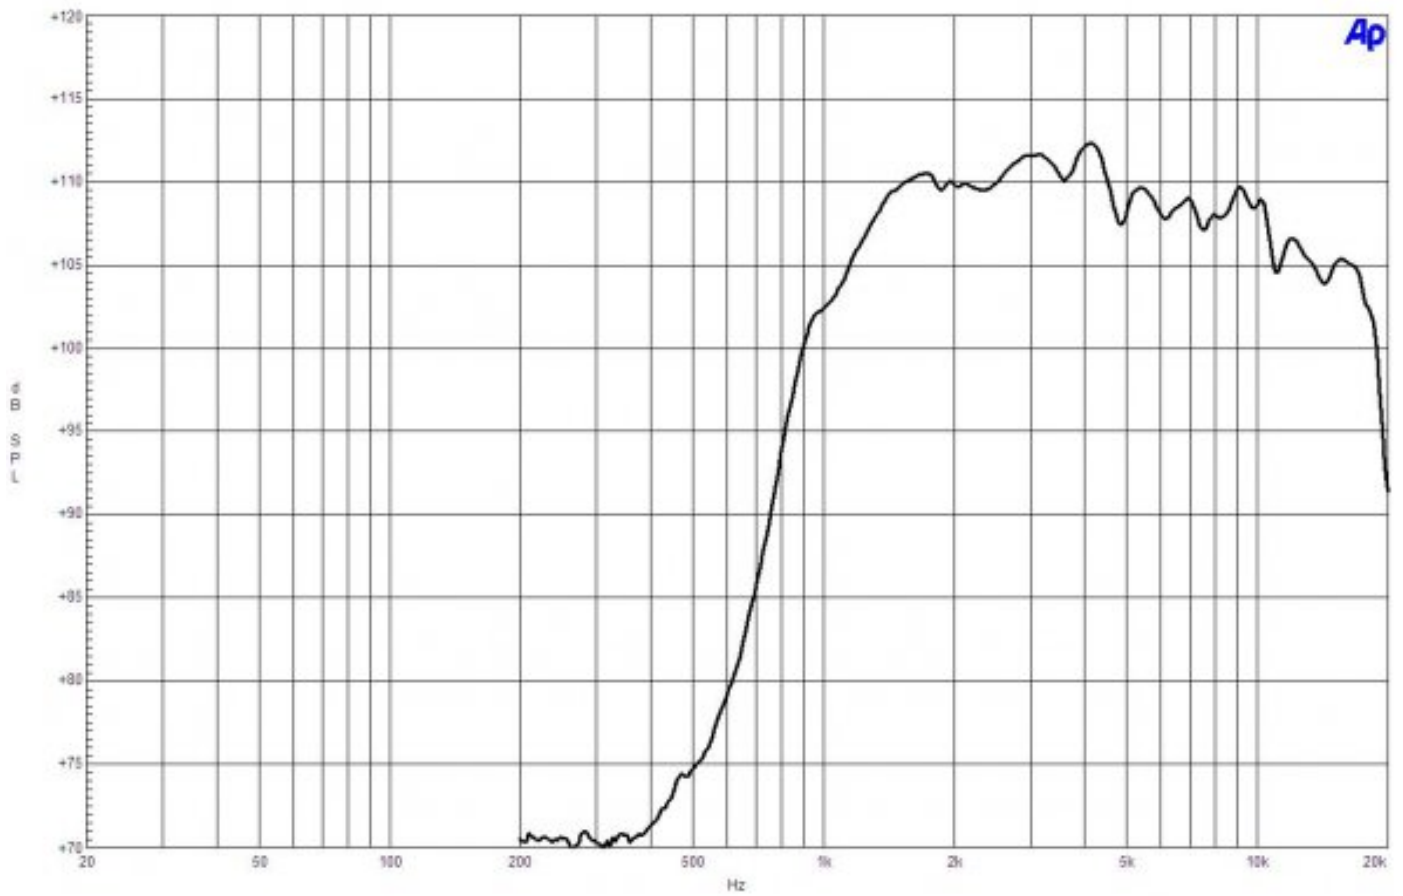

DE5 8 Ω

