

DE52 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME90 horn

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.2 Ω
Nominal Power Handling	70 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	140 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	108 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 17 kHz
Recommended Crossover	1 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	51 mm (2 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.8 T
Diaphragm Material	HT Polymer

- 140 W continuous program power capacity
- 1.4" horn throat diameter
- 51 mm (2 in) aluminium voice coil
- HT Polymer diaphragm
- 1000 - 17000 Hz response
- 108 dB sensitivity

MOUNTING AND SHIPPING INFO

Four M6 holes 180° on 76 mm (3 in) diameter



Overall Diameter	134 mm (5.28 in)
Depth	60 mm (2.36 in)
Net Weight	2.8 kg (6.17 lb)
Shipping Units	1 pcs
Shipping Weight	2.84 kg (6.25 lb)
Shipping Box	135x135x65 mm (5.31x5.31x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMD5508
--------------------------	----------------



DE52 8 Ω

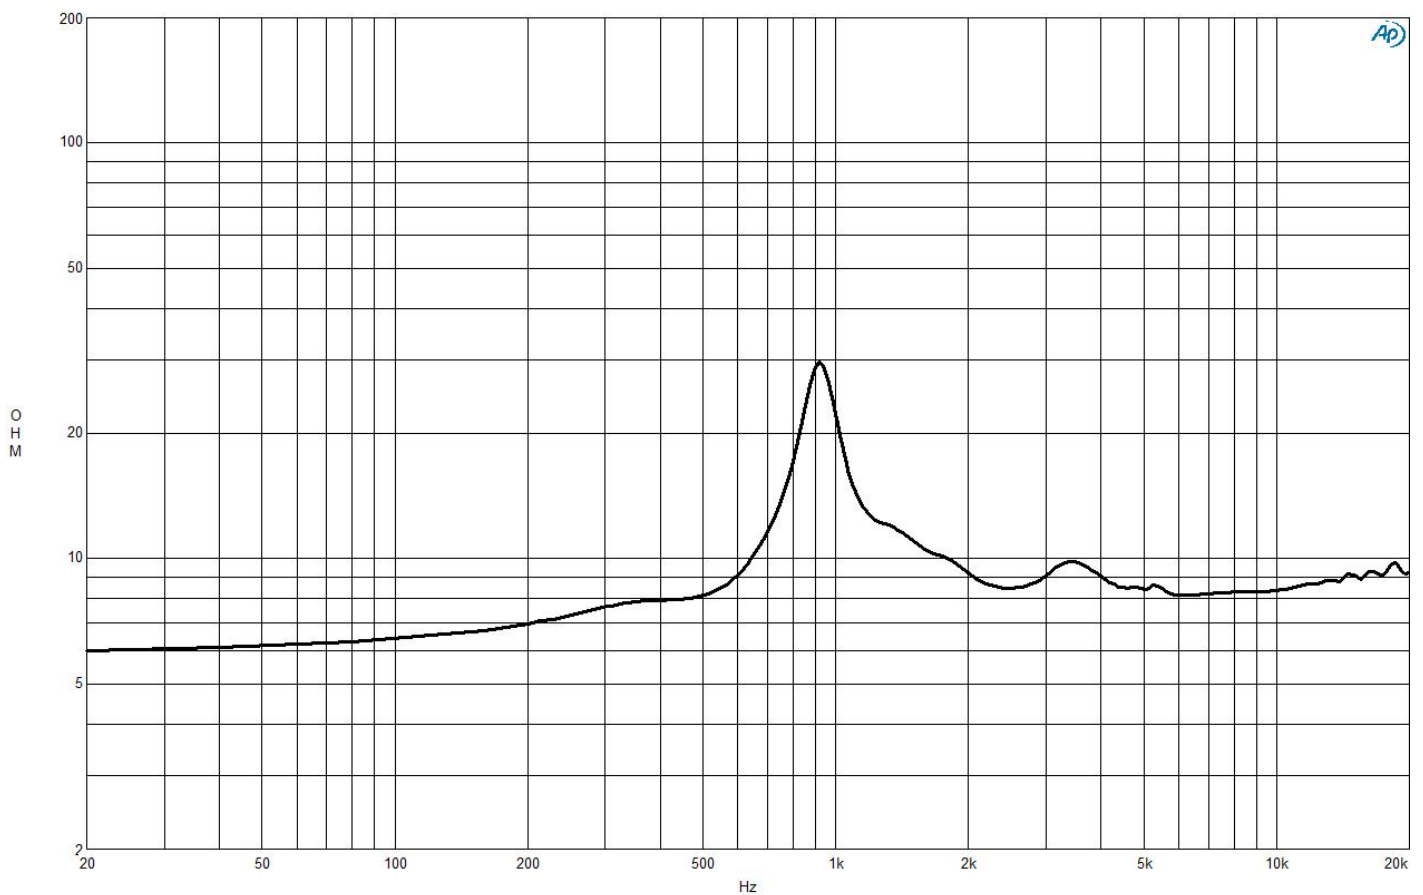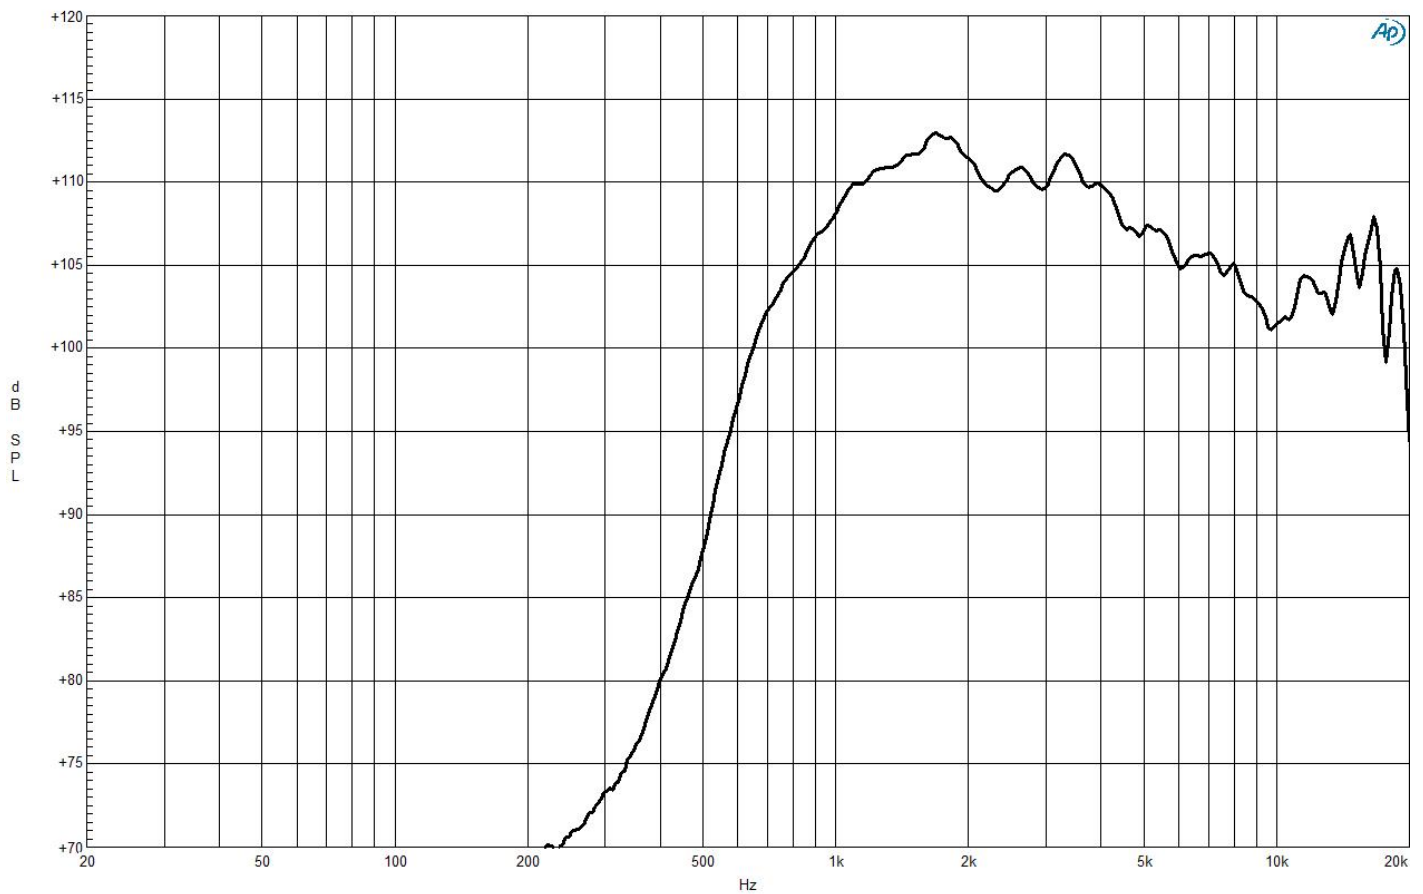

DE52 8 Ω

