

DE610 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.6 Ω
Nominal Power Handling	80 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	160 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	108 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1.2 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	65 mm (2.5 in)
Winding Material	Aluminium
Inductance	0.15 mH
Flux Density	1.75 T
Diaphragm Material	Titanium

- 160 W continuous program power capacity
- 1.4' horn throat diameter
- 65 mm (2.5 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 18000 Hz response
- 108 dB sensitivity
- Shorting copper cap for extended HF response

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	156 mm (6.1 in)
Depth	65 mm (2.5 in)
Net Weight	3.8 kg (8.4 lb)
Shipping Units	1 pcs
Shipping Weight	3.92 kg (8.64 lb)
Shipping Box	190x190x80 mm (7.48x7.48x3.15 in)

SERVICE KITS

HF replacement-diaphragm	MMD6108
--------------------------	----------------



DE610 8 Ω

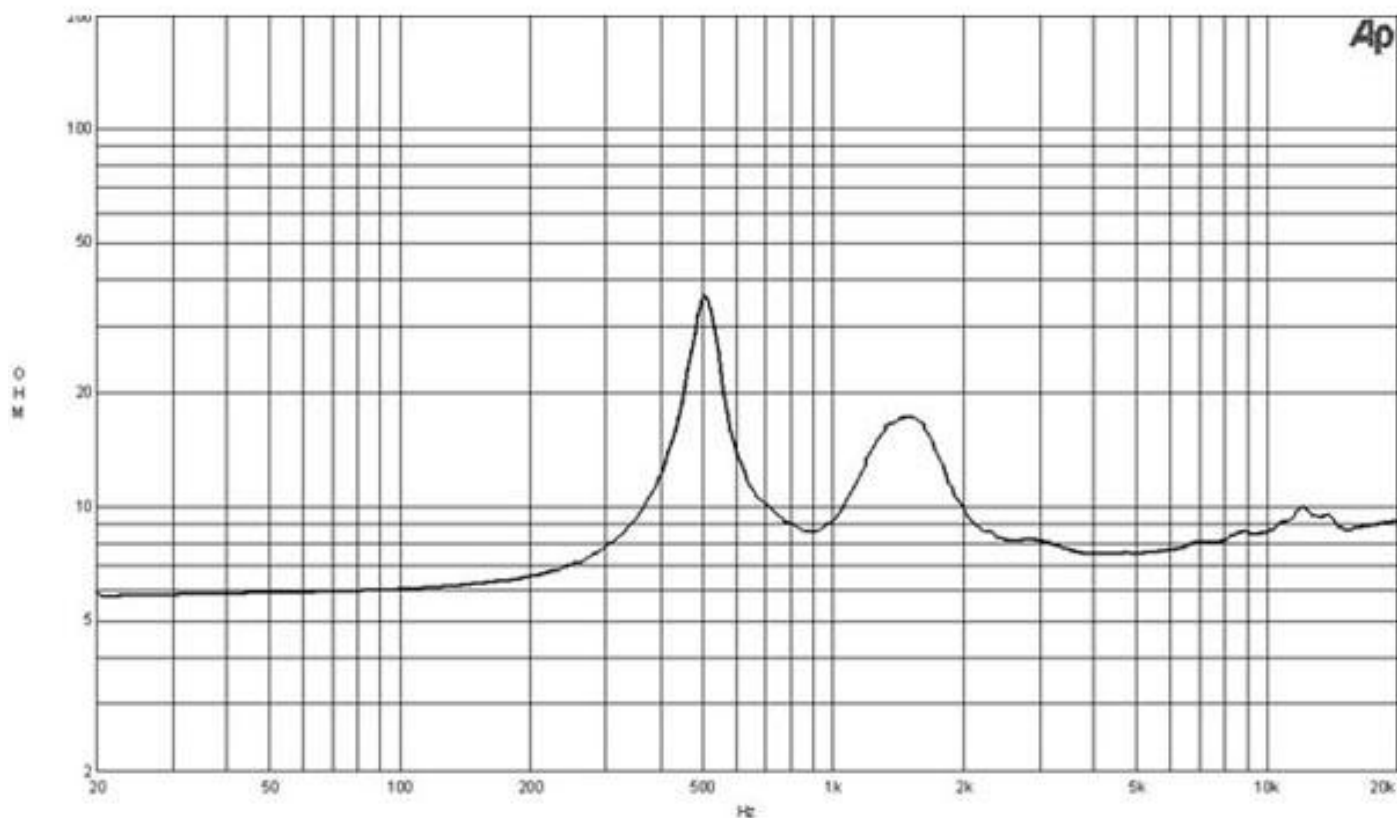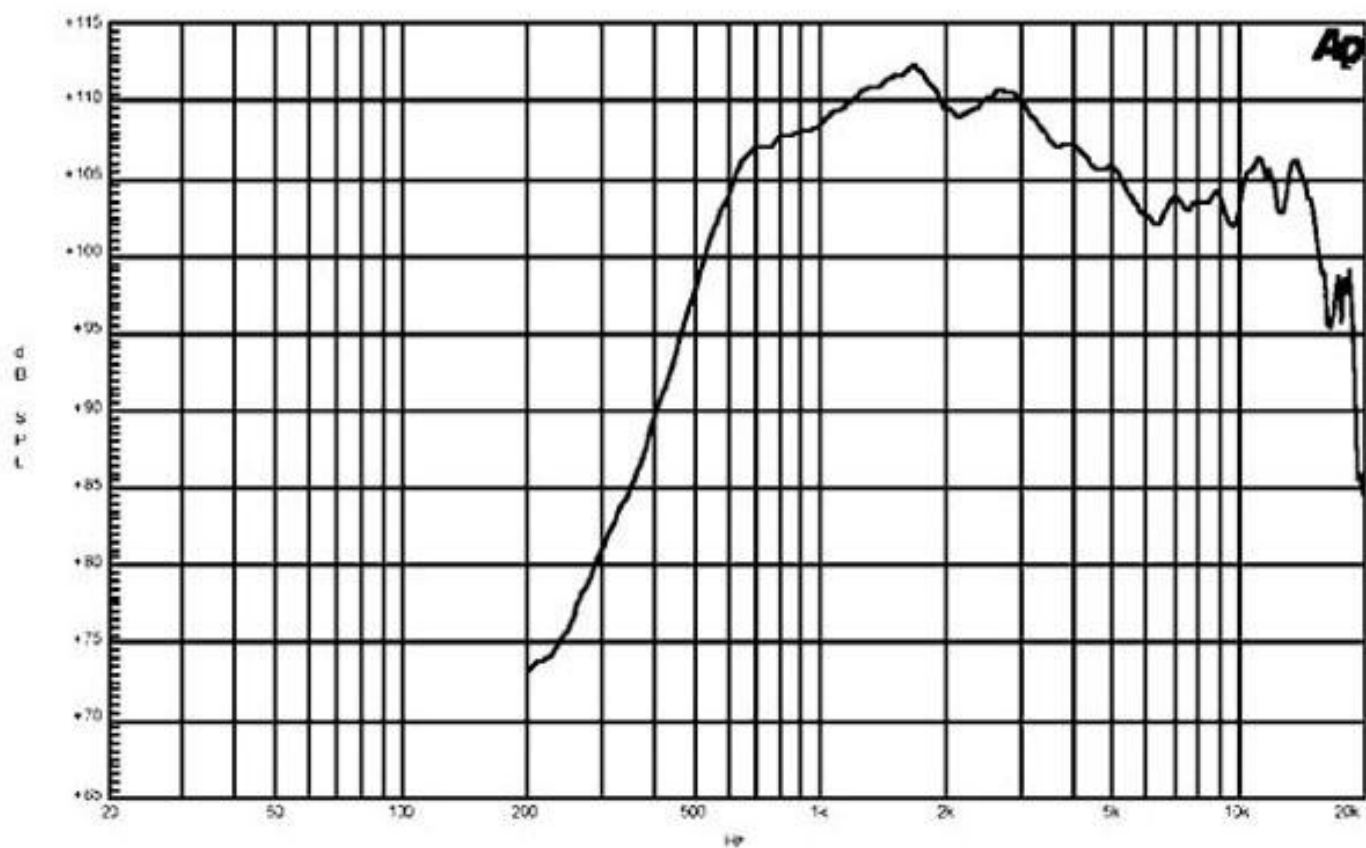

DE610 8 Ω

