

DE800 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	8 Ω
Nominal Power Handling	110 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	220 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	108 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1.2 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.85 T
Diaphragm Material	Composite Polyimide/Titanium

- 220 W continuous program power capacity
- 1.4' horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Composite Polyimide/Titanium diaphragm
- 500 - 18000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	124 mm (4.9 in)
Depth	56 mm (2.2 in)
Net Weight	2.3 kg (5.1 lb)
Shipping Units	1 pcs
Shipping Weight	2.35 kg (5.17 lb)
Shipping Box	140x135x62 mm (5.51x5.31x2.44 in)

SERVICE KITS

HF replacement-diaphragm	MMD8008M
--------------------------	-----------------



DE800 8 Ω

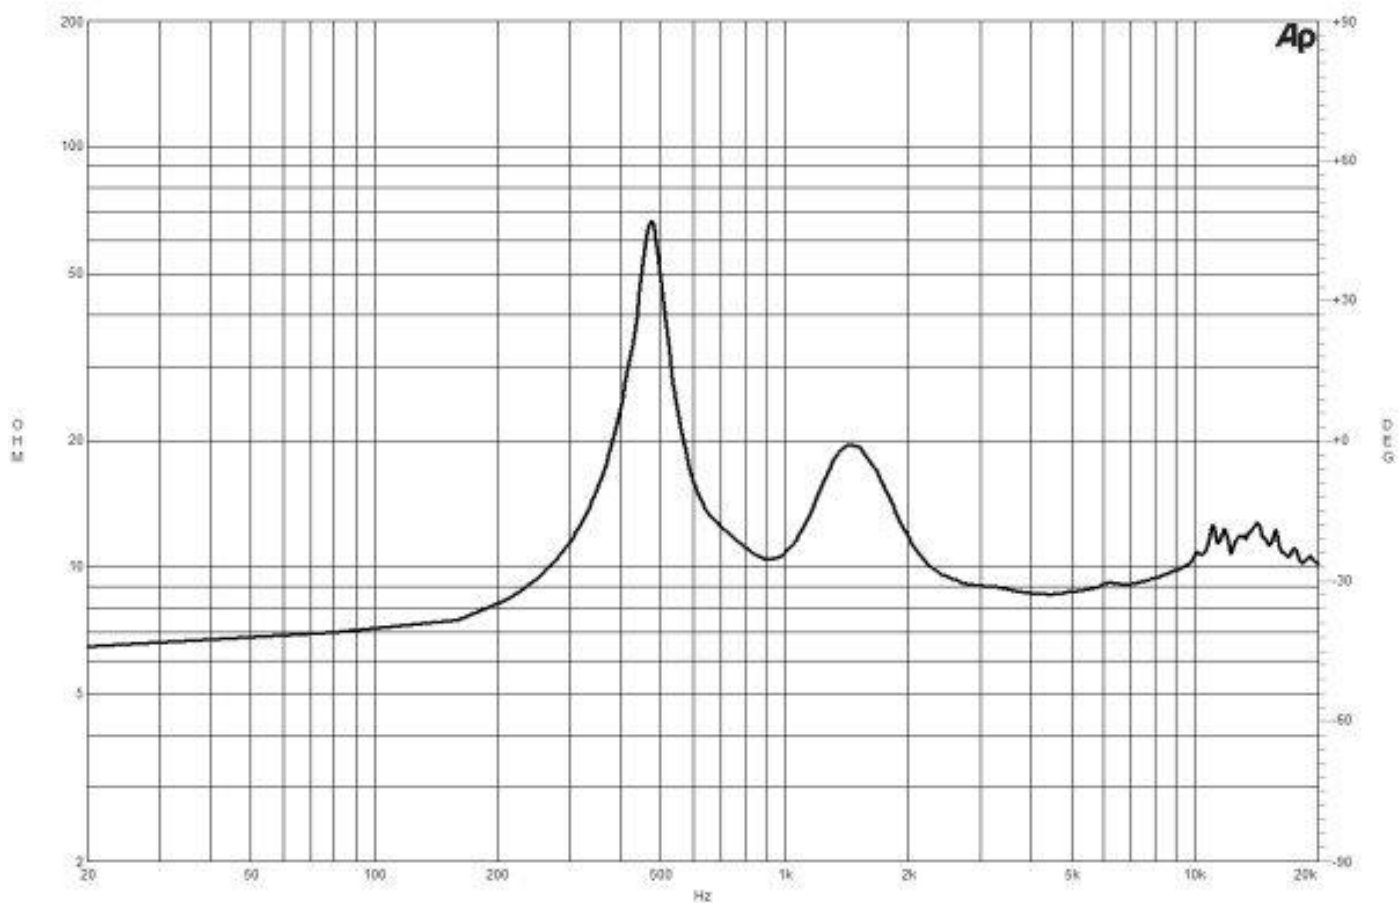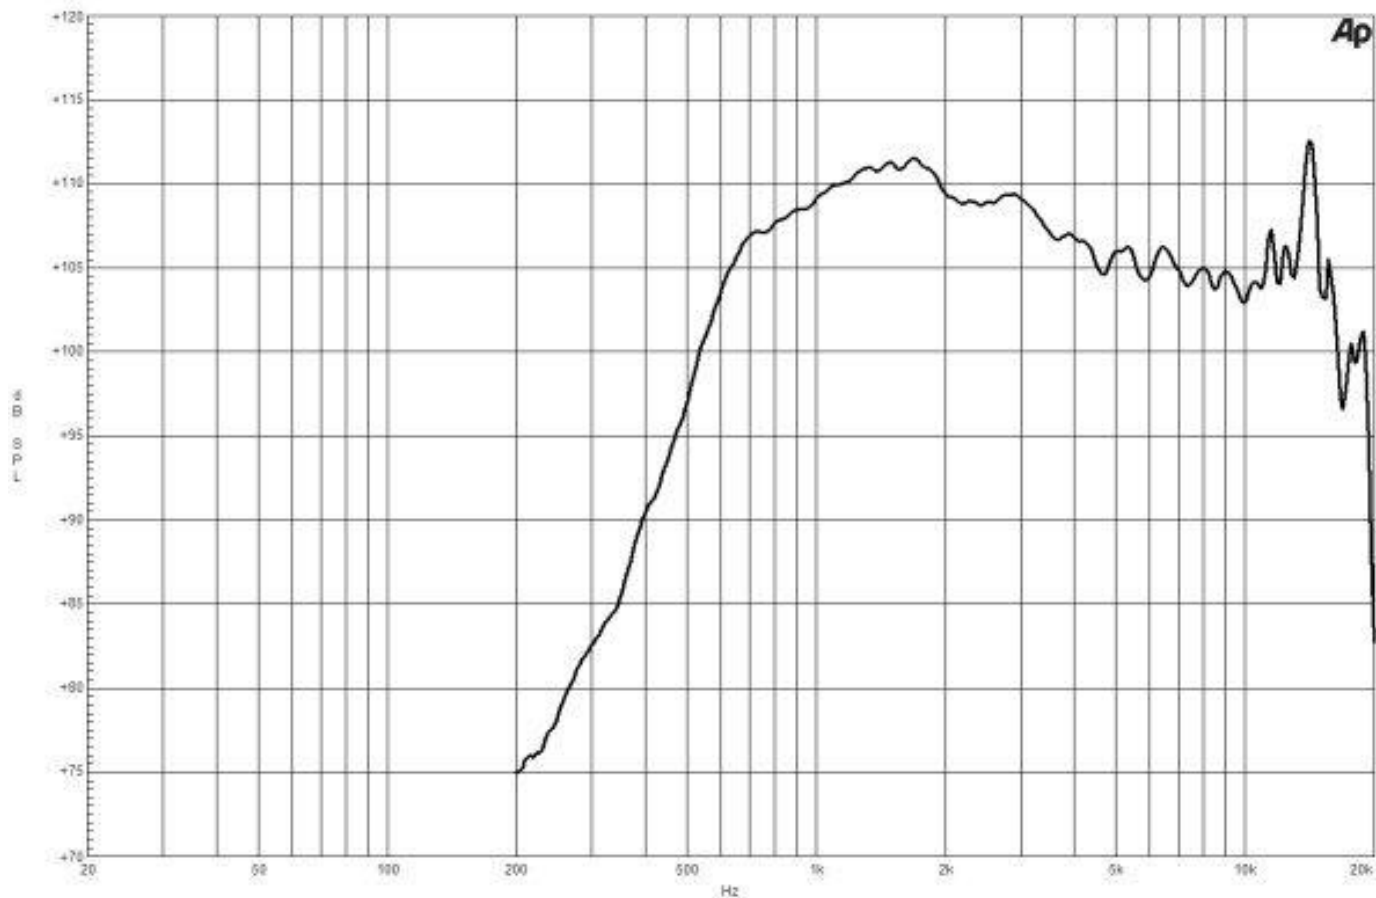

DE800 8 Ω

