

DE991TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	100 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	200 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	108 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	0.8 kHz - 17 kHz
Recommended Crossover	1 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	86 mm (3.4 in)
Winding Material	Aluminium
Inductance	0.1 mH
Flux Density	1.94 T
Diaphragm Material	Titanium

- 200 W continuous program power capacity
- 1.4" horn throat diameter
- 86 mm (3.4 in) aluminium voice coil
- Titanium diaphragm
- 800 - 17000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	115 mm (4.53 in)
Depth	64 mm (2.52 in)
Net Weight	2 kg (4.41 lb)
Shipping Units	1 pcs
Shipping Weight	2.04 kg (4.49 lb)
Shipping Box	120x120x65 mm (4.72x4.72x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMD35FTN8M
--------------------------	-------------------



DE991TN 8 Ω

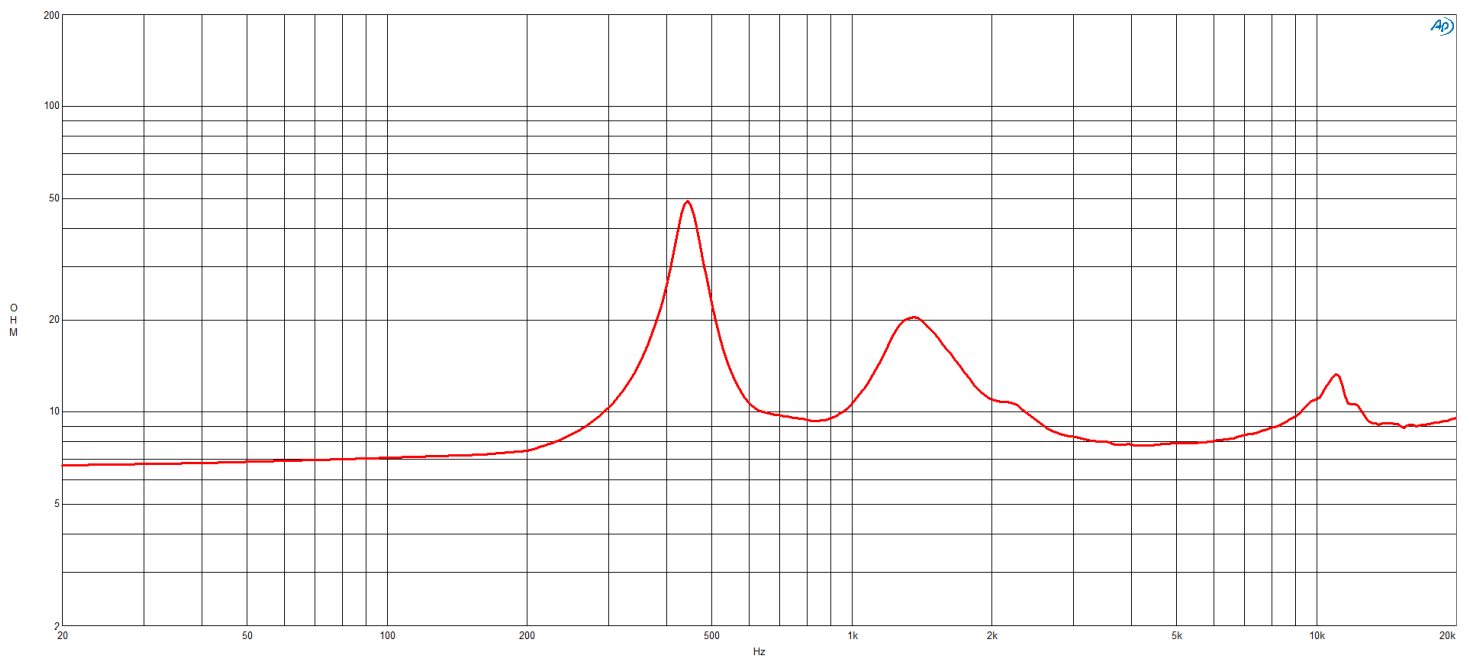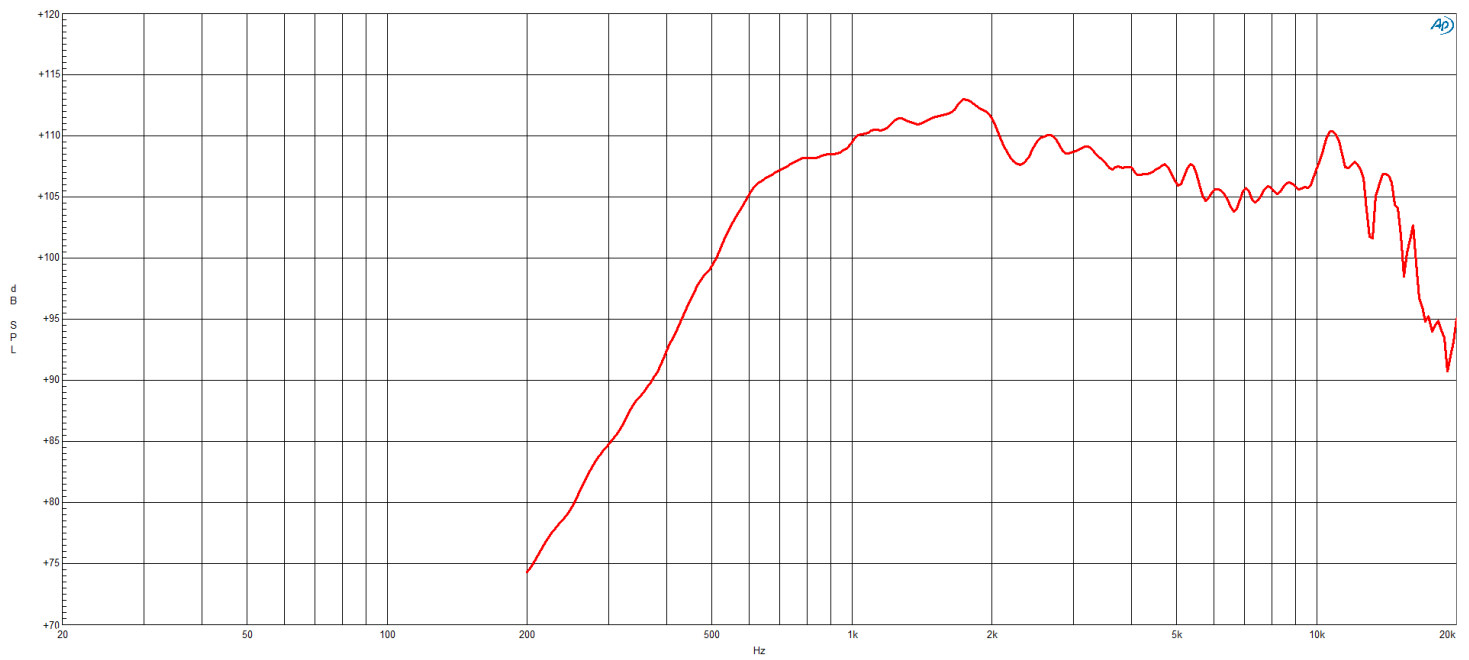

DE991TN 8 Ω

