

DH350H 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME 45 horn.

Throat Diameter	25 mm (1 in)
Nominal Impedance	16 Ω
Minimum Impedance	10.4 Ω
Nominal Power Handling	30 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	60 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	109.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 17 kHz
Recommended Crossover	1 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.15 mH
Flux Density	1.8 T
Diaphragm Material	HT Polymer

MOUNTING AND SHIPPING INFO

<p>Two M5 holes 180° on 53 mm (2.09 in) diameter. </p><p>Diameter is 64mm at widest point (driver rotated, across mounting studs)</p>

Overall Diameter	48 mm (1.89 in)
Depth	62 mm (2.44 in)
Net Weight	0.27 kg (0.6 lb)
Shipping Units	1 pcs
Shipping Weight	0.295 kg (0.65 lb)
Shipping Box	105x105x65 mm (4.13x4.13x2.56 in)

SERVICE KITS

HF replacement-diaphragm	MMDDH35016
--------------------------	-------------------

- Ultra Compact 48mm diameter
- 60 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- HT Polymer diaphragm
- 1000 - 17000 Hz response
- 109.5 dB sensitivity



HLX Series - The Helical Approach

B&C has a reputation for performance, by turning the limits of traditional compression driver design on their head. HLX™: Compression driver efficiency in miniature. The HLX™ phase plug (US Patent #12149906) has a central channel that is twisted, like DNA, to gain the length required to match the outer channels. This technique works with standard, cost-effective injection mold tooling and plastics by rotating the inner die along a screw profile. The convex dome design, so achieved, has a number of significant cost and performance advantages.

- Minimized diameter, weight, and cost
- Increased diaphragm area
- Low, ~1kHz Crossover point
- Reduced distortion, especially intermodulation distortion
- More efficient magnetic flux use



DH350H 16 Ω

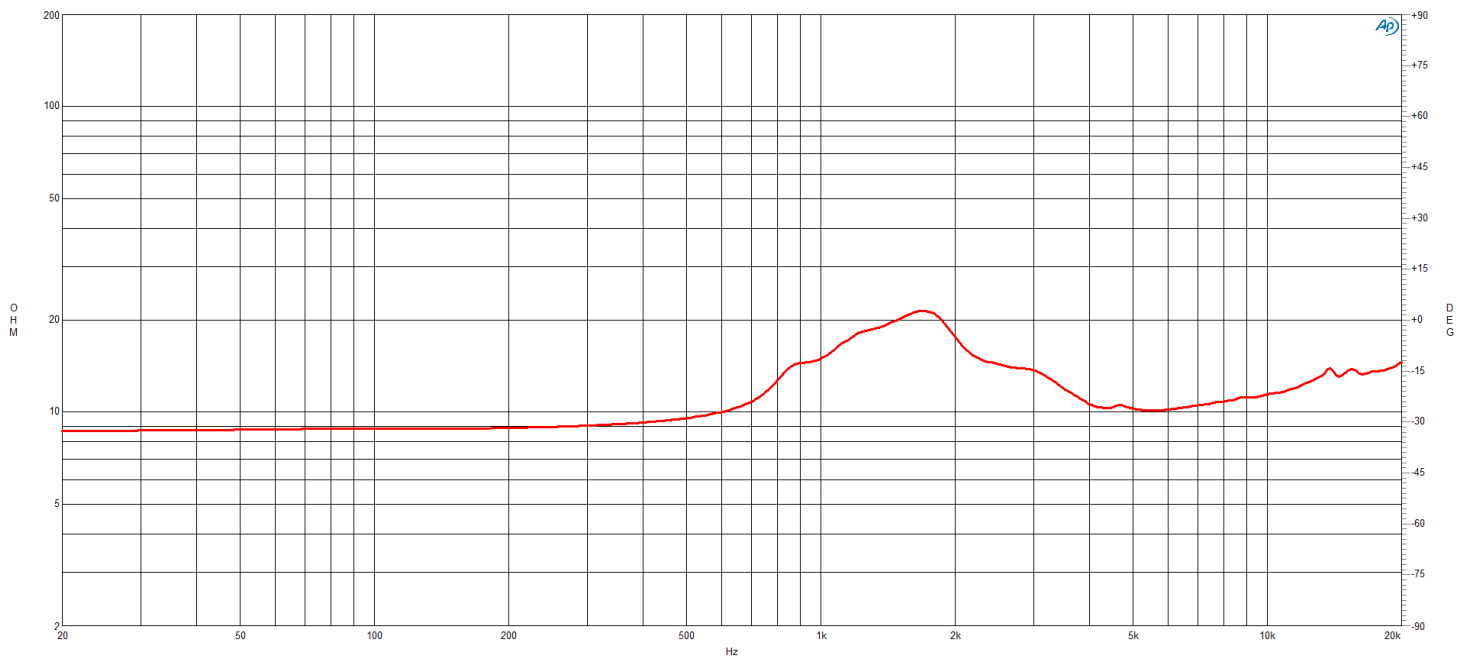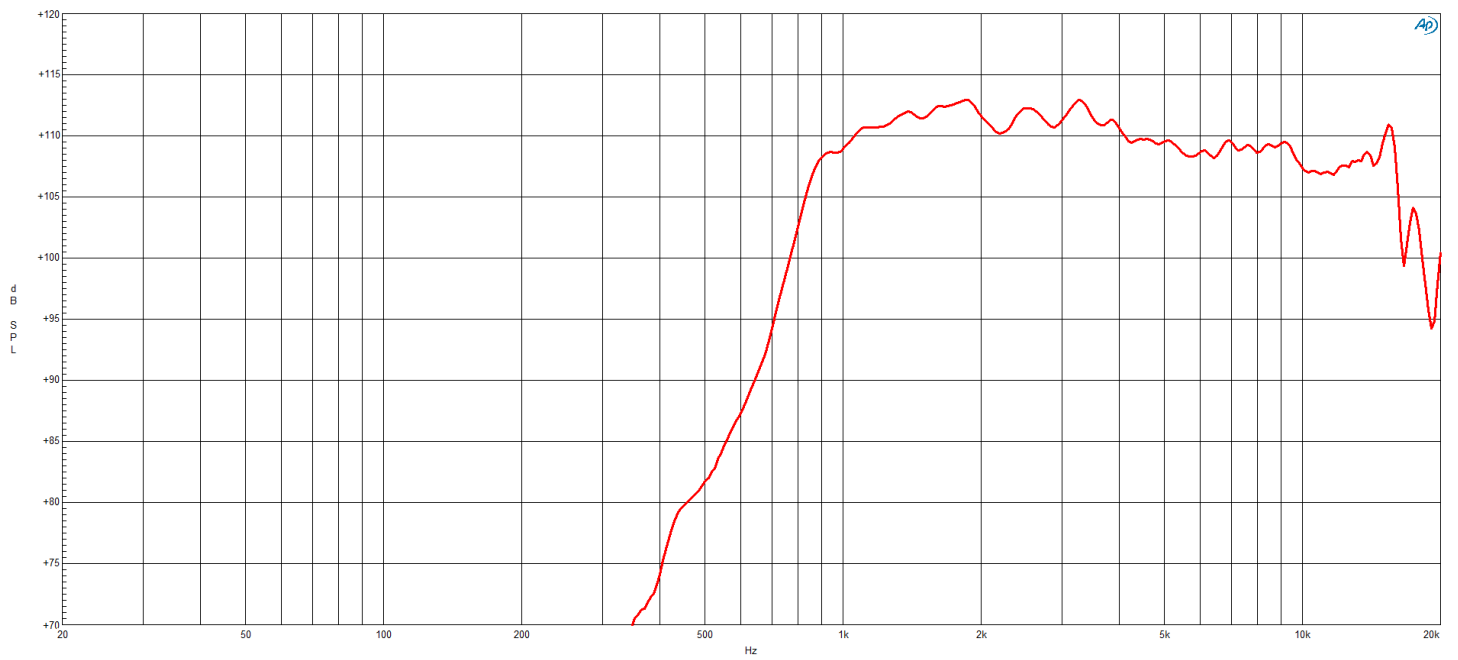

DH350H 16 Ω

