

# Crossovers

## FB354V2 16 $\Omega$

### SPECIFICATIONS

Frequency response and Impedance graphs measured on ME464 horn

Crossover Frequency	<b>5.6 kHz</b>
Filter Type	<b>Two Way</b>
Slope	<b>18 - 12 dB/oct</b>
Overall Dimensions	<b>105x137 mm (4.13x5.39 in)</b>


### MOUNTING AND SHIPPING INFO

Other details	<b>4 mm diameter holes on the PCB at 127 mm x 95 mm</b>
Net Weight	<b>0.53 kg (1.17 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>0.57 kg (1.26 lb)</b>
Shipping Box	<b>147x117x58 mm (5.79x4.61x2.28 in)</b>

### POTENTIAL APP. COAXIALS HF



DCX354	<b>16<math>\Omega</math></b>
--------	------------------------------

Reinforced PRO version of the popular FB354 crossover, for more challenging applications. The FB354v2 shares the same circuit diagram of the FB354, substituting inductors with higher power ratings and eliminating the built-in light bulb protection network. The FB354v2 allows the user more control to optimize DSP limiter settings for higher maximum SPL while maintaining a safe work margin for the DCX354.

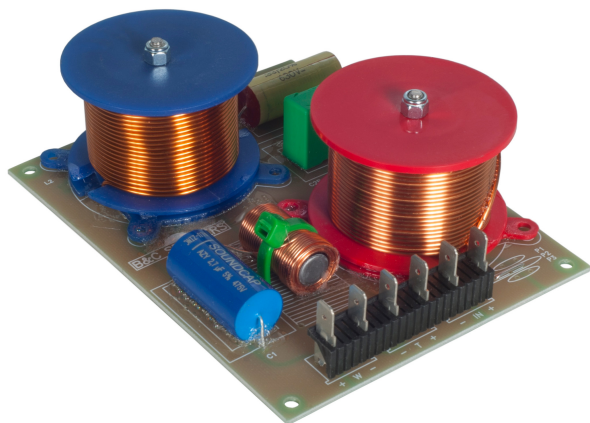

# Crossovers

## FB354V2 16 Ω

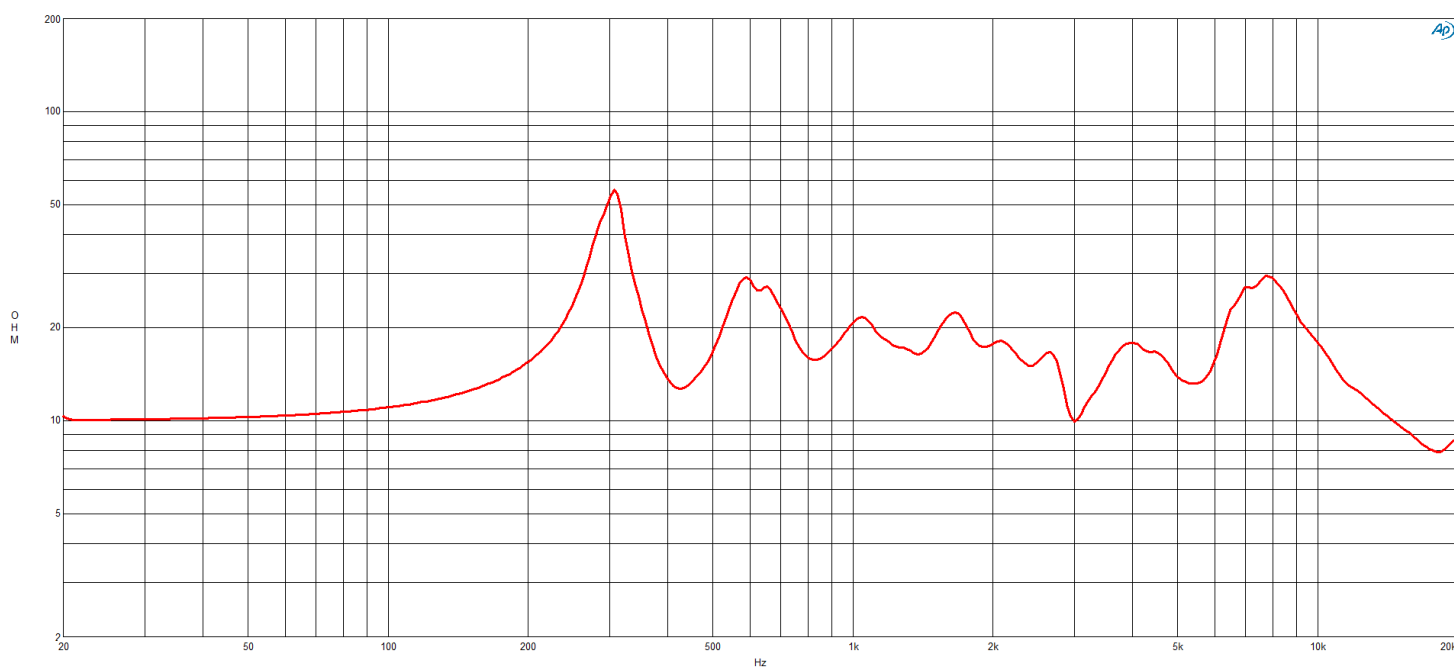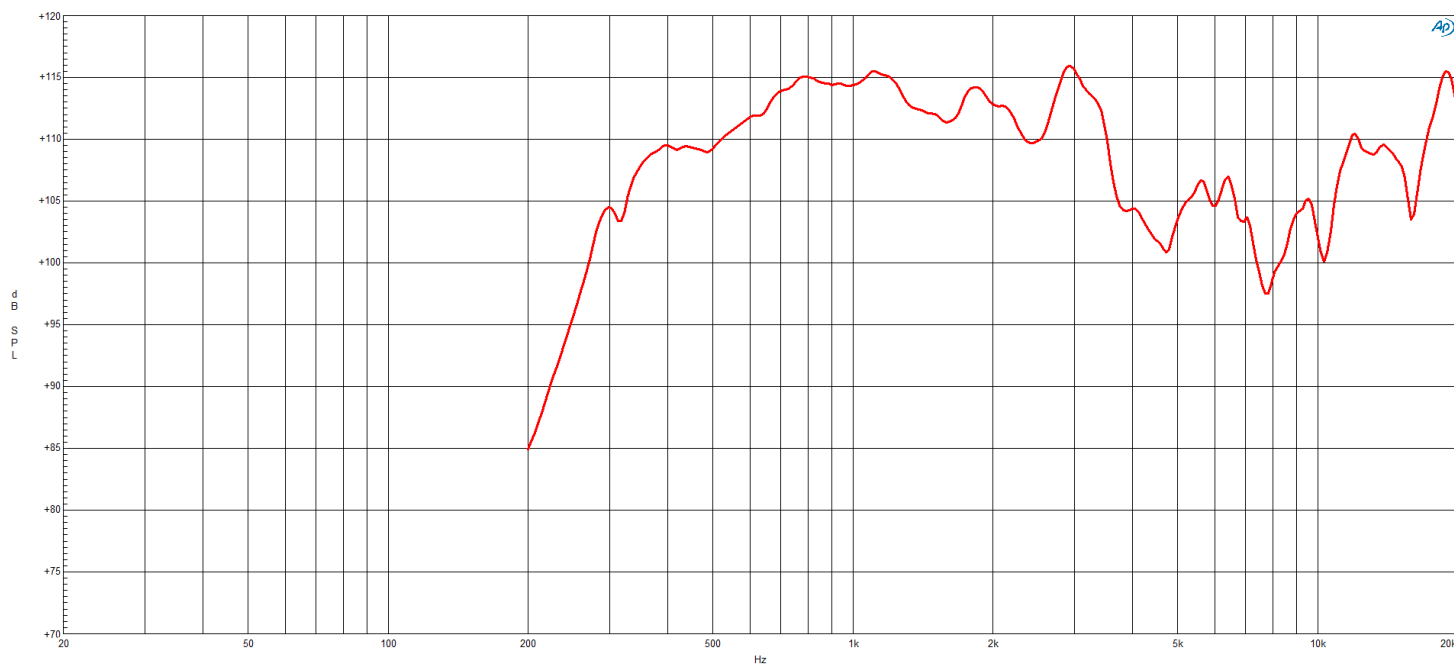

# Crossovers

## FB354V2 16 Ω

