

HF146

SPECIFICATIONS

Frequency response and Impedance measured with DCX354-8+ME146+HF146	
Nominal Coverage Horizontal	100°
Cutoff Frequency	0.7 kHz
Material	PC/ABS/GF blend
Design	Constant Directivity
Dimensions	260x200x75 mm



MOUNTING AND SHIPPING INFO

Net Weight	0.45 kg (0.99 lb)
Shipping Units	1 pcs
Shipping Weight	0.72 kg (1.59 lb)
Shipping Box	280x270x100 mm



- Horn Flare specifically optimized for ME146
- 100° horizontal coverage
- Vertical coverage depends on configuration
- Very good loading and directivity control down to 700 Hz



HF146

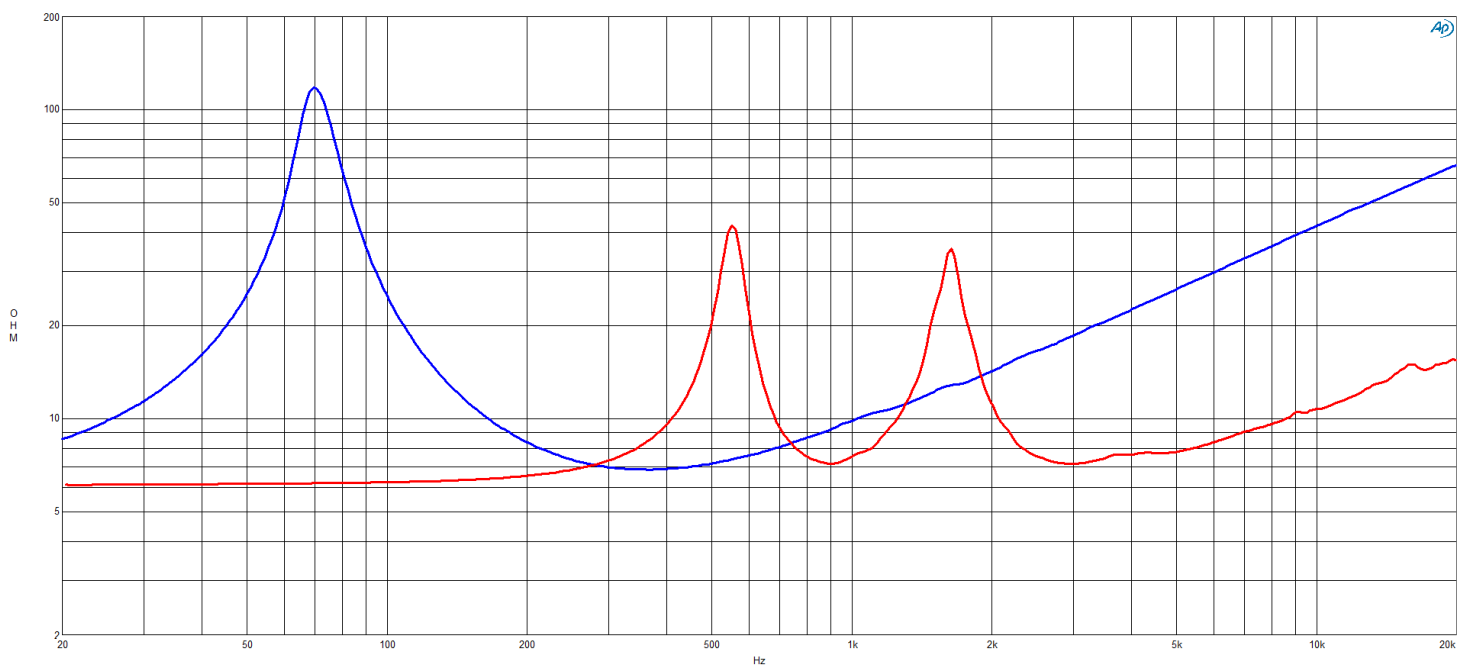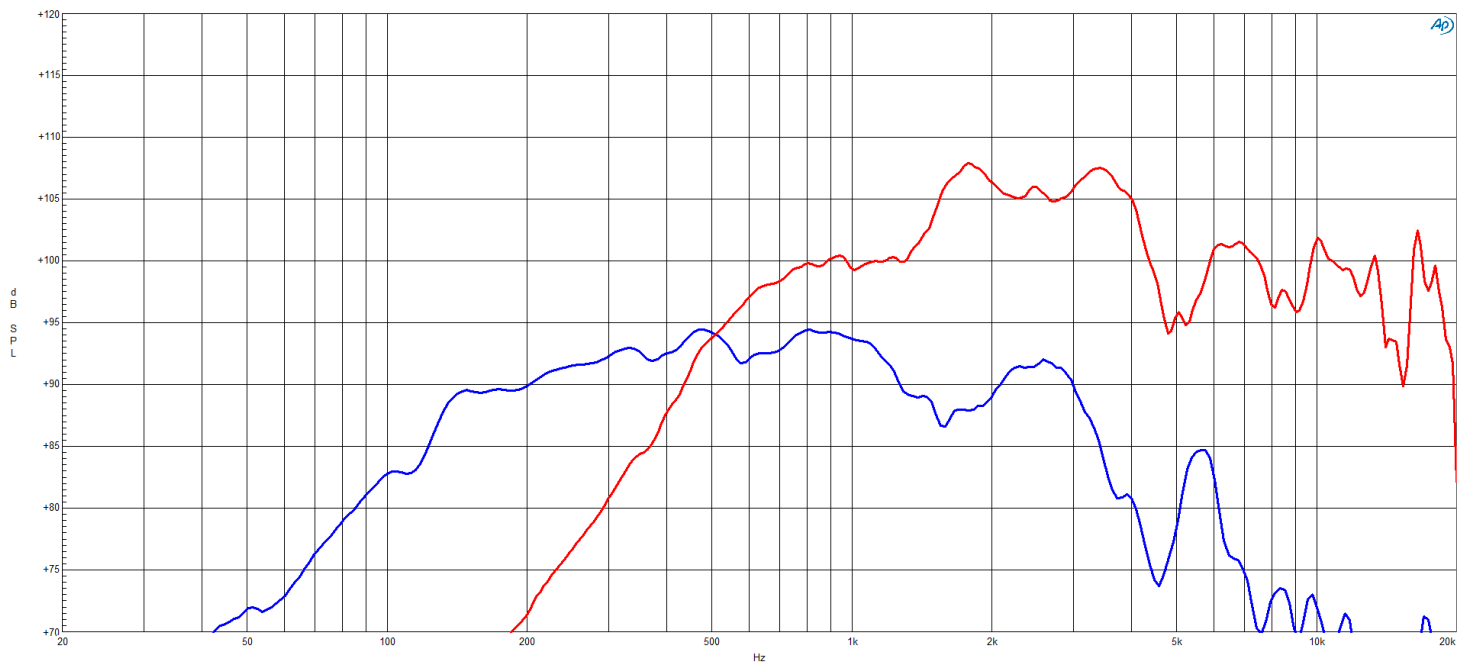

HF146

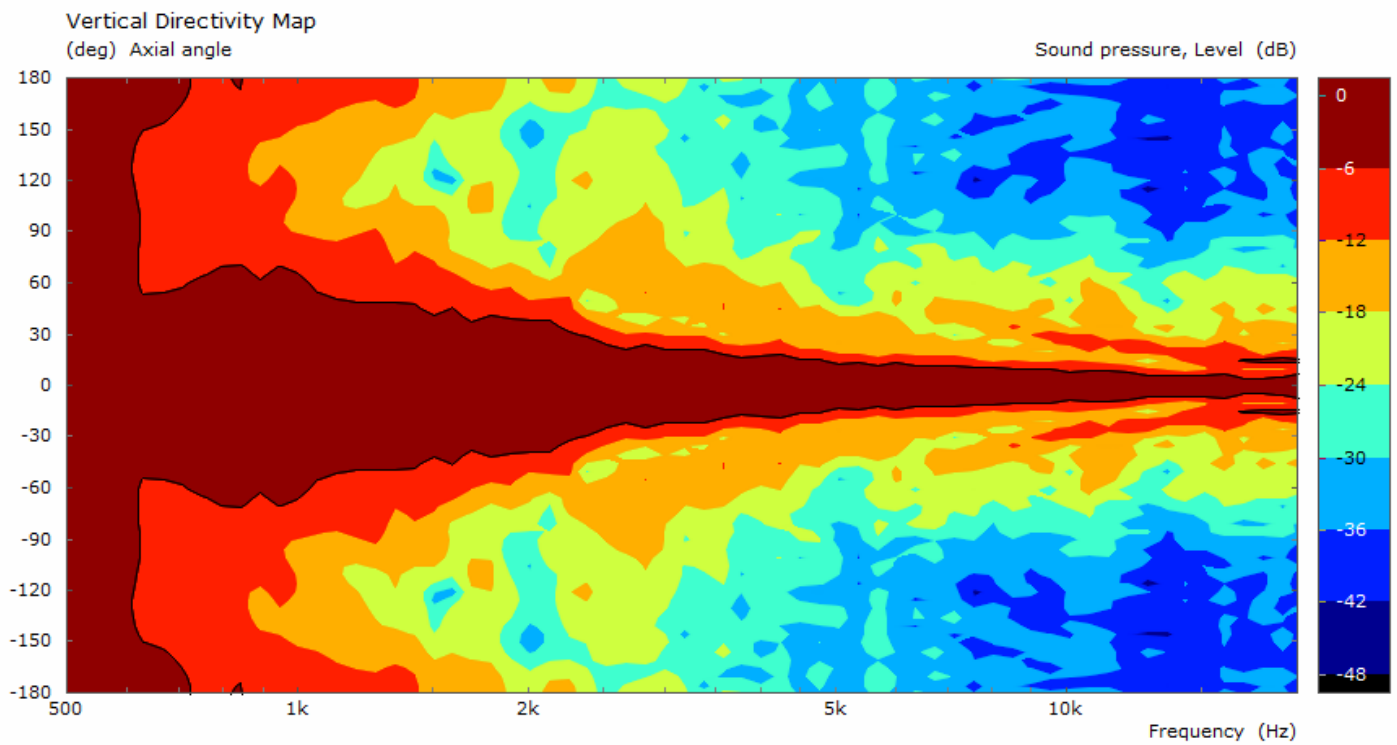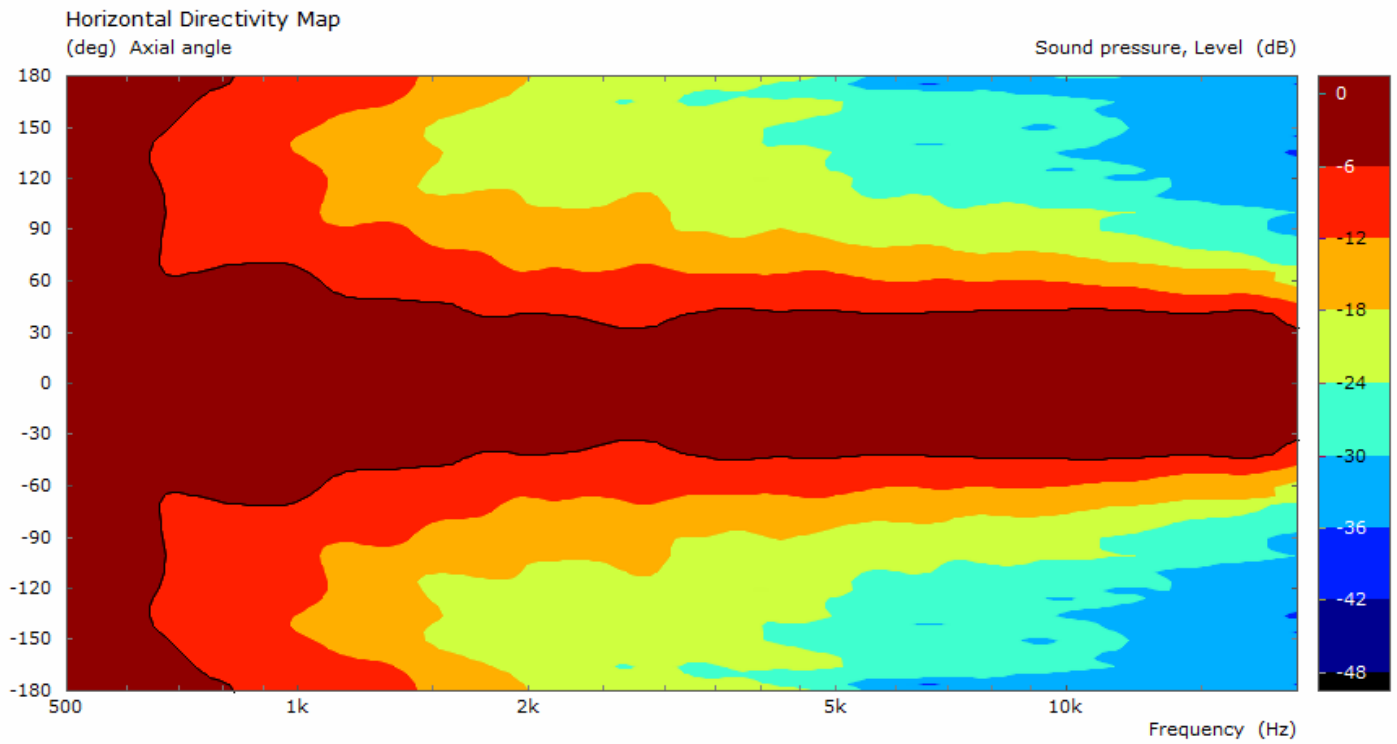

HF146

