

ME10V3-DH350H 8 Ω

- 90° x 60° angular coverage
- 60 W continuous program power capacity
- 36 mm (1.7 in) aluminium voice coil
- HT Polymer diaphragm
- 1000 - 17000 Hz response
- 108.5 dB sensitivity



ME10V3-DH350H 8 Ω

SPECIFICATIONS HORN UNIT

Throat Diameter	25 mm (1 in)
Nominal Coverage Horizontal	90 °
Nominal Coverage Vertical	60 °
Cutoff Frequency	1.5 kHz
Material	ABS
Design	Hyperbolic Cosine Flare

SPECIFICATIONS HF UNIT

Throat Diameter	25 mm (1 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.9 Ω
Nominal Power Handling	30 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance</small>	
Continuous Power Handling	60 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	108.5 dB
<small>Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.</small>	
Frequency Range	1 kHz - 17 kHz
Recommended Crossover	1.5 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	36 mm (1.4 in)
Winding Material	Aluminium
Inductance	0.09 mH
Flux Density	1.8 T
Diaphragm Material	HT Polymer



MOUNTING AND SHIPPING INFO

Depth	152 mm (5.98 in)
Net Weight	0.47 kg (1.04 lb)



SERVICE KITS

HF replacement-diaphragm	MMDDH3508
--------------------------	------------------


ME10V3-DH350H 8 Ω

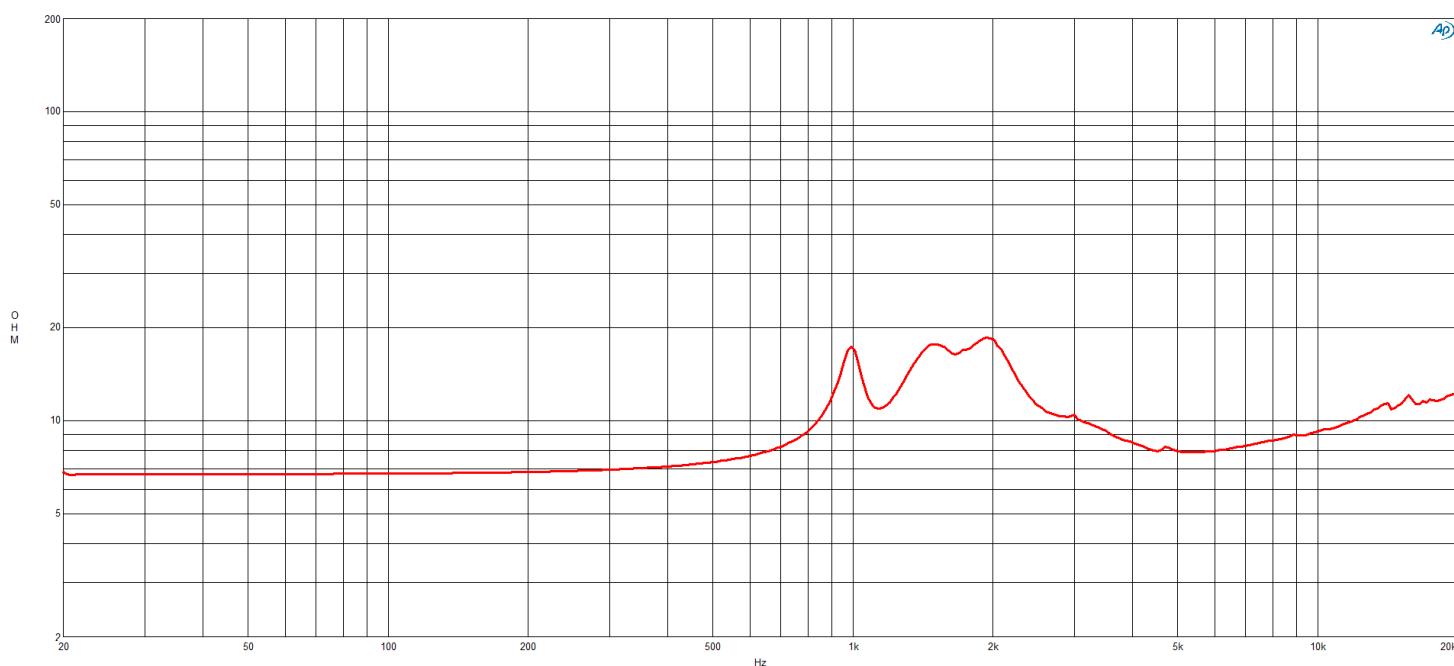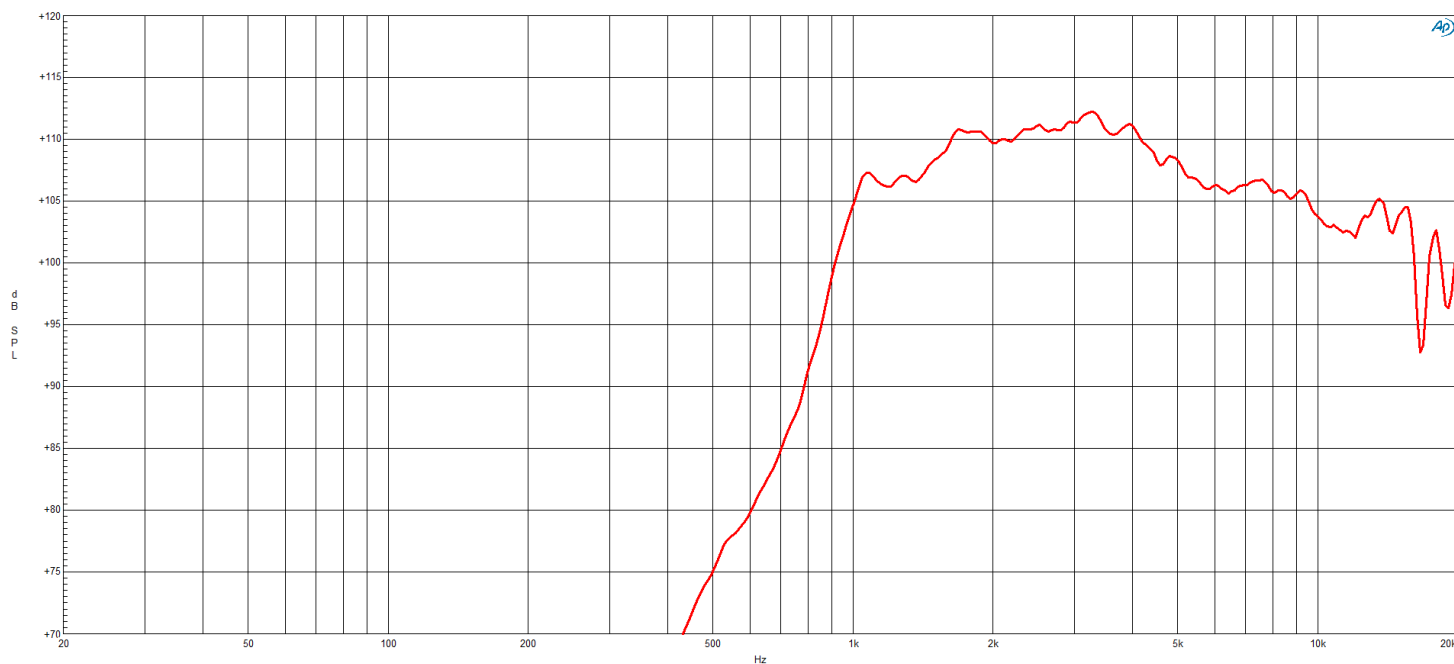

ME10V3-DH350H 8 Ω

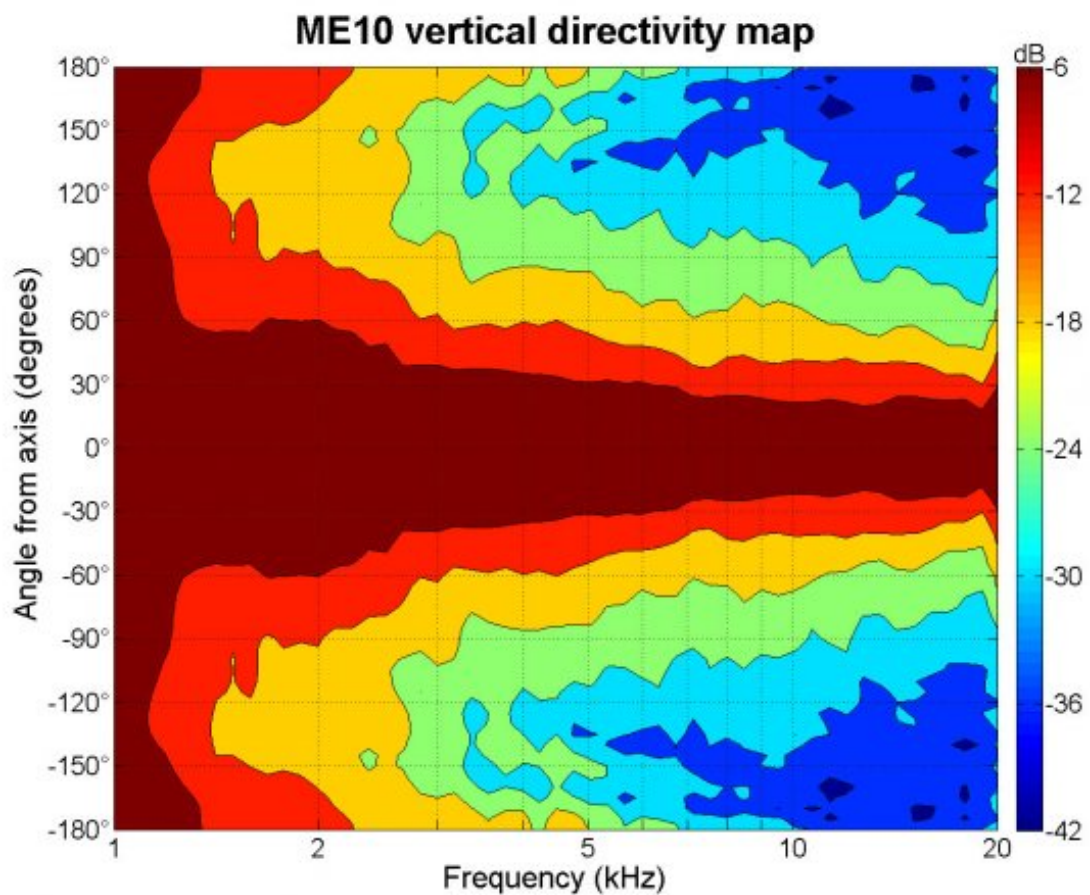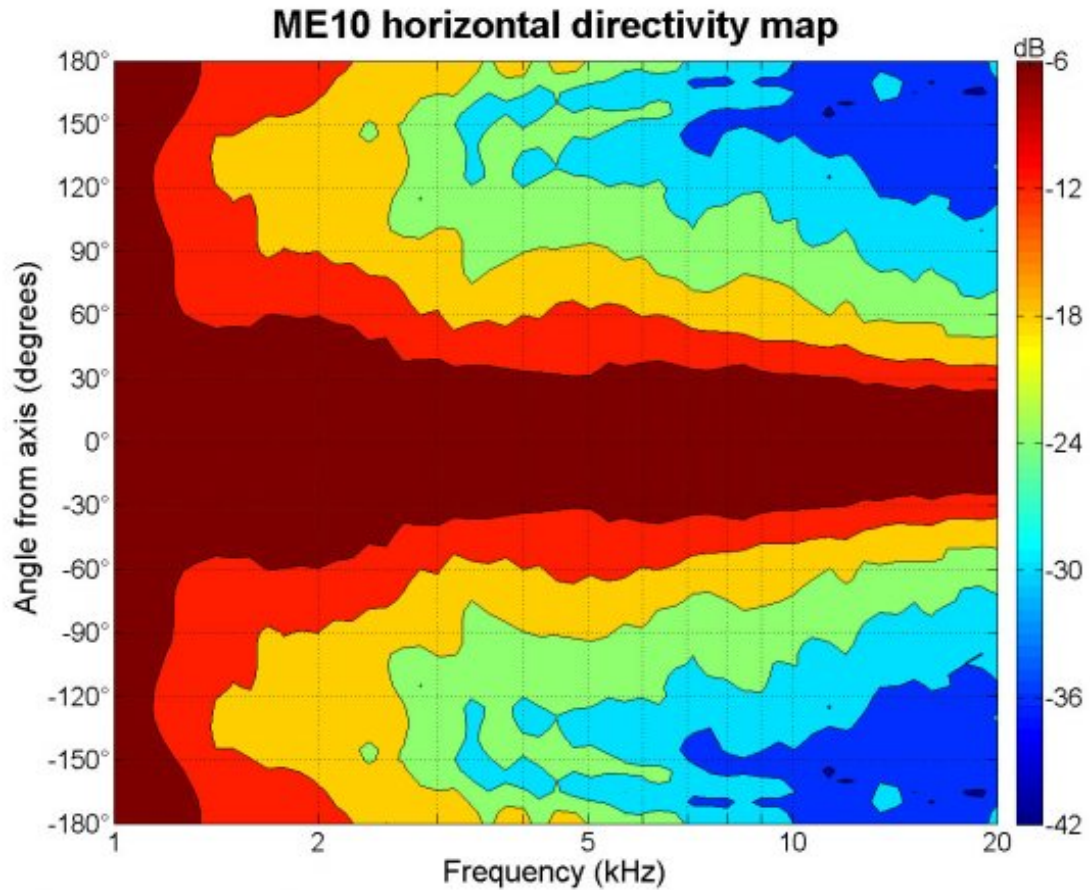

ME10V3-DH350H 8 Ω

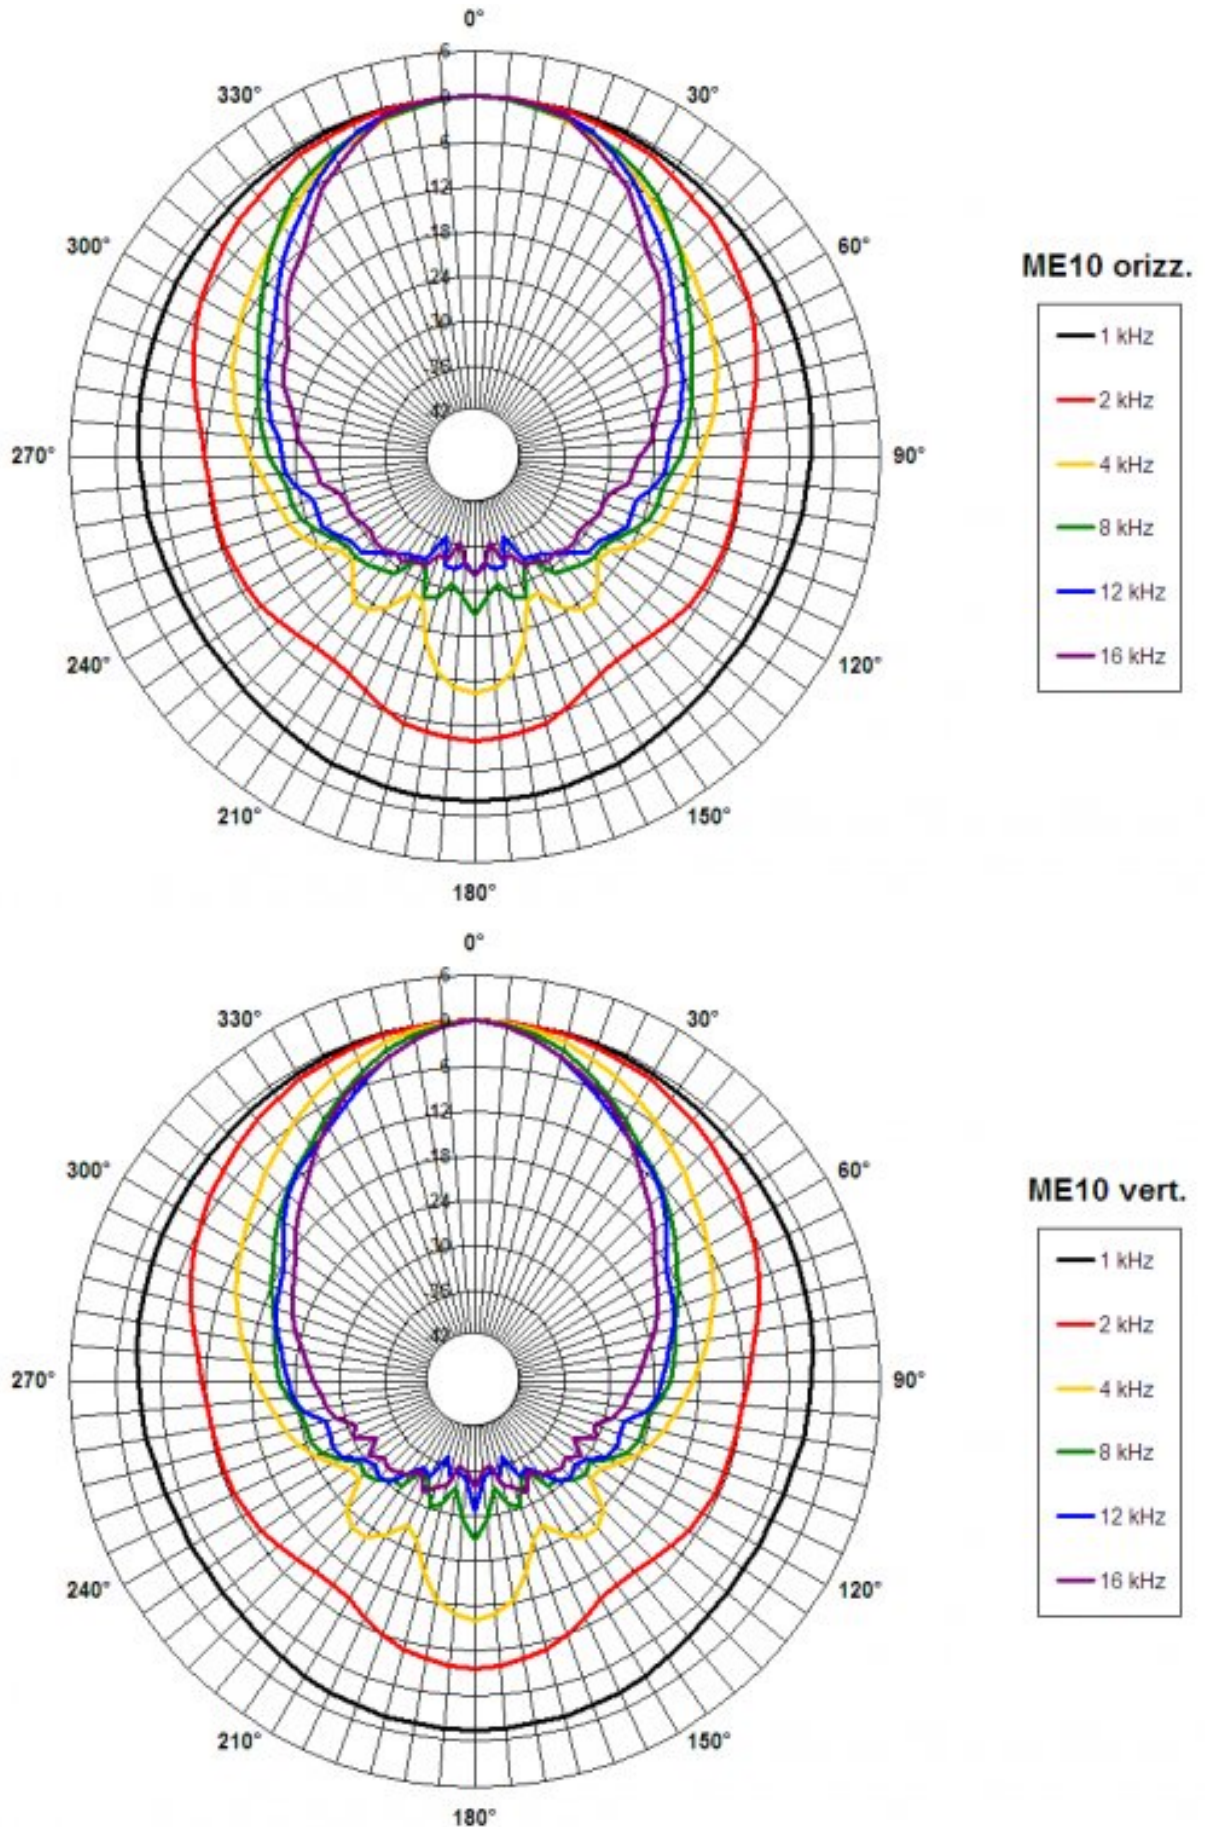

ME10V3-DH350H 8 Ω

