

ME148

SPECIFICATIONS

<p>Horn mounted on B&C DCX464 compression driver.</p>

| | |
|-----------------------------|--|
| Throat Diameter | 36 mm (1.4 in) |
| Nominal Coverage Horizontal | 120° |
| Cutoff Frequency | 0.5 kHz |
| Material | Polycarbonate |
| Design | Line Array Optimized Waveguide |
| Dimensions | 240x80x174.5 mm (9.4x3.15x6.9 in) |



MOUNTING AND SHIPPING INFO

| | |
|-----------------|--|
| Net Weight | 0.75 kg (1.65 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 1.2 kg (2.65 lb) |
| Shipping Box | 255x255x150 mm (10x10x5.9 in) |

- 1.4" throat entry
- Line Array optimized Waveguide
- 120° max horizontal coverage
- Vertical coverage depends on configuration
- Very good loading down to 500 Hz
- Designed specifically for the extra octaves present in our coaxial compression driver



ME148

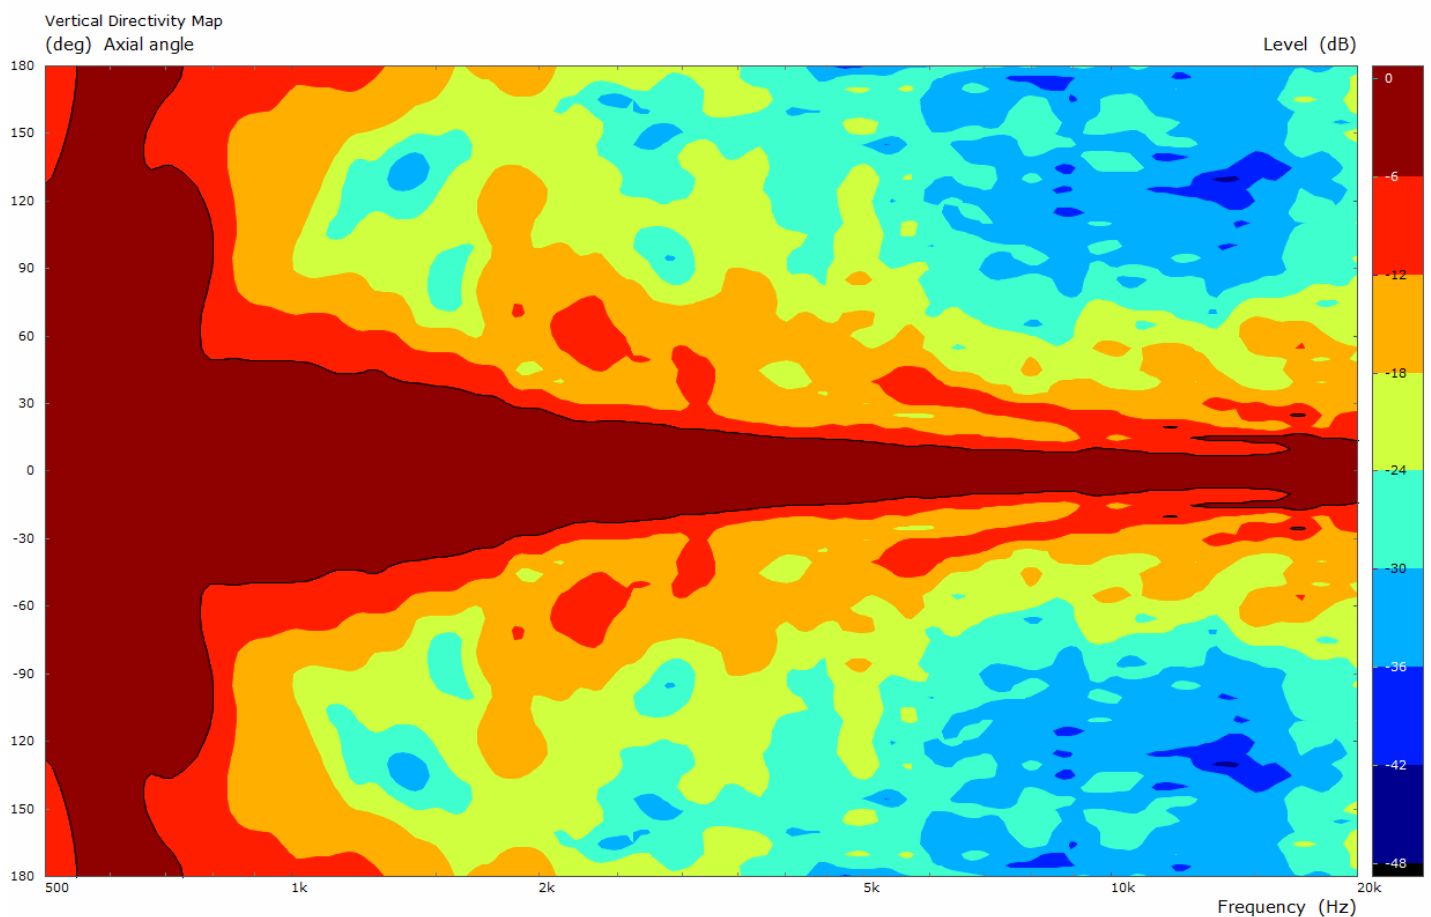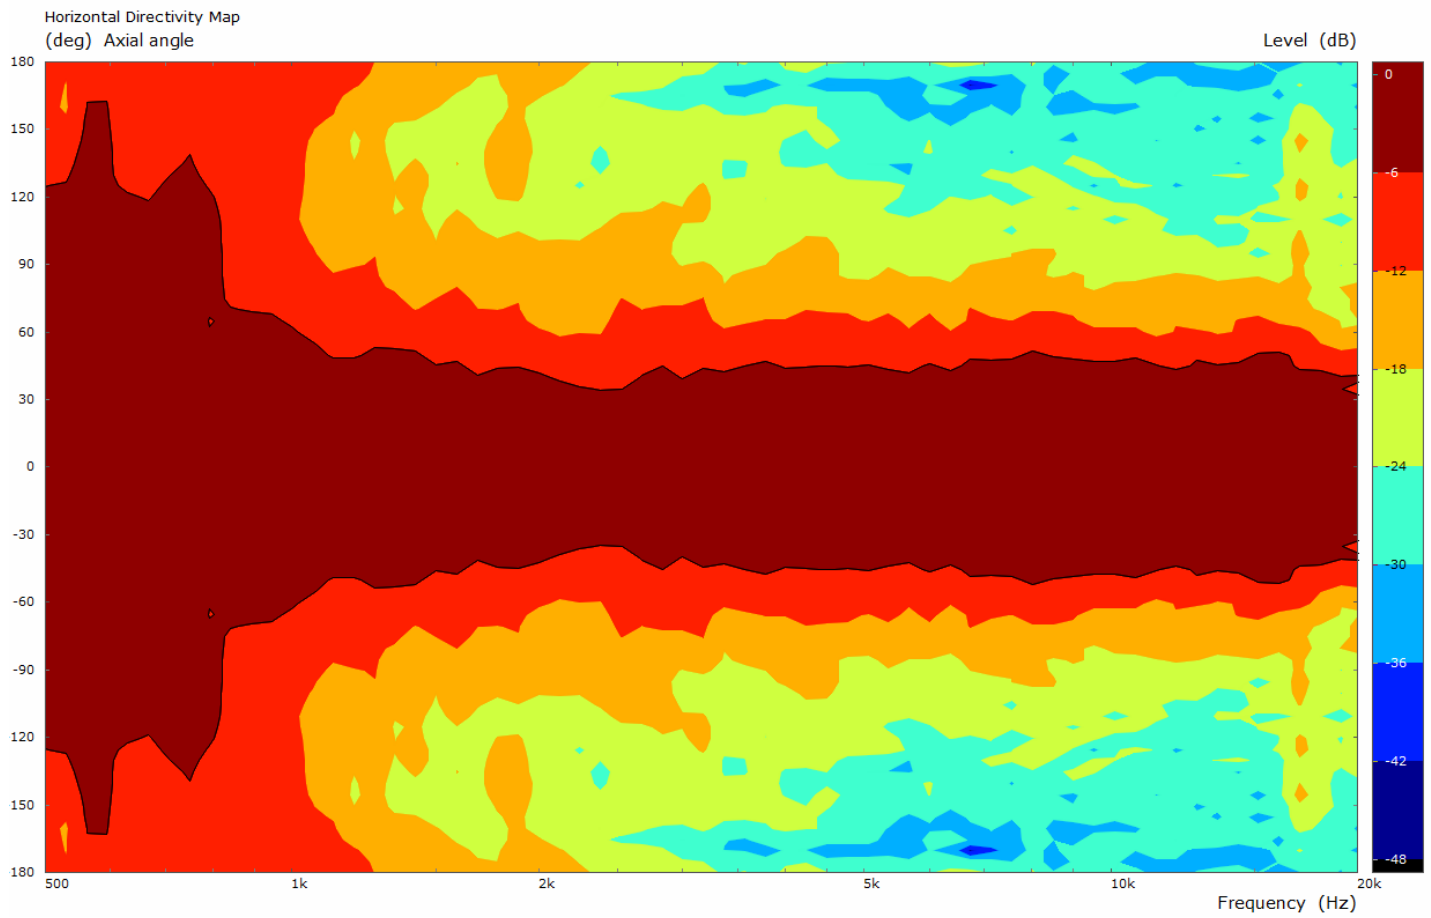

ME148

