

ME464+464 8 Ω

- Constant Directivity horn with [DCX464](#) driver and [ME464](#) horn
- Time coherent coaxial ring radiator design (Patents EP3644623B1, US11343608B2)
- 80x60° nominal coverage
- 109.4 dB sensitivity
- 220 W continuous program power capacity
- Neodymium magnet assembly
- Recommended hardware for horn mounting: four M6x12 screws
- revised 20/10/20



ME464+464 8 Ω

SPECIFICATIONS HORN UNIT

Nominal Impedance	8 Ω
Nominal Coverage Horizontal	80 °
Nominal Coverage Vertical	60 °
Cutoff Frequency	0.3 kHz

SPECIFICATIONS HF UNIT

Minimum Impedance	9.3 Ω
Nominal Power Handling	80 W
<small>2 hour test made with continuous pink noise signal (6 dB crest factor) within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	160 W
<small>Power on Continuous Program is defined as 3 dB greater then the Nominal rating.</small>	
Sensitivity	105.8 dB
<small>Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.</small>	
Frequency Range	3.5 kHz - 18 kHz
Recommended Crossover	4 kHz
<small>12 dB/oct. Or higher slope high-pass filter.</small>	
Voice Coil Diameter	65 mm (2.56 in)
Winding Material	Aluminium
Inductance	0.1 mH
Flux Density	2.14 T
Diaphragm Material	HT Polymer Ring

SPECIFICATIONS MF UNIT

Minimum Impedance	6.3 Ω
Nominal Power Handling	110 W
<small>AES Standard</small>	
Continuous Power Handling	220 W
<small>Power on Continuous Program is defined as 3 dB greater then the Nominal rating.</small>	
Sensitivity	109.4 dB
<small>Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.</small>	
Frequency Range	0.3 kHz - 5.5 kHz
Recommended Crossover	0.3 kHz
<small>12 dB/oct. Or higher slope high-pass filter.</small>	
Voice Coil Diameter	100 mm (4 in)
Winding Material	Aluminium
Inductance	0.21 mH
Flux Density	1.9 T
Diaphragm Material	HT Polymer Ring

MOUNTING AND SHIPPING INFO



Recommended hardware for horn mounting: four M6x12 screws

Baffle Cutout Diameter	538 mm (21.18 in)
Net Weight	8.5 kg (18.74 lb)
Driver Diameter	152 mm (5.98 in)
Dimensions	575x505x539 mm (22.64x19.88x21.22 in)



SERVICE KITS

HF replacement-diaphragm	MMDDCX464HF8
MF replacement-diaphragm	MMDDCX464MF8

ME464+464 8 Ω

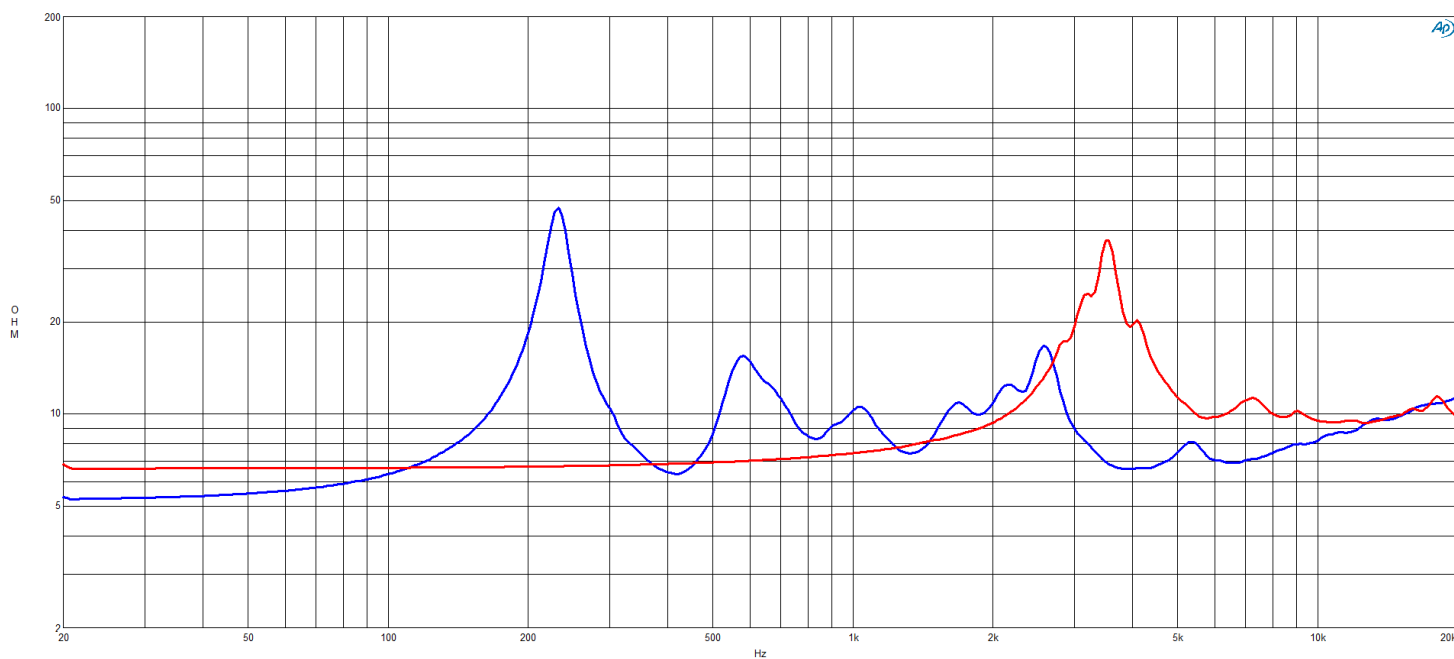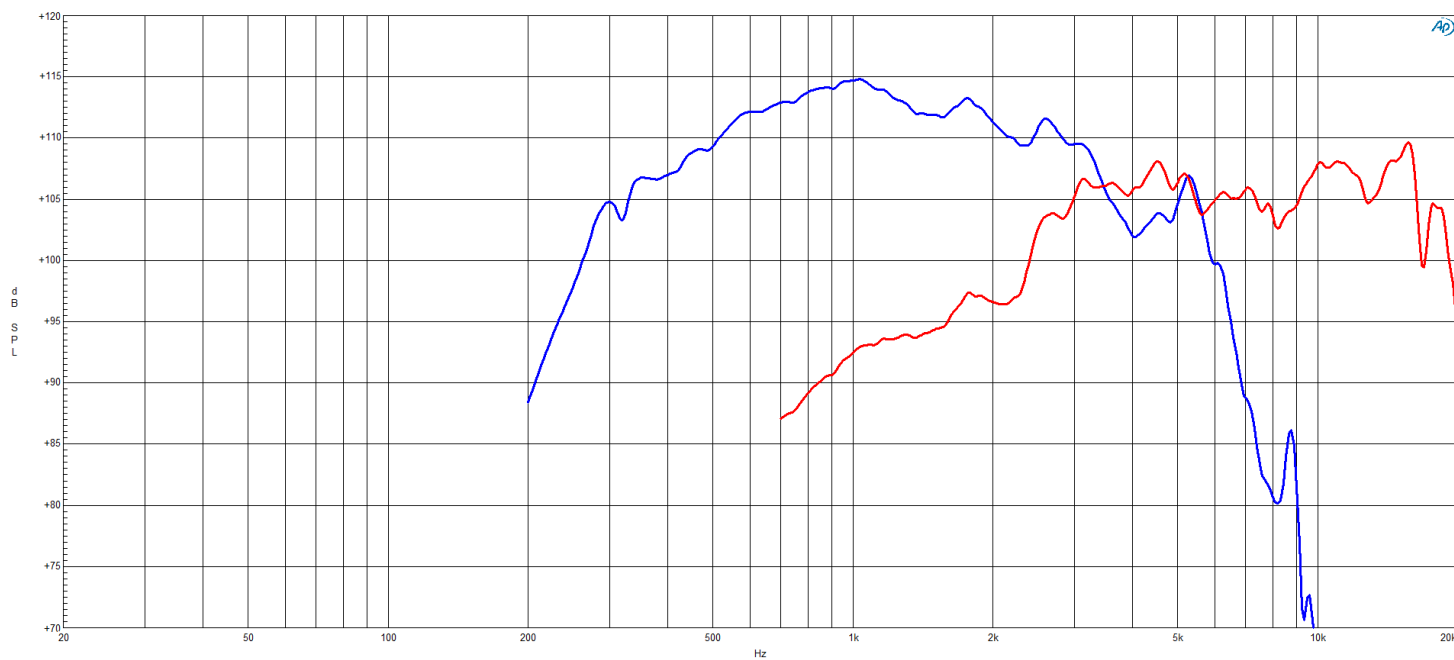

ME464+464 8 Ω

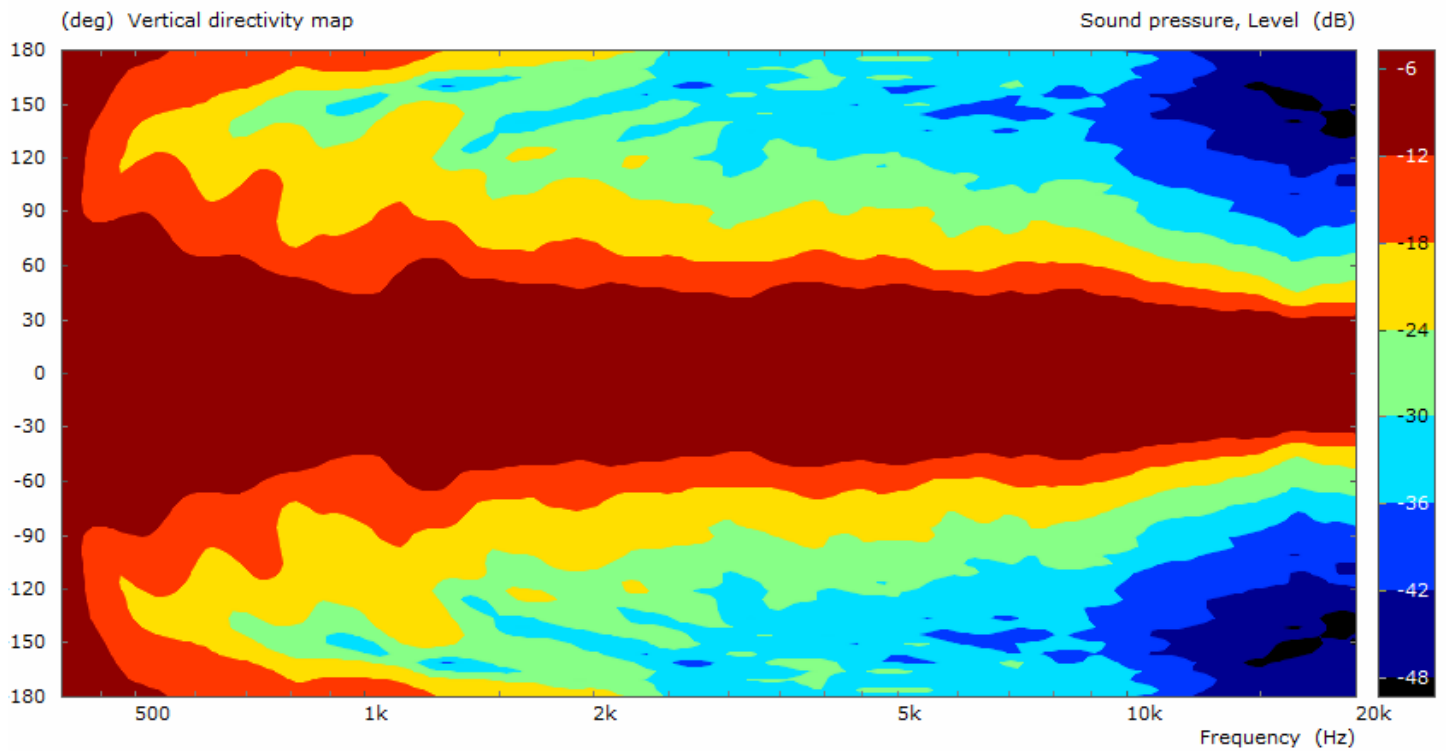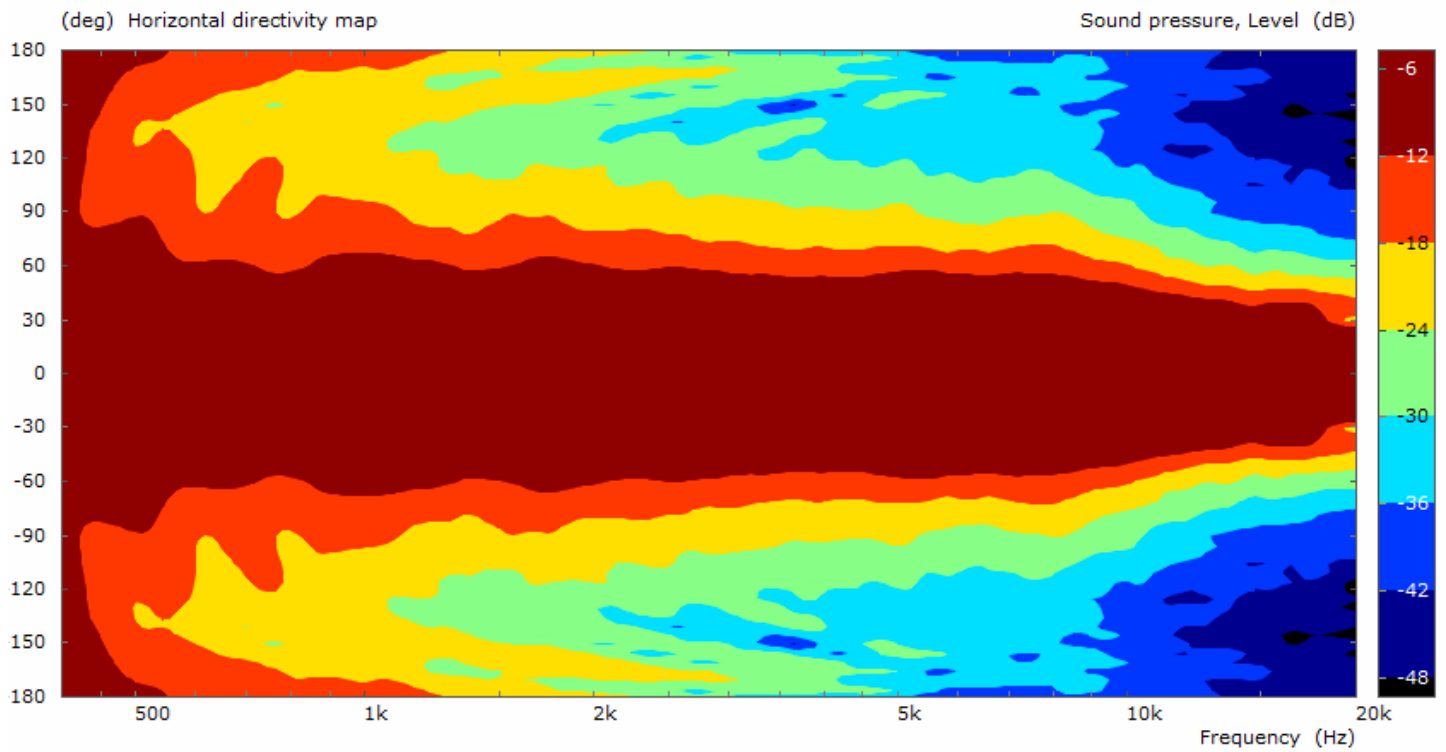

ME464+464 8 Ω

