

# Crossovers

## FBCXN36 8 Ω

### SPECIFICATIONS


Nominal Impedance	8 Ω
Crossover Frequency	1 kHz
Filter Type	Two Way
Slope	12 - 6 dB/oct
Overall Dimensions	100x76 mm (3.94x2.99 in)

### MOUNTING AND SHIPPING INFO

Other details	Four 4 mm diameter holes on the PCB at 90 mm x 66 mm for mounting
Net Weight	0.22 kg (0.49 lb)
Shipping Units	1 pcs
Shipping Weight	0.25 kg (0.54 lb)
Shipping Box	120x125x35 mm (4.72x4.92x1.38 in)


### POTENTIAL APP. COAXIALS

4CXN36	8 Ω
5CXN36	8 Ω
6CXN36	8 Ω

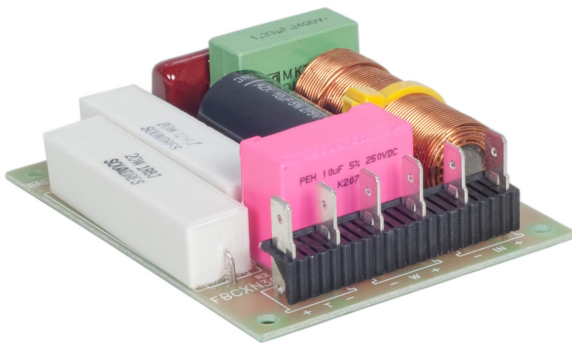



Dedicated crossover network for 4CXN36, 5CXN36 and 6CXN36 Coaxials.

8 Ω low-pass section  
16 Ω high-pass section

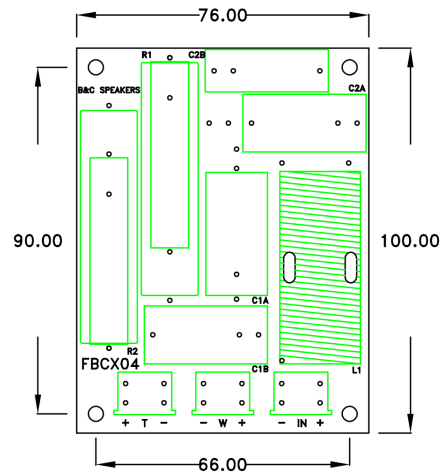

# Crossovers

## FBCXN36 8 $\Omega$

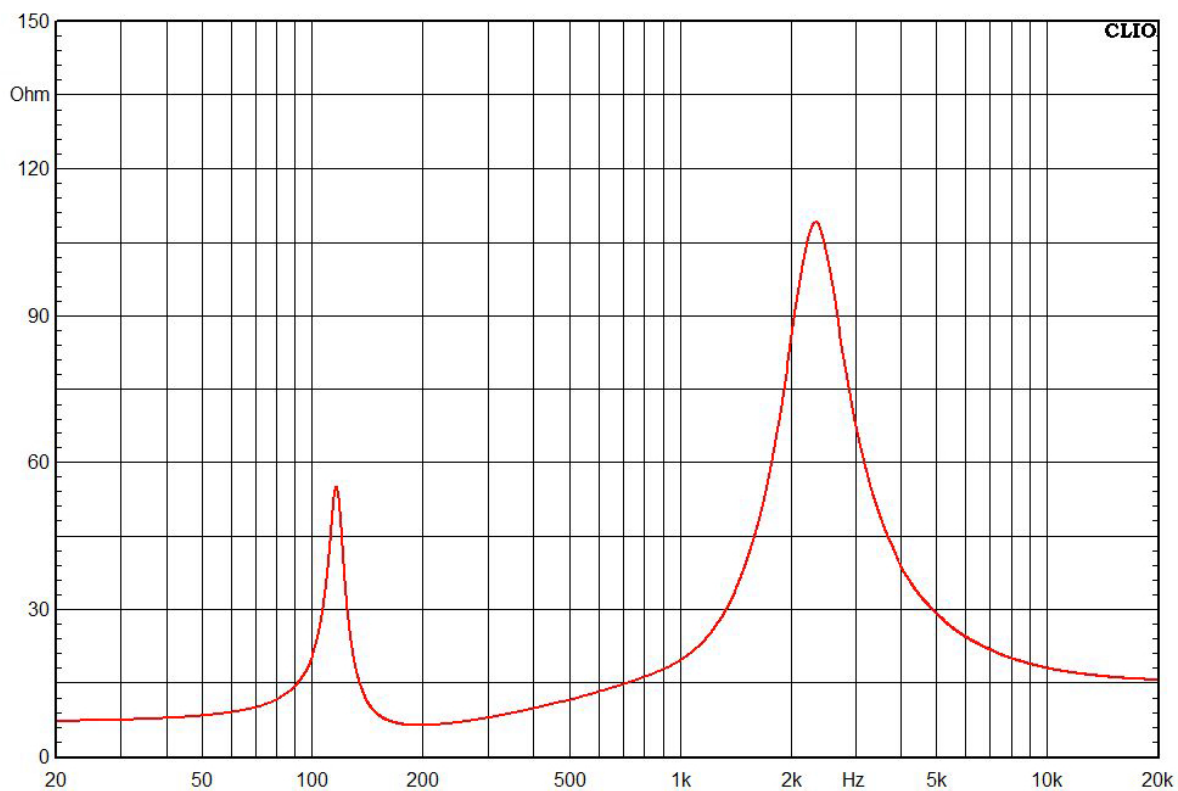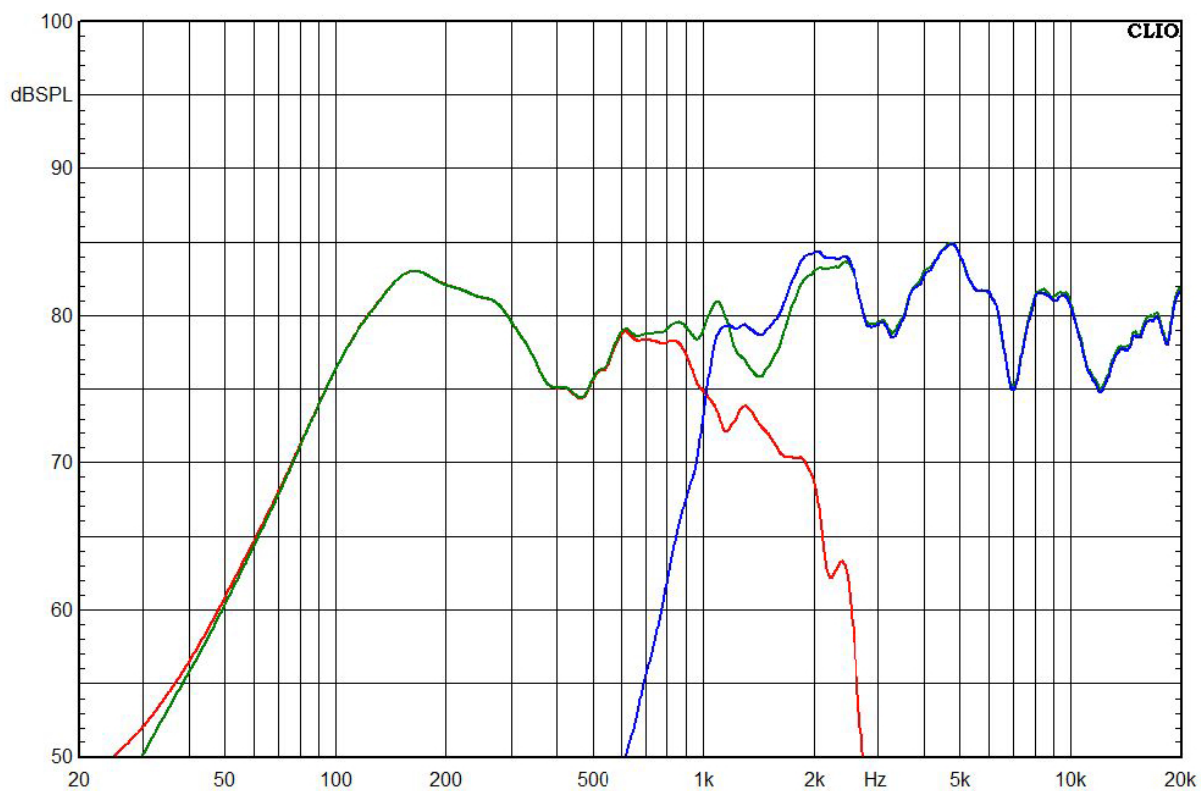

# Crossovers

## FBCXN36 8 Ω

