

DE64TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn + 2"-1.4" adapter

Throat Diameter	50 mm (2 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.4 Ω
Nominal Power Handling	110 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	220 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	107.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 18 kHz
Recommended Crossover	1 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.6 T
Diaphragm Material	Titanium

- 220 W continuous program power capacity
- 2" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- 500 - 18000 Hz response
- 107.5 dB sensitivity
- Shorting copper cap for extended HF response

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	156 mm (6.1 in)
Depth	66 mm (2.6 in)
Net Weight	3.9 kg (8.6 lb)
Shipping Units	1 pcs
Shipping Weight	4.02 kg (8.86 lb)
Shipping Box	190x190x80 mm (7.48x7.48x3.15 in)

SERVICE KITS

HF replacement-diaphragm	MMD3BTN8M
--------------------------	------------------



DE64TN 8 Ω

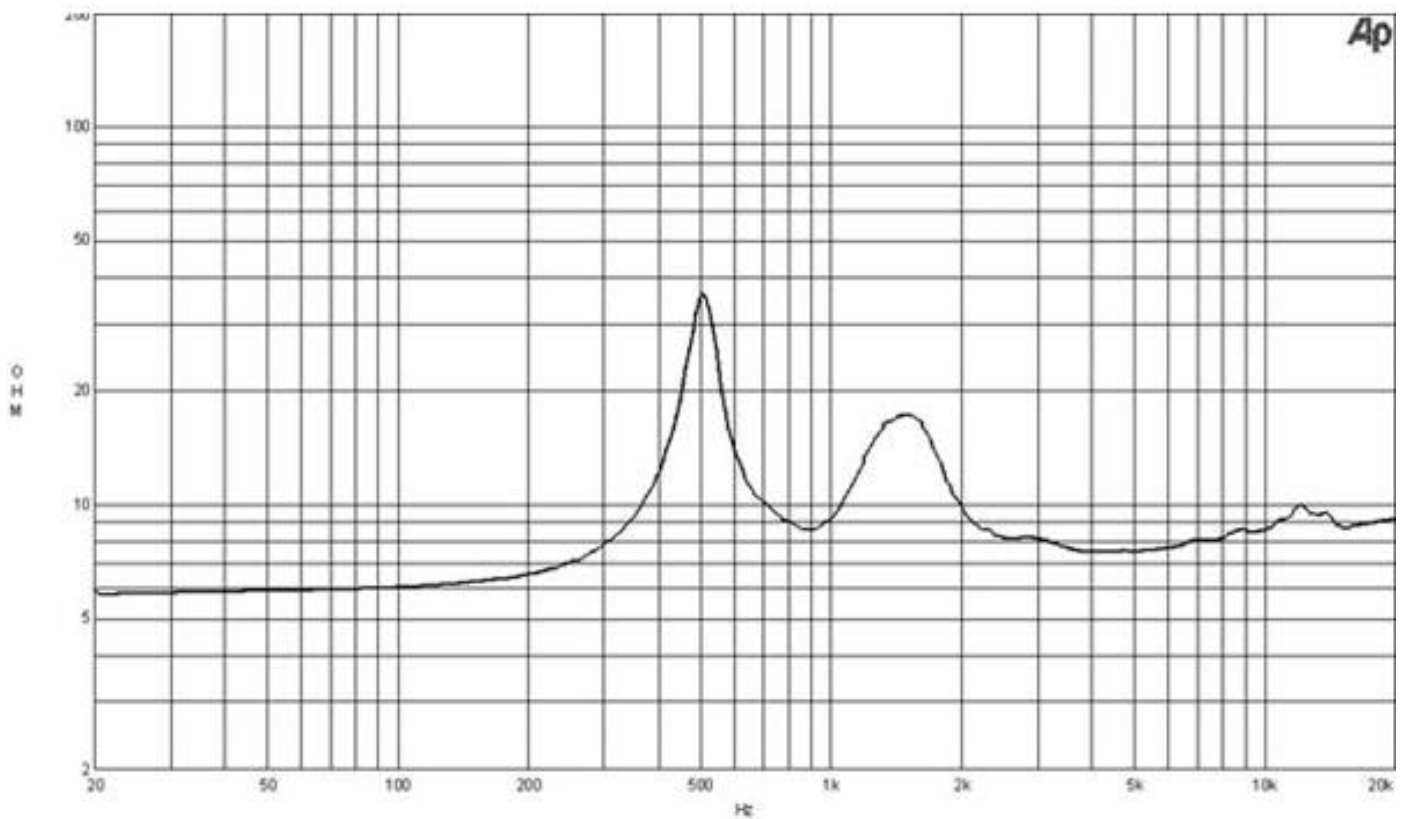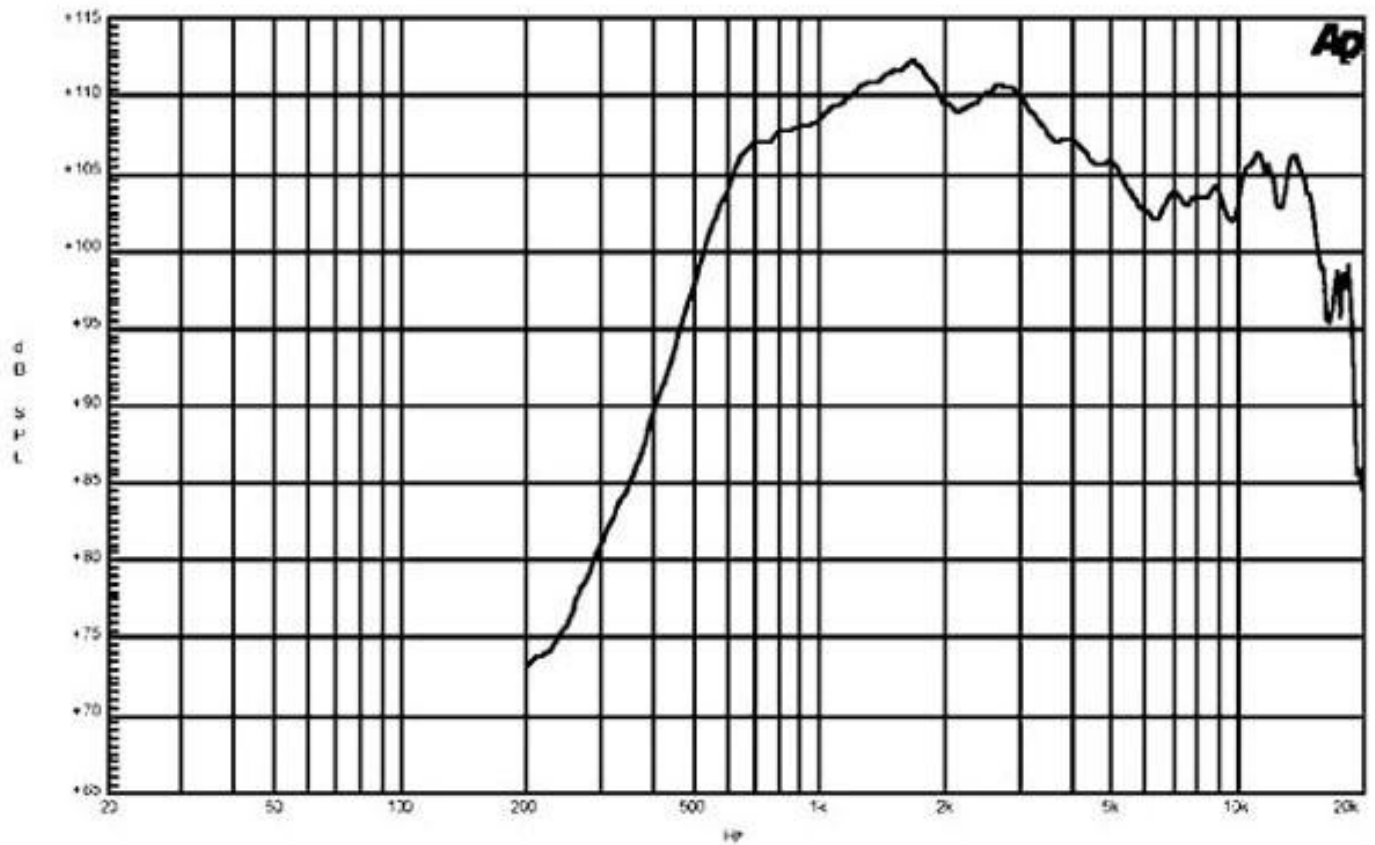

DE64TN 8 Ω

